



# KT-LED54PSHID-EX39-8XX-D / G4


## HID REPLACEMENT LED LAMP

### DESCRIPTION

54W HID Replacement LED Lamp | Power Select | 80 CRI | IP64



<b>LAMP TYPE:</b> HID Replacement LED
<b>BASE TYPE:</b> EX39 (Mogul)
<b>SELECTABLE WATTAGE:</b> 54W, 45W, 36W
<b>COLOR TEMPERATURE:</b> 3000K, 4000K, 5000K
<b>METAL HALIDE EQUIVALENT:</b> 200W
<b>COLOR RENDERING INDEX (CRI):</b> > 80
<b>WARRANTY:</b> 5 Years

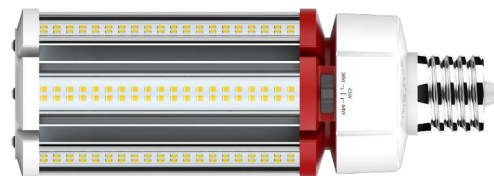


### PRODUCT FEATURES

- Replacement for conventional metal halide lamp
- Environmentally friendly: No mercury used
- Instant startup
- Integral driver eliminates the need for external driver or ballast; includes 4kV surge protection
- Not for use with standard dimmers; see instructions
- 50,000+ hour lifetime
- Operating temperature: -30°C/-22°F to 45°C/113°F
- Suitable for use in fully enclosed fixtures
- Minimum lamp compartment dimensions: 8.0" x 8.0" x 10.0"
- UL listed
- IP64 rated; integrated heat sink quickly dissipates heat and guides water intrusion out of the lamp

### ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Input Voltage	Selectable Power	CCT	Lumens	Efficacy	Base	CRI	PF
KT-LED54PSHID-EX39-830-D / G4	120-277V	54W	3000K	7290	135 lm/W	EX39	> 80	≥90
		45W		6075	135 lm/W			
		36W		4860	135 lm/W			
KT-LED54PSHID-EX39-840-D / G4	120-277V	54W	4000K	7560	140 lm/W	EX39	> 80	≥90
		45W		6300	140 lm/W			
		36W		5040	140 lm/W			
KT-LED54PSHID-EX39-850-D / G4	120-277V	54W	5000K	7830	145 lm/W	EX39	> 80	≥90
		45W		6525	145 lm/W			
		36W		5220	145 lm/W			

### SELECTABILITY


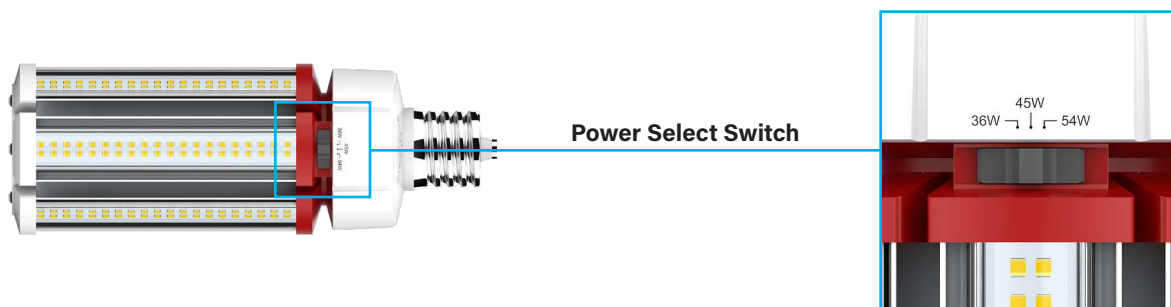




# KT-LED54PSHID-EX39-8XX-D / G4

## HID REPLACEMENT LED LAMP

### PHYSICAL CHARACTERISTICS

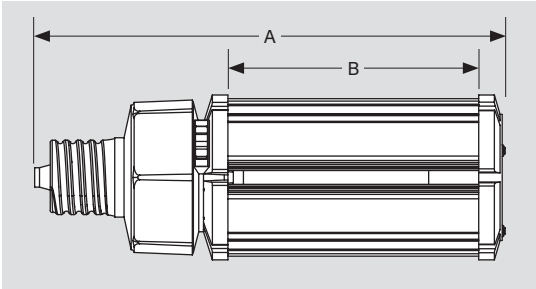

### LAMP DIMENSIONS

A (Body Length)	9.49"
B (Illuminated Length)	5.55"
C (Diameter)	3.35"


**BASE TYPE:** EX39 (Mogul)

### WIRING INSTRUCTIONS

#### STEP 1


**Disconnect power.** Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

*Note:* Follow all federal and local regulations when disposing of lamps and removed components.

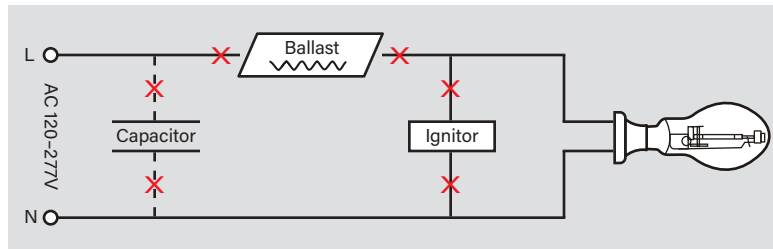



#### STEP 2

Rewire for line voltage to the lamp socket.


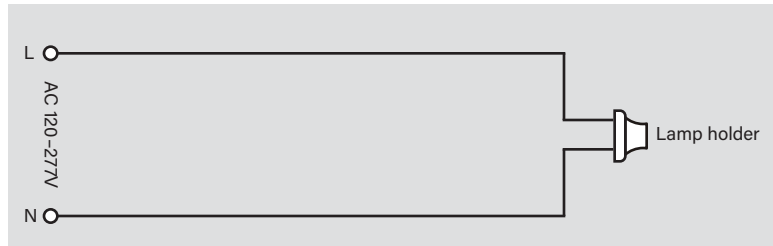


#### STEP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.

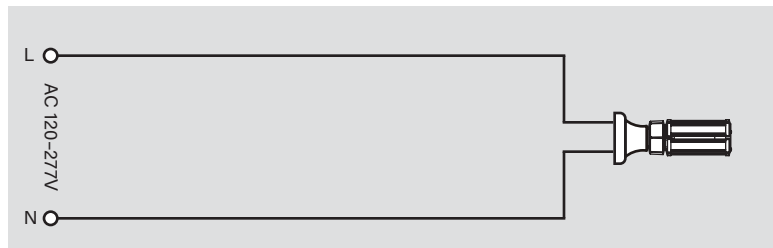

**EX39-based lamps** will work in *both* **E39** and **EX39** sockets.

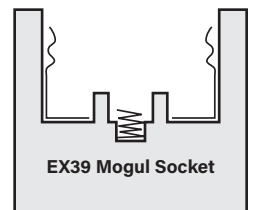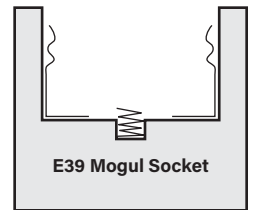



# KT-LED54PSHID-EX39-8XX-D /G4

## HID REPLACEMENT LED LAMP

**ORDERING INFORMATION**

ORDER CODE	PACK QTY.	UPC	EASY CODE	DLC PRODUCT ID
KT-LED54PSHID-EX39-830-D /G4	16	843654138336	PNS-04	PU0SSIHJ
KT-LED54PSHID-EX39-840-D /G4	16	843654138343	ZRU-34	P90ITKQU
KT-LED54PSHID-EX39-850-D /G4	16	843654138350	ZZE-30	PM76BL7V

**CATALOG NUMBER BREAKDOWN**

# KT-LED54PSHID-EX39-8XX-D /G4

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

- 1** Keystone Technologies
- 2** LED Lamp
- 3** Wattage
- 4** Power Select
- 5** Lamp Type
- 6** Base Type
- 7** 80 CRI
- 8** Color Temperature
- 9** Direct Drive
- 10** Fourth Generation