




Troffers, Panels, and Retrofit Kits



- 4 Center Basket Troffer & Retrofit Kits
- 6 Back-Lit Panel & Retrofit Kits
- 8 Back-Lit Panel with Pre-installed Emergency Backup
- 10 Product Specs

A full range of lighting capabilities.

Our center baskets and panels add beautiful light to any indoor setting with features that save energy and make your environment brighter. Whether you're adding new fixtures or upgrading legacy products, Keystone has the solution for you.




Versatility & SKU Reduction

Power and Color Select technology allows end users to choose from multiple outputs by flicking a switch, and helps distributors stock fewer SKUs.



Wireless Control

Integrated SmartLoop wireless lighting control is available on all Keystone troffers. Center baskets are Controls Ready, so you can add SmartLoop or another manufacturer's system by switching an end cap.




Powered by Keystone

Our Keystone drivers are 100% end-of-line tested, rugged, and reliable, so you can count on their performance.



Energy Savings

Our troffer fixtures provide powerful, energy-efficient LED lighting, reducing energy costs.



Compatible with Emergency Backups

All Standard panels, Standard center baskets, and Controls Ready center baskets are compatible with Keystone SmartSafe emergency backups to add dependable operation in emergency situations.

Center Basket Troffer & Retrofit Kits

Sizes: 1'x4', 2'x4', 2'x2'

Controls Ready

Install today and easily add your preferred wireless lighting control when ready to upgrade your space



SMART LOOP WIRELESS CONTROLS

Can be pre-installed or easily added in the field with a simple plug-in connection



POWER SELECT
COLOR SELECT

EVEN LIGHT DISTRIBUTION

Frosted lens makes hot spots a non-issue for all fixtures and retrofit kits

3RD PARTY CONTROLS

Compatible with other manufacturers' controls with changeable end caps

SIMPLIFY EMERGENCY OPTIONS

Easily add Keystone emergency backup with mounting accessory

Retrofit Kit

Everything you need in one kit
No need to modify existing fixture mounting or remove from ceiling



DESIGNED FOR KEYSTONE SMART LOOP

Field-accessible socket for simple wireless lighting control sensors

Also available in:

Standard



- No sensor cover offers clean, symmetrical look
- Keystone LED dimming driver
- Power and Color Select
- Flexible installation options

Retrofit Kit



- Pre-installed Keystone LED driver
- Power and Color Select
- No need to remove old fixture, or break plenum

Back-Lit Panel & Retrofit Kits

Sizes: 1'x4', 2'x4', 2'x2'

SmartLoop Integrated Back-Lit Panel

Simply manage your lighting with easily programmable wireless lighting control



EVEN LIGHT DISTRIBUTION

Frosted lens makes hot spots a non-issue for all fixtures and retrofit kits



WIRELESS CONTROL

Available with integrated SmartLoop controls

Standard Fixture

KEYSTONE DRIVER

100% end-of-line tested, rugged, and reliable



WIRELESS CONTROL

Available with integrated SmartLoop controls

Retrofit Kit

Everything you need in one kit
No need to modify existing fixture mounting or remove from ceiling

Also available in:

Contractor Prime



- Keystone LED dimming driver
- Power and Color Select
- On DLC Qualified Products List (QPL)

Retrofit Kit



- Pre-installed Keystone LED driver
- Power and Color Select
- No need to remove old fixture, or break plenum

Back-Lit Panel Integrated EMRG

Sizes: 2'x4', 2'x2'

SMART//SAFE

Pre-installed Emergency Backup Back-Lit Panel

Panels are available with pre-installed SmartSafe backup power sources to simplify emergency operations

TEST SWITCH AND LED INDICATOR

For easy testing of functionality and reliability



KEYSTONE DRIVER

100% end-of-line tested, rugged, and reliable



EASY J-BOX ADD-ON

Included larger J-box for more room to make switched leg or daisy chain connections

EMERGENCY BACKUP

Integrated 8W battery capable of 90 minutes of illumination

RUGGED CONSTRUCTION

Stamped steel body in an aluminum frame

J-BOX INSTALLED

Installed at shipping to improve ease of connection and installation

EVEN LIGHT DISTRIBUTION

Frosted lens makes hot spots a non-issue for all fixtures and retrofit kits

For additional emergency options:

Our other Back-Lit Panels, including Standard and Contractor Prime models, are compatible with our SmartSafe backups to add emergency capabilities.



- Available in 5W and 12W options
- 90 minutes of emergency operation
- Can be installed at the factory for convenience

Center Basket Troffer

Power and Color Select | SmartLoop Embedded | FC5



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-CBLED35PS-14C-8CSA-VDIM /FC5	1'x4'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-CBLED24PS-22C-8CSA-VDIM /FC5	2'x2'	24W	3500K	2025	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2070	134 lm/W				
			5000K	2085	135 lm/W				
		18W	3500K	2340	128 lm/W				
			4000K	2430	132 lm/W				
			5000K	2448	133 lm/W				
		15W	3500K	3000	125 lm/W				
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
KT-CBLED35PS-22C-8CSA-VDIM /FC5	2'x2'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-CBLED30PS-24C-8CSA-VDIM /FC5	2'x4'	30W	3500K	2700	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2760	134 lm/W				
			5000K	2780	135 lm/W				
		25W	3500K	3250	128 lm/W				
			4000K	3375	132 lm/W				
			5000K	3400	133 lm/W				
		20W	3500K	3750	125 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
KT-CBLED45PS-24C-8CSA-VDIM /FC5	2'x4'	45W	3500K	4050	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	4140	134 lm/W				
			5000K	4170	135 lm/W				
		38W	3500K	4940	128 lm/W				
			4000K	5130	132 lm/W				
			5000K	5168	133 lm/W				
		30W	3500K	5625	125 lm/W				
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				

Center Basket Troffer

Power and Color Select | Controls Ready



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-CBLED35PS-14C-8CSA-VDIM /CR	1'x4'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-CBLED24PS-22C-8CSA-VDIM /CR	2'x2'	24W	3500K	2025	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2070	134 lm/W				
			5000K	2085	135 lm/W				
		18W	3500K	2340	128 lm/W				
			4000K	2430	132 lm/W				
			5000K	2448	133 lm/W				
		15W	3500K	3000	125 lm/W				
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
KT-CBLED35PS-22C-8CSA-VDIM /CR	2'x2'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-CBLED30PS-24C-8CSA-VDIM /CR	2'x4'	30W	3500K	2700	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2760	134 lm/W				
			5000K	2780	135 lm/W				
		25W	3500K	3250	128 lm/W				
			4000K	3375	132 lm/W				
			5000K	3400	133 lm/W				
		20W	3500K	3750	125 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
KT-CBLED45PS-24C-8CSA-VDIM /CR	2'x4'	45W	3500K	4050	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	4140	134 lm/W				
			5000K	4170	135 lm/W				
		38W	3500K	4940	128 lm/W				
			4000K	5130	132 lm/W				
			5000K	5168	133 lm/W				
		30W	3500K	5625	125 lm/W				
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				

Sensors

Catalog number	Description	
KTSL-FC5-12V-IM-PIR	Bluetooth mesh wireless low-voltage individual fixture controller for SmartLoop system, Integral Mount	

Center Basket Troffer

Power and Color Select



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-CBLED35PS-14C-8CSA-VDIM	1'x4'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-CBLED24PS-22C-8CSA-VDIM	2'x2'	24W	3500K	2025	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2070	134 lm/W				
			5000K	2085	135 lm/W				
		18W	3500K	2340	128 lm/W				
			4000K	2430	132 lm/W				
			5000K	2448	133 lm/W				
		15W	3500K	3000	125 lm/W				
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
KT-CBLED35PS-22C-8CSA-VDIM	2'x2'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-CBLED30PS-24C-8CSA-VDIM	2'x4'	30W	3500K	2700	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2760	134 lm/W				
			5000K	2780	135 lm/W				
		25W	3500K	3250	128 lm/W				
			4000K	3375	132 lm/W				
			5000K	3400	133 lm/W				
		20W	3500K	3750	125 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
KT-CBLED45PS-24C-8CSA-VDIM	2'x4'	45W	3500K	4050	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	4140	134 lm/W				
			5000K	4170	135 lm/W				
		38W	3500K	4940	128 lm/W				
			4000K	5130	132 lm/W				
			5000K	5168	133 lm/W				
		30W	3500K	5625	125 lm/W				
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				

Center Basket Troffer

Mounts and Brackets



Catalog Number	Description	
KT-CBLED-C-EM-KIT	Emergency LED Backup mounting kit for Keystone center basket troffers. (Style C) Includes bracket and mounting hardware.	
KT-CBLED-RMF-14-KIT	Recessed mount flange kit for 1x4 center basket fixtures	
KT-CBLED-RMF-22-KIT	Recessed mount flange kit for 2x2 center basket fixtures	
KT-CBLED-RMF-24-KIT	Recessed mount flange kit for 2x4 center basket fixtures	
KT-CBLED-SM-14-KIT	Surface mount kit for 1x4 LED center basket troffers	
KT-CBLED-SM-22-KIT	Surface mount kit for 2x2 LED center basket troffers	
KT-CBLED-SM-24-KIT	Surface mount kit for 2x4 LED center basket troffers	

Center Basket Troffer Retrofit Kit



Power and Color Select | SmartLoop Embedded | FC5

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14DC-8CSA-VDIM /FC5	1'x4'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-RKIT24PS-22DC-8CSA-VDIM /FC5	2'x2'	24W	3500K	2025	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2070	134 lm/W				
			5000K	2085	135 lm/W				
		18W	3500K	2340	128 lm/W				
			4000K	2430	132 lm/W				
			5000K	2448	133 lm/W				
		15W	3500K	3000	125 lm/W				
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
KT-RKIT35PS-22DC-8CSA-VDIM /FC5	2'x2'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-RKIT30PS-24DC-8CSA-VDIM /FC5	2'x4'	30W	3500K	2700	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2760	134 lm/W				
			5000K	2780	135 lm/W				
		25W	3500K	3250	128 lm/W				
			4000K	3375	132 lm/W				
			5000K	3400	133 lm/W				
		20W	3500K	3750	125 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
KT-RKIT45PS-24DC-8CSA-VDIM /FC5	2'x4'	45W	3500K	4050	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	4140	134 lm/W				
			5000K	4170	135 lm/W				
		38W	3500K	4940	128 lm/W				
			4000K	5130	132 lm/W				
			5000K	5168	133 lm/W				
		30W	3500K	5625	125 lm/W				
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				

Center Basket Troffer Retrofit Kit



Power and Color Select | Controls Ready

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14DC-8CSA-VDIM /CR	1'x4'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-RKIT24PS-22DC-8CSA-VDIM /CR	2'x2'	24W	3500K	2025	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2070	134 lm/W				
			5000K	2085	135 lm/W				
		18W	3500K	2340	128 lm/W				
			4000K	2430	132 lm/W				
			5000K	2448	133 lm/W				
		15W	3500K	3000	125 lm/W				
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
KT-RKIT35PS-22DC-8CSA-VDIM /CR	2'x2'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-RKIT30PS-24DC-8CSA-VDIM /CR	2'x4'	30W	3500K	2700	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2760	134 lm/W				
			5000K	2780	135 lm/W				
		25W	3500K	3250	128 lm/W				
			4000K	3375	132 lm/W				
			5000K	3400	133 lm/W				
		20W	3500K	3750	125 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
KT-RKIT45PS-24DC-8CSA-VDIM /CR	2'x4'	45W	3500K	4050	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	4140	134 lm/W				
			5000K	4170	135 lm/W				
		38W	3500K	4940	128 lm/W				
			4000K	5130	132 lm/W				
			5000K	5168	133 lm/W				
		30W	3500K	5625	125 lm/W				
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				

Sensors

Catalog number	Description	
KTSL-FC5-12V-IM-PIR	Bluetooth mesh wireless low-voltage individual fixture controller for SmartLoop system, Integral Mount	

Center Basket Troffer Retrofit Kit

Power and Color Select



FUTURE FIT

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14DC-8CSA-VDIM	1'x4'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-RKIT24PS-22DC-8CSA-VDIM	2'x2'	24W	3500K	2025	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2070	134 lm/W				
			5000K	2085	135 lm/W				
		18W	3500K	2340	128 lm/W				
			4000K	2430	132 lm/W				
			5000K	2448	133 lm/W				
		15W	3500K	3000	125 lm/W				
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
KT-RKIT35PS-22DC-8CSA-VDIM	2'x2'	35W	3500K	3240	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3312	134 lm/W				
			5000K	3336	135 lm/W				
		30W	3500K	3900	128 lm/W				
			4000K	4050	132 lm/W				
			5000K	4080	133 lm/W				
		24W	3500K	4375	125 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
KT-RKIT30PS-24DC-8CSA-VDIM	2'x4'	30W	3500K	2700	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	2760	134 lm/W				
			5000K	2780	135 lm/W				
		25W	3500K	3250	128 lm/W				
			4000K	3375	132 lm/W				
			5000K	3400	133 lm/W				
		20W	3500K	3750	125 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
KT-RKIT45PS-24DC-8CSA-VDIM	2'x4'	45W	3500K	4050	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	4140	134 lm/W				
			5000K	4170	135 lm/W				
		38W	3500K	4940	128 lm/W				
			4000K	5130	132 lm/W				
			5000K	5168	133 lm/W				
		30W	3500K	5625	125 lm/W				
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				

Center Basket Troffer

Power and Color Select | SmartLoop Embedded | FC2



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-CBLED35PS-14B-8CSA-VDIM / FC2	1'x4'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	4410	126 lm/W				
			5000K	4445	127 lm/W				
		30W	3500K	3900	130 lm/W				
			4000K	3930	131 lm/W				
			5000K	3960	132 lm/W				
		24W	3500K	3192	133 lm/W				
			4000K	3216	134 lm/W				
			5000K	3240	135 lm/W				
KT-CBLED24PS-22B-8CSA-VDIM / FC2	2'x2'	24W	3500K	3072	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
		18W	3500K	2412	134 lm/W				
			4000K	2430	135 lm/W				
			5000K	2448	136 lm/W				
		15W	3500K	2055	137 lm/W				
			4000K	2070	138 lm/W				
			5000K	2085	139 lm/W				
KT-CBLED35PS-22B-8CSA-VDIM / FC2	2'x2'	35W	3500K	4480	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
		30W	3500K	3930	131 lm/W				
			4000K	3960	132 lm/W				
			5000K	3990	133 lm/W				
		24W	3500K	3216	134 lm/W				
			4000K	3240	135 lm/W				
			5000K	3264	136 lm/W				
KT-CBLED30PS-24B-8CSA-VDIM / FC2	2'x4'	30W	3500K	3840	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		25W	3500K	3350	134 lm/W				
			4000K	3375	135 lm/W				
			5000K	3400	136 lm/W				
		20W	3500K	2740	137 lm/W				
			4000K	2760	138 lm/W				
			5000K	2780	139 lm/W				
KT-CBLED45PS-24B-8CSA-VDIM / FC2	2'x4'	45W	3500K	5760	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				
		38W	3500K	4978	131 lm/W				
			4000K	5016	132 lm/W				
			5000K	5054	133 lm/W				
		30W	3500K	4110	137 lm/W				
			4000K	4140	138 lm/W				
			5000K	4170	139 lm/W				

Center Basket Troffer

Power and Color Select





Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-CBLED35PS-14B-8CSA-VDIM	1'x4'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	4410	126 lm/W				
			5000K	4445	127 lm/W				
		30W	3500K	3900	130 lm/W				
			4000K	3930	131 lm/W				
			5000K	3960	132 lm/W				
		24W	3500K	3192	133 lm/W				
			4000K	3216	134 lm/W				
			5000K	3240	135 lm/W				
KT-CBLED24PS-22B-8CSA-VDIM	2'x2'	24W	3500K	3072	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	3096	129 lm/W				
			5000K	3120	130 lm/W				
		18W	3500K	2412	134 lm/W				
			4000K	2430	135 lm/W				
			5000K	2448	136 lm/W				
		15W	3500K	2055	137 lm/W				
			4000K	2070	138 lm/W				
			5000K	2085	139 lm/W				
KT-CBLED35PS-22B-8CSA-VDIM	2'x2'	35W	3500K	4480	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
		30W	3500K	3930	131 lm/W				
			4000K	3960	132 lm/W				
			5000K	3990	133 lm/W				
		24W	3500K	3216	134 lm/W				
			4000K	3240	135 lm/W				
			5000K	3264	136 lm/W				
KT-CBLED30PS-24B-8CSA-VDIM	2'x4'	30W	3500K	3840	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		25W	3500K	3350	134 lm/W				
			4000K	3375	135 lm/W				
			5000K	3400	136 lm/W				
		20W	3500K	2740	137 lm/W				
			4000K	2760	138 lm/W				
			5000K	2780	139 lm/W				
KT-CBLED45PS-24B-8CSA-VDIM	2'x4'	45W	3500K	5760	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				
		38W	3500K	4978	131 lm/W				
			4000K	5016	132 lm/W				
			5000K	5054	133 lm/W				
		30W	3500K	4110	137 lm/W				
			4000K	4140	138 lm/W				
			5000K	4170	139 lm/W				

Center Basket Troffer

Sensors for Power and Color Select Models



Catalog Number	Description	
KTSL-FC2-12V-SM-PIR	Bluetooth wireless integrated fixture controller	

Mounts and Brackets

Catalog Number	Description	
KT-CBLED-RMF-14-KIT	Recessed mount flange kit for 1x4 center basket fixtures	
KT-CBLED-RMF-22-KIT	Recessed mount flange kit for 2x2 center basket fixtures	
KT-CBLED-RMF-24-KIT	Recessed mount flange kit for 2x4 center basket fixtures	
KT-CBLED-SM-14-KIT	Surface mount kit for 1x4 LED center basket troffers	
KT-CBLED-SM-22-KIT	Surface mount kit for 2x2 LED center basket troffers	
KT-CBLED-SM-24-KIT	Surface mount kit for 2x4 LED center basket troffers	
KT-RKIT-DC-EM-KIT	Emergency LED Backup mounting kit for Keystone center basket doorframe kits. Includes bracket and mounting hardware.	

Center Basket Troffer Retrofit Kit

Power and Color Select | SmartLoop Embedded | FC2



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14DB-8CSA-VDIM / FC2	1'x4'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	4410	126 lm/W				
			5000K	4445	127 lm/W				
		30W	3500K	3840	128 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		24W	3500K	3144	131 lm/W				
			4000K	3168	132 lm/W				
			5000K	3192	133 lm/W				
KT-RKIT24PS-22DB-8CSA-VDIM / FC2	2'x2'	24W	3500K	3000	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	3024	126 lm/W				
			5000K	3048	127 lm/W				
		18W	3500K	2358	131 lm/W				
			4000K	2376	132 lm/W				
			5000K	2394	133 lm/W				
		15W	3500K	2010	134 lm/W				
			4000K	2025	135 lm/W				
			5000K	2040	136 lm/W				
KT-RKIT35PS-22DB-8CSA-VDIM / FC2	2'x2'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	4410	126 lm/W				
			5000K	4445	127 lm/W				
		30W	3500K	3840	128 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		24W	3500K	3144	131 lm/W				
			4000K	3168	132 lm/W				
			5000K	3192	133 lm/W				
KT-RKIT30PS-24DB-8CSA-VDIM / FC2	2'x4'	30W	3500K	3840	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		25W	3500K	3350	134 lm/W				
			4000K	3375	135 lm/W				
			5000K	3400	136 lm/W				
		20W	3500K	2740	137 lm/W				
			4000K	2760	138 lm/W				
			5000K	2780	139 lm/W				

Center Basket Troffer Retrofit Kit

Power and Color Select



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14DB-8CSA-VDIM	1'x4'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	4410	126 lm/W				
			5000K	4445	127 lm/W				
		30W	3500K	3840	128 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		24W	3500K	3144	131 lm/W				
			4000K	3168	132 lm/W				
			5000K	3192	133 lm/W				
KT-RKIT24PS-22DB-8CSA-VDIM	2'x2'	24W	3500K	3000	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	3024	126 lm/W				
			5000K	3048	127 lm/W				
		18W	3500K	2358	131 lm/W				
			4000K	2376	132 lm/W				
			5000K	2394	133 lm/W				
		15W	3500K	2010	134 lm/W				
			4000K	2025	135 lm/W				
			5000K	2040	136 lm/W				
KT-RKIT35PS-22DB-8CSA-VDIM	2'x2'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80
			4000K	4410	126 lm/W				
			5000K	4445	127 lm/W				
		30W	3500K	3840	128 lm/W				
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		24W	3500K	3144	131 lm/W				
			4000K	3168	132 lm/W				
			5000K	3192	133 lm/W				
KT-RKIT30PS-24DB-8CSA-VDIM	2'x4'	30W	3500K	3840	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	3870	129 lm/W				
			5000K	3900	130 lm/W				
		25W	3500K	3350	134 lm/W				
			4000K	3375	135 lm/W				
			5000K	3400	136 lm/W				
		20W	3500K	2740	137 lm/W				
			4000K	2760	138 lm/W				
			5000K	2780	139 lm/W				

Center Basket Troffer Retrofit Kit





FUTURE FIT


Power and Color Select

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT45PS-24DB-8CSA-VDIM	2'x4'	45W	3500K	5760	128 lm/W	120-277V	0-10V	Yes	>80
			4000K	5805	129 lm/W				
			5000K	5850	130 lm/W				
		38W	3500K	4978	131 lm/W				
			4000K	5016	132 lm/W				
			5000K	5054	133 lm/W				
		30W	3500K	4110	137 lm/W				
			4000K	4140	138 lm/W				
			5000K	4170	139 lm/W				

Sensors

catalog number	DESCRIPTION	
KTSL-FC2-12V-SM-PIR	Bluetooth wireless integrated fixture controller	

Back-Lit Panel



SMART LOOP

Power and Color Select | SmartLoop Embedded | FC2

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-BPLED40PS-22B-8CSA-VDIM /FC2	2'x2'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4500	113 lm/W				
			5000K	4450	111 lm/W				
		30W	3500K	3400	111 lm/W				
			4000K	3500	117 lm/W				
			5000K	3450	115 lm/W				
		20W	3500K	2400	111 lm/W				
			4000K	2500	125 lm/W				
			5000K	2450	123 lm/W				
KT-BPLED50PS-24B-8CSA-VDIM /FC2	2'x4'	50W	3500K	5850	117 lm/W	120-277V	0-10V	Yes	>80
			4000K	6200	124 lm/W				
			5000K	5900	118 lm/W				
		40W	3500K	4850	121 lm/W				
			4000K	5200	120 lm/W				
			5000K	4900	123 lm/W				
		20W	3500K	3850	128 lm/W				
			4000K	4200	140 lm/W				
			5000K	3900	130 lm/W				

Power and Color Select

XFIT

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-BPLED40PS-14-8CSA-VDIM /G2	1'x4'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4600	115 lm/W				
			5000K	4450	111 lm/W				
		30W	3500K	3400	113 lm/W				
			4000K	3600	120 lm/W				
			5000K	3450	115 lm/W				
		20W	3500K	2400	120 lm/W				
			4000K	2600	130 lm/W				
			5000K	2450	123 lm/W				
KT-BPLED40PS-22-8CSA-VDIM /G2	2'x2'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4500	113 lm/W				
			5000K	4450	111 lm/W				
		30W	3500K	3400	113 lm/W				
			4000K	3500	117 lm/W				
			5000K	3450	115 lm/W				
		20W	3500K	2400	120 lm/W				
			4000K	2500	125 lm/W				
			5000K	2450	123 lm/W				
KT-BPLED50PS-24-8CSA-VDIM /G2	2'x4'	50W	3500K	5850	117 lm/W	120-277V	0-10V	Yes	>80
			4000K	6200	124 lm/W				
			5000K	5900	118 lm/W				
		40W	3500K	4850	121 lm/W				
			4000K	5200	130 lm/W				
			5000K	4900	123 lm/W				
		30W	3500K	3850	128 lm/W				
			4000K	4200	140 lm/W				
			5000K	3900	130 lm/W				

Dedicated

XFIT

Catalog Number	Nominal Size	Selectable Wattage	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI	Available CCT
KT-BPLED40-14-8xx-VDIM	1'x4'	40W	4400	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-22-8xx-VDIM	2'x2'	30W	3300	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-22-8xx-VDIM	2'x2'	40W	4400	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-24-8xx-VDIM	2'x4'	40W	4400	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED50-24-8xx-VDIM	2'x4'	50W	5500	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K

Back-Lit Panel

Premium (Gen 1)



Catalog Number	Nominal Size	Wattage	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI	Available CCTs
KT-BPLED30-14-8xx-VDIM-P	1'x4'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED20-22-8xx-VDIM-P	2'x2'	20W	2500	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-22-8xx-VDIM-P	2'x2'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-24-8xx-VDIM-P	2'x4'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-24-8xx-VDIM-P	2'x4'	40W	5000	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K

To order, simply replace the "xx" with the first two numbers from the corresponding color temperature.


Premium (Gen 2)




Catalog Number	Nominal Size	Wattage	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI	Available CCTs
KT-BPLED30-14-8xx-VDIM-P /G2	1'x4'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED20-22-8xx-VDIM-P /G2	2'x2'	20W	2500	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-22-8xx-VDIM-P /G2	2'x2'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-24-8xx-VDIM-P /G2	2'x4'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-24-8xx-VDIM-P /G2	2'x4'	40W	5000	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K

To order, simply replace the "xx" with the first two numbers from the corresponding color temperature.

Mounts and Brackets for Power & Color Select, Dedicated and Premium (Gen 2)

Catalog Number	Description	
KT-BPLED-JBOX-1	Expansion junction box optimized for Dedicated and Power/Color Select back-lit LED panels	

Mounts and Brackets for Premium (Gen 1)

Catalog Number	Description	
KT-BPLED-JBOX-2	Expansion junction box optimized for Premium back-lit LED panels	


Back-Lit Panel

Mounts and Brackets



Catalog Number	Description	
KT-BPLED-CABLE-KIT	Cable hanging kit for LED back-lit panel lights, includes 2 cable sets	
KT-BPLED-SM-14-KIT /G2	Surface mount kit for 1'x4' LED back-lit panel lights, white finish	
KT-BPLED-SM-22-KIT /G2	Surface mount kit for 2'x2' LED back-lit panel lights, white finish	
KT-BPLED-SM-24-KIT /G2	Surface mount kit for 2'x4' LED back-lit panel lights, white finish	
KT-BPLED-EM-14-KIT	Emergency LED backup mounting kit for 1'x4' LED back-lit panel lights	
KT-BPLED-EM-22/4-KIT	Emergency LED backup mounting kit for 2'x2' and 2'x4' back-lit panel lights	

Sensors

Catalog Number	Description	
KTSL-FC1-UV-KO-PIR	Bluetooth mesh wireless fixture controller for SmartLoop system with remote mountable daylight and PIR motion sensor	

Back-Lit Panel

Power and Color Select | Contractor Prime



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-BPLED35PS-14C-8CSA-VDIM	1'x4'	35	3500K	3950	113	120-277V	0-10V	Yes	>80
			4000K	4200	120				
			5000K	4000	114				
		30	3500K	3450	115				
			4000K	3700	123				
			5000K	3500	117				
		20	3500K	2400	120				
			4000K	2600	130				
			5000K	2450	123				
KT-BPLED35PS-22C-8CSA-VDIM	2'x2'	35	3500K	3950	113	120-277V	0-10V	Yes	>80
			4000K	4200	120				
			5000K	4000	114				
		30	3500K	3450	115				
			4000K	3700	123				
			5000K	3500	117				
		20	3500K	2400	120				
			4000K	2600	130				
			5000K	2450	123				
KT-BPLED45PS-24C-8CSA-VDIM	2'x4'	45	3500K	5300	118	120-277V	0-10V	Yes	>80
			4000K	5650	125				
			5000K	5350	118				
		35	3500K	4200	120				
			4000K	4550	130				
			5000K	4235	121				
		30	3500K	3850	128				
			4000K	4200	140				
			5000K	3900	130				

Mounts and Brackets


Catalog Number	Description	
KT-BPLED-CABLE-KIT	Cable hanging kit for LED back-lit panel lights, includes 2 cable sets	
KT-BPLED-SM-14-KIT /G2	Surface mount kit for 1'x4' LED back-lit panel lights, white finish	
KT-BPLED-SM-22-KIT /G2	Surface mount kit for 2'x2' LED back-lit panel lights, white finish	
KT-BPLED-SM-24-KIT /G2	Surface mount kit for 2'x4' LED back-lit panel lights, white finish	
KT-BPLED-EM-14C-KIT	Emergency LED backup mounting kit for 1'x4' LED back-lit panel lights	
KT-BPLED-EM-22/4C-KIT	Emergency LED backup mounting kit for 2'x2' and 2'x4' back-lit panel lights	

Sensors

Catalog Number	Description	
KTSL-FC1-UV-K0-PIR	Bluetooth mesh wireless fixture controller for SmartLoop system with remote mountable daylight and PIR motion sensor	

Back-Lit Panel

Power and Color Select | Integrated EMRG

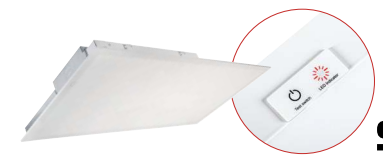

SMART//SAFE

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Emergency Output	Input Voltage	Dimmable	DLC	CRI
KT-BPLED35PS-22C-8CSA-VDIM /EM8	2'x2'	35	3500K	3950	113 lm/W	8W - 800 lumen	120-277V	0-10V	Yes	>80
			4000K	4200	120 lm/W					
			5000K	4000	114 lm/W					
		30	3500K	3450	115 lm/W					
			4000K	3700	123 lm/W					
			5000K	3500	117 lm/W					
		20	3500K	2400	120 lm/W					
			4000K	2600	130 lm/W					
			5000K	2450	123 lm/W					
KT-BPLED45PS-24C-8CSA-VDIM /EM8	2'x4'	45	3500K	5300	118 lm/W	8W - 800 lumen	120-277V	0-10V	Yes	>80
			4000K	5650	125 lm/W					
			5000K	5350	118 lm/W					
		35	3500K	4200	120 lm/W					
			4000K	4550	130 lm/W					
			5000K	4235	121 lm/W					
		30	3500K	3850	128 lm/W					
			4000K	4200	140 lm/W					
			5000K	3900	130 lm/W					

Mounts and Brackets

Catalog Number	Description	
KT-BPLED-CABLE-KIT	Cable hanging kit for LED back-lit panel lights, includes 2 cable sets	
KT-BPLED-SM-22-KIT /G2	Surface mount kit for 2'x2' LED back-lit panel lights, white finish	
KT-BPLED-SM-24-KIT /G2	Surface mount kit for 2'x4' LED back-lit panel lights, white finish	

Sensors

Catalog Number	Description	
KTSL-FC1-UV-K0-PIR	Bluetooth mesh wireless fixture controller for SmartLoop system with remote mountable daylight and PIR motion sensor	

Back-Lit Panel Retrofit Kit

Power and Color Select | SmartLoop Embedded (Gen 2) | FC5



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14PD-8CSA-VDIM /G2/FC5	1'x4'	35W	3500K	3780	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	3850	113 lm/W				
			5000K	3850	113 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3360	113 lm/W				
			5000K	3360	113 lm/W				
		20W	3500K	2200	110 lm/W				
			4000K	2260	113 lm/W				
			5000K	2260	113 lm/W				
KT-RKIT35PS-22PD-8CSA-VDIM /G2/FC5	2'x2'	40W	3500K	3780	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	3850	113 lm/W				
			5000K	3850	113 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3360	113 lm/W				
			5000K	3360	113 lm/W				
		20W	3500K	2200	110 lm/W				
			4000K	2260	113 lm/W				
			5000K	2260	113 lm/W				
KT-RKIT45PS-24PD-8CSA-VDIM /G2/FC5	2'x4'	50W	3500K	4860	108 lm/W	120-277V	0-10V	Yes	>80
			4000K	4950	110 lm/W				
			5000K	4950	110 lm/W				
		40W	3500K	3850	110 lm/W				
			4000K	3920	112 lm/W				
			5000K	3920	112 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3390	113 lm/W				
			5000K	3390	113 lm/W				

Back-Lit Panel Retrofit Kit

Power and Color Select (Gen 2)



Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT35PS-14PD-8CSA-VDIM /G2	1'x4'	35W	3500K	3780	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	3850	113 lm/W				
			5000K	3850	113 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3360	113 lm/W				
			5000K	3360	113 lm/W				
		20W	3500K	2200	110 lm/W				
			4000K	2260	113 lm/W				
			5000K	2260	113 lm/W				
KT-RKIT35PS-22PD-8CSA-VDIM /G2	2'x2'	35W	3500K	3780	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	3850	113 lm/W				
			5000K	3850	113 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3360	113 lm/W				
			5000K	3360	113 lm/W				
		20W	3500K	2200	110 lm/W				
			4000K	2260	113 lm/W				
			5000K	2260	113 lm/W				
KT-RKIT45PS-24PD-8CSA-VDIM /G2	2'x4'	45W	3500K	4860	108 lm/W	120-277V	0-10V	Yes	>80
			4000K	4950	110 lm/W				
			5000K	4950	110 lm/W				
		35W	3500K	3850	110 lm/W				
			4000K	3920	112 lm/W				
			5000K	3920	112 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3390	113 lm/W				
			5000K	3390	113 lm/W				

Back-Lit Panel Retrofit Kit

Power and Color Select (Gen 1)



FUTURE FIT

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	DLC	CRI
KT-RKIT40PS-14PD-8CSA-VDIM	1'x4'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4500	113 lm/W				
			5000K	4500	113 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3400	113 lm/W				
			5000K	3400	113 lm/W				
	20W	3500K	2200	110 lm/W					
		4000K	2250	113 lm/W					
		5000K	2250	113 lm/W					
KT-RKIT40PS-22PD-8CSA-VDIM	2'x2'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4500	113 lm/W				
			5000K	4500	113 lm/W				
		30W	3500K	3300	110 lm/W				
			4000K	3400	113 lm/W				
			5000K	3400	113 lm/W				
	20W	3500K	2200	110 lm/W					
		4000K	2250	113 lm/W					
		5000K	2250	113 lm/W					
KT-RKIT50PS-24PD-8CSA-VDIM	2'x4'	50W	3500K	5500	123 lm/W	120-277V	0-10V	Yes	>80
			4000K	5600	125 lm/W				
			5000K	5600	124 lm/W				
		40W	3500K	4400	110 lm/W				
			4000K	4500	113 lm/W				
			5000K	4500	113 lm/W				
	30W	3500K	3300	110 lm/W					
		4000K	3400	113 lm/W					
		5000K	3400	113 lm/W					




Self-Service Lighting Layout Tool

Keystone now offers an online self-service tool to help you take the next step in bringing your project to life.

Our easy-to-use application instantly renders lighting layouts for simple space types. Simply add room size and select your fixture, and the application helps determine how many fixtures you need and what types of lamps are best for your applications to save the maximum amount of energy, all within budget.

As always, we continue to offer our complimentary lighting layout services and are happy to consult and assist whenever needed.

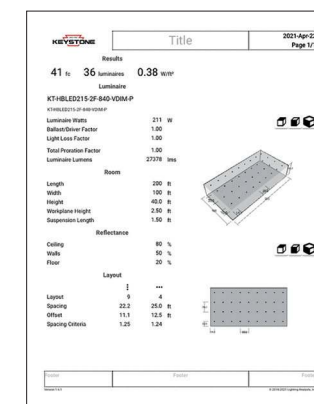

Visit: keystonetech.com/lighting-layout

The Keystone Difference

Our mission at Keystone is to change the way you think about lighting. We believe that lighting should be simple, hassle-free, and enjoyable. Keystone is Light Made Easy®.



**Fast
Quotes**



**Quick
Delivery**



**Trusted Brand
Since 1945**



**Free Lighting
Layouts**



**No Questions Asked
Return Policy**



**Free
Samples**

LIT-BR-TROFFER FIX



LAMPS | FIXTURES | POWER SUPPLIES | CONTROLS

Keystone Technologies Philadelphia, PA 800.464.2680 keystonetech.com