

SINCE 1945

KEYSTONE

LIGHT MADE EASY®

POWER SELECT CONSTANT CURRENT DRIVERS




Simple Versatility



Flexibility shouldn't come with extra complexity.

Keystone's latest generation of Power Select Constant Current Drivers combines four output current settings, broad fixture compatibility, and compact metal-case construction to give manufacturers more options while reducing the need for multiple driver SKUs. It's a smarter way to cover more applications with fewer products.




4 selectable output currents

One driver adapts to a wider range of fixtures and applications



0-10V dimming

Smooth dimming from 100% to 5%, with dim-to-off



Compact metal housing

Durable construction and compact size for easier fixture integration



Reduced inventory complexity

Fewer SKUs help simplify purchasing, stocking, and manufacturing

A Wattage and Size to Meet Your Needs

15W, 25W, 35W, 45W, 75W, 100W models

15W & 25W Case Style LS3

35W & 45W Case Style LS4

75W & 100W Case Style LS5



LEARN MORE



Shown actual size

15W & 25W Models

CATALOG NUMBER	MAX. OUTPUT POWER	INPUT VOLTAGE	SELECTABLE OUTPUT CURRENT (4 SETTINGS)	OUTPUT VOLTAGE
KTLD-15-UV-PS300-54-VDIM-LS3	15W	120-277V	150mA / 200mA / 250mA / 300mA	30-54Vdc
KTLD-15-UV-PS350-42-VDIM-LS3	15W	120-277V	200mA / 250mA / 300mA / 350mA	20-42Vdc
KTLD-25-UV-PS450-54-VDIM-LS3	25W	120-277V	300mA / 350mA / 400mA / 450mA	30-54Vdc
KTLD-25-UV-PS600-42-VDIM-LS3	25W	120-277V	450mA / 500mA / 550mA / 600mA	20-42Vdc

Length	5.00"	
Width	1.30"	
Height	0.95"	

Case Style LS3

35W & 45W Models

CATALOG NUMBER	MAX. OUTPUT POWER	INPUT VOLTAGE	SELECTABLE OUTPUT CURRENT (4 SETTINGS)	OUTPUT VOLTAGE
KTLD-35-UV-PS650-54-VDIM-LS4	35W	120-277V	500mA / 550mA / 600mA / 650mA	30-54Vdc
KTLD-35-UV-PS850-42-VDIM-LS4	35W	120-277V	700mA / 750mA / 800mA / 850mA	20-42Vdc
KTLD-45-UV-PS850-54-VDIM-LS4	45W	120-277V	700mA / 750mA / 800mA / 850mA	30-54Vdc
KTLD-45-UV-PS1100-42-VDIM-LS4	45W	120-277V	900mA / 950mA / 1000mA / 1100mA	20-42Vdc


Length	5.95"	
Width	1.30"	
Height	1.09"	

Case Style LS4

75W & 100W Models

CATALOG NUMBER	MAX. OUTPUT POWER	INPUT VOLTAGE	SELECTABLE OUTPUT CURRENT (4 SETTINGS)	OUTPUT VOLTAGE
KTLD-75-UV-PS1400-54-VDIM-LS5	75W	120-277V	1100mA / 1200mA / 1300mA / 1400mA	30-54Vdc
KTLD-75-UV-PS1700-42-VDIM-LS5	75W	120-277V	1400mA / 1500mA / 1600mA / 1700mA	20-42Vdc
KTLD-100-UV-PS1800-54-VDIM-LS5	96W	120-277V	1500mA / 1600mA / 1700mA / 1800mA	30-54Vdc
KTLD-100-UV-PS2300-42-VDIM-LS5	96W	120-277V	2000mA / 2100mA / 2200mA / 2300mA	20-42Vdc

Length	9.55"			
			Width	1.31"
			Height	1.11"
Case Style LS5				

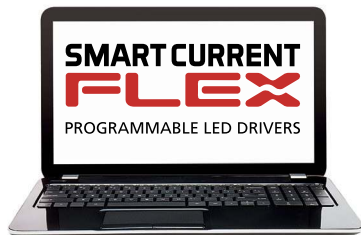

From Selectable to Fully Programmable

Explore Keystone's SmartCurrent FLEX family of programmable LED drivers for precise control and application-specific performance.



For more, scan the QR code