




KT-LED35A25-O-EX39-8XX-DIM / G2

300W REPLACEMENT LAMP

DESCRIPTION

36W Commercial A25/PS30 Lamp | 3000–5000K | > 80 CRI | Omnidirectional

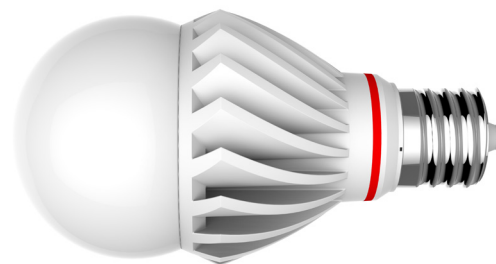

LAMP TYPE: A25/PS30

BASE TYPE: EX39 (Mogul)

WATTAGE: 35W

COLOR TEMPERATURE: 3000–5000K

COLOR RENDERING INDEX (CRI): > 80

WARRANTY: 5 Years

PRODUCT FEATURES

- Up to 75% energy saving compared to legacy equivalent lamps
- Can be used in base-up, base-down, or base-horizontal position
- Large metal heatsink for optimal heat dissipation
- THD < 20%
- PF > 0.90
- Operating temperature range –4°F/–20°C to 113°F/45°C; 95°F/35°C max for fully enclosed fixture
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for dry and damp location
- Rated for open and enclosed fixtures
- Meets UL 1993 and 1598C standards

ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Lamp Wattage	Color Temp	Lumens	Efficacy	Input Voltage	Legacy Equivalent Wattage	Base Type	Dimmable*	Light Distribution	CRI
KT-LED35A25-O-EX39-830-DIM / G2	36W	3000K	5000	139 lm/W	120-277V	300W incand./ 150W HID	EX39	yes	330°	>80
KT-LED35A25-O-EX39-840-DIM / G2	36W	4000K	5000	139 lm/W	120-277V	300W incand./ 150W HID	EX39	yes	330°	>80
KT-LED35A25-O-EX39-850-DIM / G2	36W	5000K	5000	139 lm/W	120-277V	300W incand./ 150W HID	EX39	yes	330°	>80

*Note: Lamp is TRIAC dimmable only at 120v.




KT-LED35A25-O-EX39-8XX-DIM /G2

300W REPLACEMENT LAMP

OPERATING SPECIFICATIONS

POLAR CANDELA DISTRIBUTION

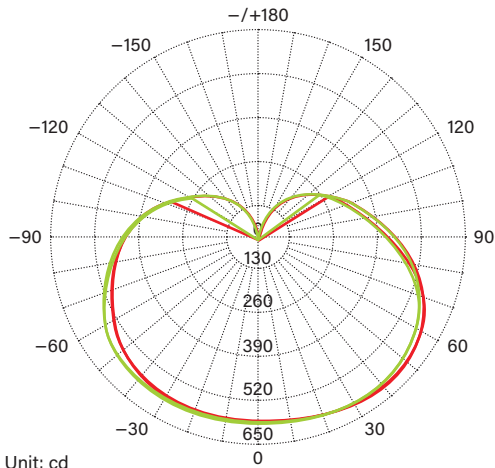


Unit: cd

— C0 / 180,235.7

— C90 / 270,245.4


SPECTRAL DISTRIBUTION

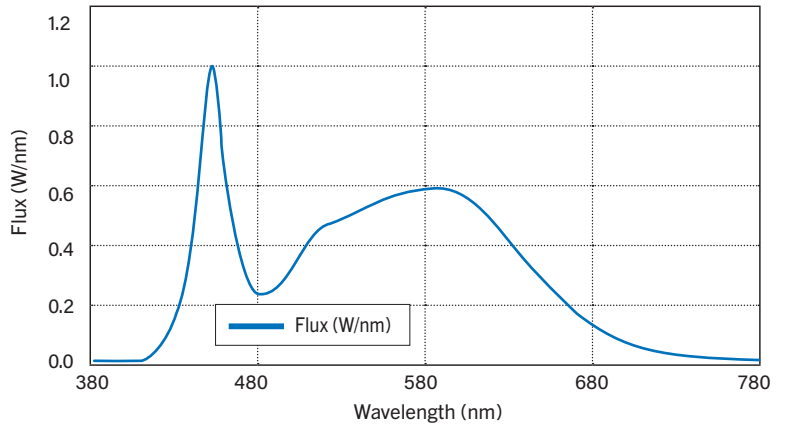

RATED LIFE

L70 (Hours)	50,000
-------------	--------

PHYSICAL SPECIFICATIONS

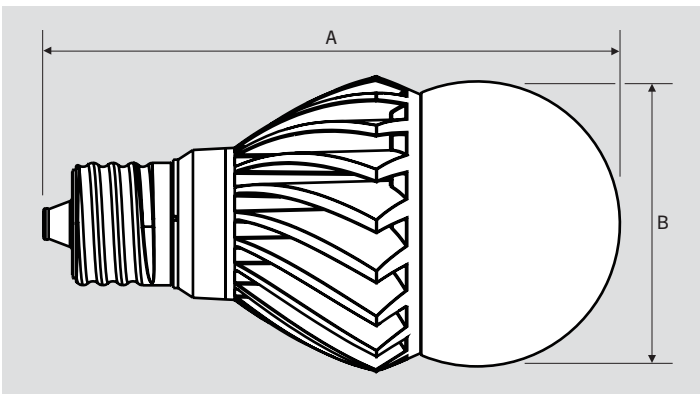

LAMP DIMENSIONS

A (Length)	7.28"
B (Diameter)	3.74"

BASE TYPE: E26 (Medium) or EX39 (Mogul)

PACKAGING

Carton Quantity	12 pcs
Carton Dimensions	16.22" x 12.17" x 7.95"
Carton Weight	17 lbs



KT-LED35A25-O-EX39-8XX-DIM /G2

300W REPLACEMENT LAMP

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	EASY CODE	DLC PRODUCT ID
KT-LED35A25-O-EX39-830-DIM /G2	6 pcs	843654149592	GUT-37	S-QZS2UW
KT-LED35A25-O-EX39-840-DIM /G2	6 pcs	843654149608	EAP-94	S-KJP3XC
KT-LED35A25-O-EX39-850-DIM /G2	6 pcs	843654149615	LNC-37	S-BJN78U

CATALOG NUMBER BREAKDOWN

KT-LED35A25-O-EX39-8XX-DIM /G2

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

- 1 Keystone Technologies**
- 2 LED Lamp**
- 3 Wattage**
- 4 Lamp Style**
- 5 Omnidirectional**
- 6 Base Type**
- 7 80 CRI**
- 8 CCT**
- 9 Dimming**
- 10 Second Generation**