

# W-LED-4-44PS-8CSA



## 4FT LED WRAP FIXTURE, 120-277V INPUT, FROSTED LENS, 0-10V DIMMING

### PRODUCT FEATURES

- CCT Selectable (3500/4000/5000K)
- Wattage Selectable (44/28/18W)
- Powered by 0 –10V dimming LED driver with 12V Aux
- Luminaire is suitable for installation within a clothes closet storage space
- Compatible with emergency backups
- LED lifetime: L70 >100,000 hours @ 25°C fixture ambient
- Low optical flicker
- THD: < 20%
- Power factor > 0.95




**10 YEAR**  
LIMITED WARRANTY

### PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	Efficacy	CRI	Power Factor	Lifetime
W-LED-4-44PS-8CSA	120-277V	44W	3500K	5,852	133 lm/W	> 80	> 0.90	50,000hrs
			4000K	5,896	134 lm/W			
			5000K	5,940	135 lm/W			
		28W	3500K	3,948	141 lm/W			
			4000K	3,976	142 lm/W			
			5000K	4,004	143 lm/W			
		18W	3500K	2,664	148 lm/W			
			4000K	2,682	149 lm/W			
			5000K	2,700	150 lm/W			

**PHOTOMETRIC SPECIFICATIONS**

**POLAR CANDELA DISTRIBUTION**

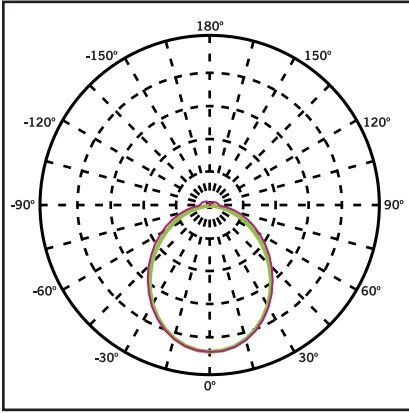


Maximum Candela = 2155.8  
 Located at Horizontal Angle = 0,  
 Vertical Angle 0

- 1. **Violet** Vertical Plane through Horizontal Angles (90-270)
- 2. **Green** Vertical Plane through Horizontal Angles (0-180)


**Beam Angle: 220°**

**Visible Light Area: 325°**

**RELATIVE SPECTRAL POWER DISTRIBUTION**

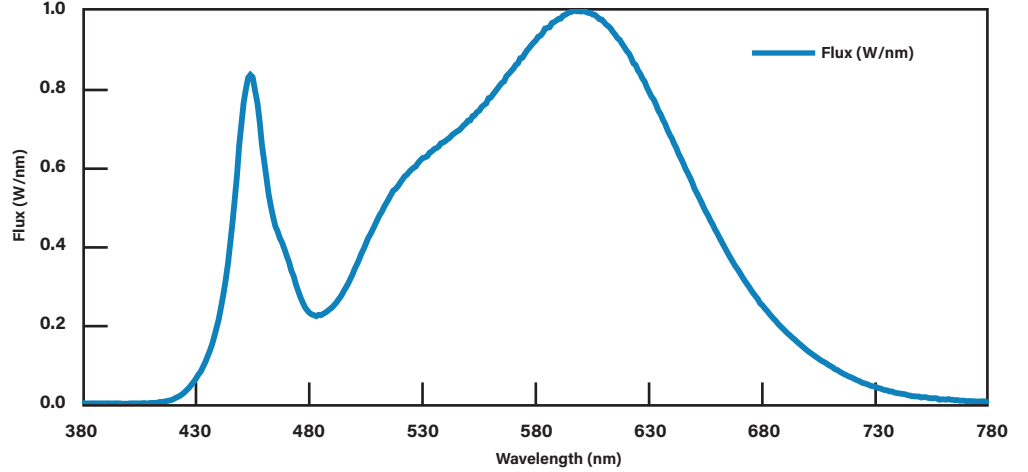

**PHYSICAL SPECIFICATIONS**

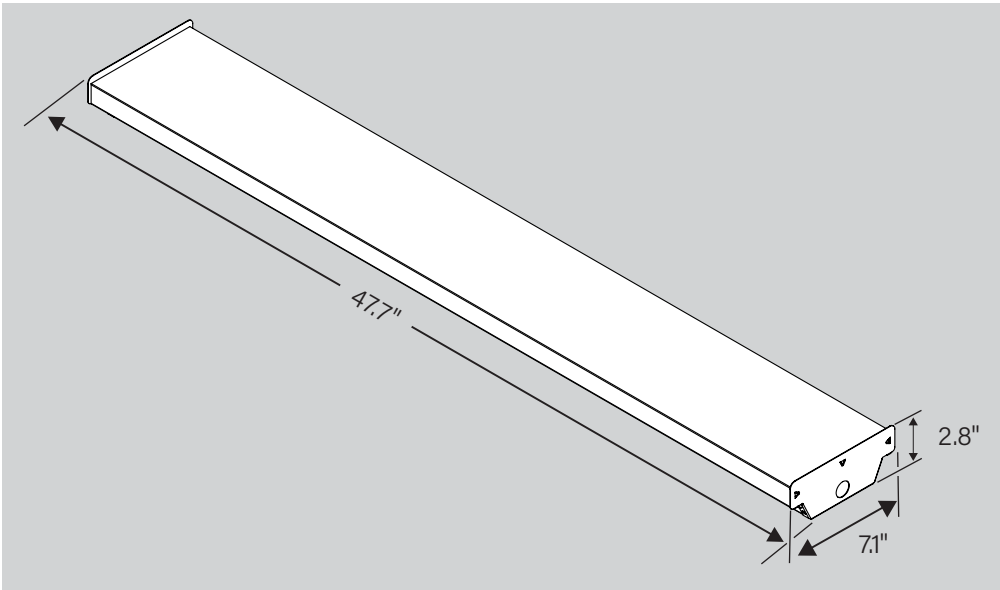

**ORDERING INFORMATION**

Order Code	Pack Quantity	UPC	Easy Code
W-LED-4-44PS-8CSA	1	843654137391	PKX-68