





## KT-BPLED40-24-8XX-VDIM-P /G2

BACKLIT LED PANEL LIGHT

#### **DESCRIPTION**

2' × 4' Backlit LED Panel Light | 40W | 120-277V Input | 0-10V Dimming











#### **PRODUCT FEATURES**

- · Aluminum frame featuring stepped-edge design detail and gloss · Suitable for damp locations white paint for improved aesthetics
- Backlit style design; fits standard T-grid ceilings
- Suitable for recessed- or surface-mount (with optional accessories)\*
- LED, offering optimal light diffusion and consistent surface illumination, with no risk of yellowing over product lifetime
- \* For use in non-fire rated installations only


- Powered by Keystone 0-10V dimmable LED driver with built-in junction box
- Compatible with Keystone SmartSafe LED emergency backup
- Over 50% energy savings compared to traditional fluorescent troffers
- Construction features precise optical lenses over each individual
   Operating temperature range: -20°C/-4°F to 40°C/104°F
  - Available with Keystone's Smart Loop Bluetooth™ mesh wireless system, with features such as high-end trim, grouping, occupancy/ vacancy sensing, and scheduling.

#### PERFORMANCE SPECIFICATIONS

| Catalog Number               | Input Voltage | Wattage | <b>Color Temperature</b> | Lumen Output | Efficacy | CRI | Power Factor | UGR  | Lifetime     |
|------------------------------|---------------|---------|--------------------------|--------------|----------|-----|--------------|------|--------------|
| KT-BPLED40-24-835-VDIM-P /G2 | 120-277V      | 40W     | 3500K                    | 4400         | 110 lm/W | >80 | >0.9         | < 19 | 50,000 Hours |
| KT-BPLED40-24-840-VDIM-P /G2 | 120-277V      | 40W     | 4000K                    | 4400         | 110 lm/W | >80 | >0.9         | < 19 | 50,000 Hours |
| KT-BPLED40-24-850-VDIM-P /G2 | 120-277V      | 40W     | 5000K                    | 4400         | 110 lm/W | >80 | >0.9         | < 19 | 50,000 Hours |


#### PHOTOMETRIC SPECIFICATIONS





- - Point of Max Cd: 1,461.4

### **POLAR CANDELA PLOT**



#### ZONAL LUMEN SUMMARY

| Zone  | Lumens  | % Luminaire |
|-------|---------|-------------|
| 0-30  | 1,140.8 | 26.5%       |
| 0-40  | 1,875.0 | 43.6%       |
| 0-60  | 3,339.8 | 77.6%       |
| 60-90 | 958.3   | 22.3%       |
| 0-90  | 4301.5  | 100%        |








## KT-BPLED40-24-8XX-VDIM-P /G2

BACKLIT LED PANEL LIGHT


#### PHYSICAL SPECIFICATIONS

#### WEIGHT INFORMATION

| 1 Piece    | 1 Carton   |
|------------|------------|
| 11.50 lbs. | 23.00 lbs. |

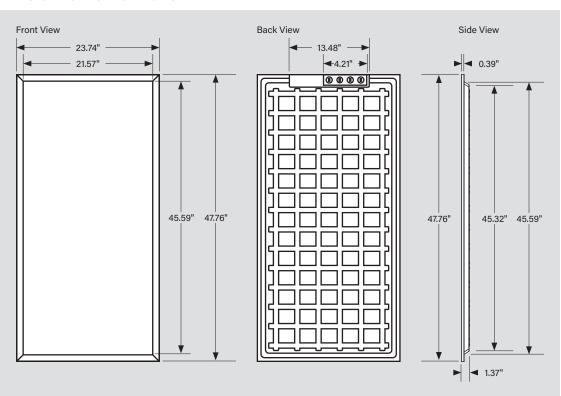

#### **EXPLODED VIEW CONSTRUCTION FEATURES**

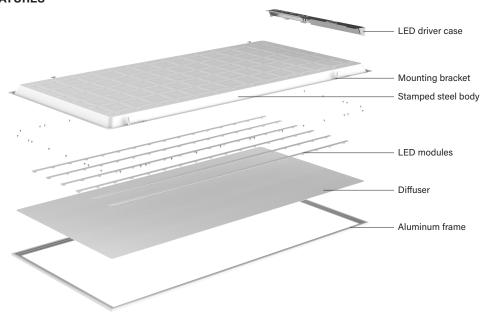







## KT-BPLED40-24-8XX-VDIM-P/G2

BACKLIT LED PANEL LIGHT

#### **ACCESSORIES**

#### **SENSORS**

| Fa | Factory-Installable OR Field-Installable (field-installable purchased separately) |   |  |   |                      |           |  |  |
|----|---|---|--|---|----------------------|-----------|--|--|
|    | SUFFIX*   | CATALOG NUMBER                          | DESCRIPTION  |   | UPC                  | EASY CODE |  |  |
|    | /FC1-PIR  | KTSL-FC1-UV-KO-PIR                      | Bluetooth mesh wireless fixture controller for SmartLoop<br>with remote mount PIR motion sensor with daylight harve<br>and high-end trim; 120–277V; 3A max load with 0–10V dir | esting  LOP   | 843654129259         | MGZ-59    |  |  |
|    |   | art Loop PIR Sensor<br>SL-FC1-UV-KO-PIR |  | Note: Keystone Smartt<br>Lighting Control solutic<br>such as complete wiich<br>trim, occupancy/vacan<br>scheduling. To learn m<br>visit http://www.keysto | ess control, zonina. | hiah-end  |  |  |

<sup>\*</sup> For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

|  | Field-Installable / Field-Use ONLY (purchased separately) |   |  |  |              |           |
|--|---|---|--|--|--------------|-----------|
|  |   | CATALOG NUMBER                            | DESCRIPTION  |  | UPC          | EASY CODE |
|  |   | KTSL-WS1-B-SG /G2                         | Bluetooth mesh wireless battery powered wall switch for SmartLoop system |  | 843654141695 | FYH-31    |
|  |   |   |  |  |              |           |
|  | Auto  | 100                                       |  |  |              |           |
|  |   | Auto                                      |  |  |              |           |
|  |   | © Some                                    |  |  |              |           |
|  |   |   |  |  |              |           |
| Bluetooth Wireless Keypad<br>KTSL-WS1-B-SG /G2 |   | tooth Wireless Keypad<br>TSL-WS1-B-SG /G2 |  |  |              |           |

(Accessories continued on next page)







# KT-BPLED40-24-8XX-VDIM-P/G2

BACKLIT LED PANEL LIGHT

#### **ACCESSORIES** (continued)

#### **CORD SETS**

#### Factory-Installable OR Field-Installable (field-installable purchased separately)

| $\checkmark$ | SUFFIX*   | CATALOG NUMBER      | DESCRIPTION   | UPC          | EASY CODE |
|--------------|-----------|---------------------|---|--------------|-----------|
|              | /515P-6   | KT-CS-515P-6-18/3   | Cord set for high bay; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire  | 843654140124 | UKH-26    |
|              | /L715P-10 | KT-CS-L715P-10-16/3 | Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 10' SJTOW cable; 16/3 wire   | 843654140131 | SFV-88    |
|              | /L615P-10 | KT-CS-L615P-10-16/3 | Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 10' SJTOW cable; 16/3 wire   | 843654140148 | ZQS-05    |
|              | /L515P-10 | KT-CS-L515P-10-16/3 | Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 10' SJTOW cable; 16/3 wire   | 843654140155 | GVH-22    |
|              | /L715P-6  | KT-CS-L715P-6-16/3  | Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 6' SJTOW cable; 16/3 wire  | 843654140162 | DVU-44    |
|              | /L615P-6  | KT-CS-L615P-6-16/3  | Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 6' SJTOW cable; 16/3 wire  | 843654140179 | LCW-66    |
|              | /L515P-6  | KT-CS-L515P-6-16/3  | Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 6' SJTOW cable; 16/3 wire  | 843654140186 | POC-82    |
|              | /MC-6-3   | KT-MC-NP-6-18/3     | MC cable whip for high bays; no plug; inners 1/2" strip on both ends; 6' metal-clad cable; 18/3 wire                          | 843654134505 | EYP-82    |
|              | /MC-6-5   | KT-MC-NP-6-18/5     | MC cable whip for high bays; no plug; inners 1/2" strip on both ends; 6' metal-clad cable; 18/5 wire (dimming wires included) | 843654134512 | CBU-56    |
|              | /NP-10    | KT-CS-NP-10-16/3    | Cord for high bays; no plug; inners 1/2" strip on both ends; 10' SJTOW cable; 16/3 wire                                       | 843654140193 | YOH-90    |
|              | /NP-6     | KT-CS-NP-6-16/3     | Cord for high bays; no plug; inners 1/2" strip on both ends; 6' SJTOW cable; 16/3 wire  | 843654140216 | HUB-73    |
|              | /NP-15    | KT-CS-NP-15-16/3    | Cord for high bays; no plug; inners 1/2" strip on both ends; 15' SJTOW cable; 16/3 wire                                       | 843654140209 | EYD-18    |



<sup>\*</sup> For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet). **Note:** For cord sets not listed here, please contact your Keystone sales rep.

(Accessories continued on next page)







### KT-BPLED40-24-8XX-VDIM-P /G2 BACKLIT LED PANEL LIGHT

#### **ACCESSORIES** (continued)

5W, 500 lumen Battery Backup KT-EMRG-LED-5C-500-EN /DF

#### **EMERGENCY BACKUP**

Factory-Installable OR Field-Installable (field-installable purchased separately)

|              | , , , , , , , , , , |  |   |              |           |  |
|--------------|---------------------|--|---|--------------|-----------|--|
| $\checkmark$ | SUFFIX*             | CATALOG NUMBER   | DESCRIPTION   | UPC          | EASY CODE |  |
|              | /EM5 <sup>†</sup>   | KT-EMRG-LED-5C-500-EN /DF  | 5W, 500 lumen Smart Safe emergency backup with dual flex cables   | 843654132433 | RAR-74    |  |
|              | /EM12 <sup>†</sup>  | KT-EMRG-LED-12C-1200-EN /DF  | 12W, 1200 lumen Smart Safe emergency backup with dual flex cables | 890949019900 | YCV-23    |  |
|              |                     | Construction of the Constr |   |              |           |  |

<sup>\*</sup> For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
† Factory installation of emergency backup units will automatically include any relevant mounting bracket.

12W, 1200 lumen Battery Backup KT-EMRG-LED-12C-1200-EN /DF

#### Field-Installable / Field-Use ONLY (purchased separately)

| CATALOG NUMBER       | DESCRIPTION   | UPC          | EASY CODE |
|----------------------|---|--------------|-----------|
| KT-BPLED-EM-22/4-KIT | Emergency LED backup mounting bracket kit for LED high bay fixtures | 843654128047 | EIG-03    |



(Accessories continued on next page)







## KT-BPLED40-24-8XX-VDIM-P/G2 BACKLIT LED PANEL LIGHT

#### **ACCESSORIES** (continued)

#### **MOUNTS AND BRACKETS**

Factory-Installable OR Field-Installable (field-installable purchased separately)



<sup>\*</sup> For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

#### Field-Installable / Field-Use ONLY (purchased separately)

| CATALOG NUMBER         | DESCRIPTION  | UPC          | EASY CODE |
|------------------------|--|--------------|-----------|
| KT-BPLED-SM-24-KIT /G2 | Surface Mount kit for 2 × 4 backlit panels           | 843654134543 | CGY-52    |
| KT-BPLED-CABLE-KIT     | Aircraft cable hanging kit for LED high bay fixtures | 843654133423 | JLB-77    |
|                        |  |              |           |





#### **STEP-DOWN TRANSFORMERS**

#### Factory-Installable OR Field-Installable (field-installable purchased separately)



<sup>\*</sup> For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
† Factory installation of step-down transformer units will automatically include any relevant mounting bracket.
† Step-down transformers cannot be ordered in conjunction with standard SJTOW cord set options (contact Keystone sales rep for available custom options if needed).







## KT-BPLED40-24-8XX-VDIM-P/G2

BACKLIT LED PANEL LIGHT

#### FIXTURE ORDERING INFORMATION

| CATALOG NUMBER               | CARTON QTY. | UPC          | EASY CODE |
|------------------------------|-------------|--------------|-----------|
| KT-BPLED40-24-835-VDIM-P /G2 | 2           | 843654146805 | GMH-18    |
| KT-BPLED40-24-840-VDIM-P /G2 | 2           | 843654146812 | XQL-60    |
| KT-BPLED40-24-850-VDIM-P /G2 | 2           | 843654146829 | TUI-93    |

#### **FIXTURE CATALOG NUMBER BREAKDOWN**

## KT-BPLED40-24-8XX-VDIM-P/G2

- 1 Keystone Technologies
- 2 Backlit Panel Light LED Fixture
- 3 Wattage
- 4 2' × 4' Nominal Size
- 5 80 CRI

- **6** Color Temperature
- 7 0-10V Dimming
- 8 Premium DLC
- 9 Second Generation
- 10 Additional Ordering Options (See details and examples below)

#### **10** Additional Ordering Options

| (blank)  | No sensor included        |
|----------|---------------------------|
| /FC1-PIR | Occupancy sensor included |

#### **ORDERING EXAMPLES**

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES\*

KT-BPLED40-24-840-VDIM-P /G2/FC1-PIR/L715P-6/EM5/JBOX

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES\*

KT-BPLED40-24-840-VDIM-P /G2/FC1-PIR/EM5/JBOX/480

FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES\*

KT-BPLED40-24-840-VDIM-P /G2/FC1-PIR/JBOX

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

KT-BPLED40-24-840-VDIM-P /G2/FC1-PIR

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

KT-BPLED40-24-840-VDIM-P

#### **KEYSTONE FIXTURE**

CATALOG NUMBER

KT-BPLED40-24-840-VDIM-P /G2

### SENSORS

| $\checkmark$ | SUFFIX   | CATALOG NUMBER     |
|--------------|----------|--------------------|
| $\checkmark$ | /FC1-PIR | KTSL-FC1-UV-KO-PIR |

#### **CORD SETS**

| $\checkmark$ | SUFFIX   | CATALOG NUMBER     |
|--------------|----------|--------------------|
| <b>√</b>     | /L715P-6 | KT-CS-L715P-6-16/3 |

#### **EMERGENCY BACKUP**

| $\checkmark$ | SUFFIX | CATALOG NUMBER            |
|--------------|--------|---------------------------|
| $\checkmark$ | /EM5   | KT-EMRG-LED-5C-500-EN /DF |

#### MOUNTS AND BRACKETS

| modified and billion and |        |                 |  |  |
|--------------------------|--------|-----------------|--|--|
| $\checkmark$             | SUFFIX | CATALOG NUMBER  |  |  |
| $\checkmark$             | /JBOX  | KT-BPLED-JBOX-2 |  |  |

### STEP-DOWN TRANSFORMERS

| $\checkmark$ | SUFFIX | CATALOG NUMBER       |
|--------------|--------|----------------------|
| <b>√</b>     | /480   | KTAT-250-480-277 /SF |

**Note:** Step-down transformers cannot be ordered in conjunction with standard SJTOW cord set options (contact Keystone sales rep for available custom options if needed).

<sup>\*</sup> When ordering more then one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.

Note: All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.