



# KT-LED18PAR38-NF-8XX

## REPLACEMENT LAMP

### DESCRIPTION

18W Commercial PAR38 Lamp | 3000–4000K | >80 CRI | Narrow Flood



<b>LAMP TYPE:</b> Commercial PAR38
<b>BASE TYPE:</b> E26 (Medium)
<b>WATTAGE:</b> 18W
<b>COLOR TEMPERATURE:</b> 3000–4000K
<b>COLOR RENDERING INDEX (CRI):</b> > 80
<b>WARRANTY:</b> 5 Years




### PRODUCT FEATURES

- Up to 75% energy saving compared to legacy equivalent lamps
- Can be used in base-up or base-down position
- Rated for open and recessed fixtures
- Large metal heatsink for optimal heat dissipation
- THD <20%
- PF >0.90
- Operating temperature range –4°F/–20°C to 113°F/45°C
- Ideal for recessed corridor and high-power flood lighting
- Suitable for dry and damp location
- Meets Energy Star requirements
- UL 1993 and 1598C Rated

### ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Description	Color Temp	Input Voltage	Rated Lamp Wattage	Legacy Equivalent Wattage	Base Type	Lumens	CRI	Light Distribution	Dimmable	Efficacy
KT-LED18PAR38-NF-830	Commerical PAR38 bulb. Universal input voltage, Narrow flood, Non-dimmable	3000K	120–277V	18W	250W halogen	E26	1950 L	>80	25	No	108 lm/W
KT-LED18PAR38-NF-840	Commerical PAR38 bulb. Universal input voltage, Narrow flood, Non-dimmable	4000K	120–277V	18W	250W halogen	E26	2060 L	>80	25	No	114 lm/W

### PHYSICAL CHARACTERISTICS

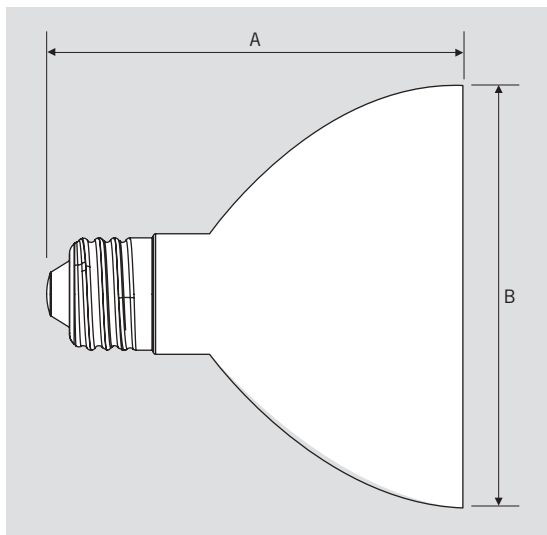

### RATED LIFE

L70 (Hours)	50,000
-------------	--------

### PACKAGING

Carton Quantity	12 pcs
Carton Dimensions	5.45" × 14.4" × 19"
Carton Weight	23.14 lbs

### LAMP DIMENSIONS

A (Length)	5.03"
B (Diameter)	4.73"

**BASE TYPE:** E26 (Medium)