

SINCE 1945

KEYSTONE

LIGHT MADE EASY®



XFIT
VAPOR TIGHTS

NOVEMBER 2024

Rugged and Powerful



Energy-efficient fixtures for demanding environments.

Our vapor tights can effortlessly stand up to the toughest conditions. They feature an IP66 rating, ensuring that moisture and dust don't get in, and can be used in environments that feature food equipment and splash zones.

They're easy to install, come in many sizes in both standard and medium-width body options, and can be customized to suit your environment with controls and selectable outputs.


In fact, with 3 power outputs and 3 CCT, it's 9 fixtures in 1.

This is Light Made Easy[®] even when the surroundings are challenging.



Medium Width

Same aesthetic as standard width with wider body and higher lumen output




ADJUSTABLE MOUNTING CLIPS
Mounting clip can move left or right on track



SIMPLE SENSING
Add motion sensing with our control solutions

MULTIPLE LENGTHS
Standard in 2', 4', and 8'
Medium Width in 4' and 8'

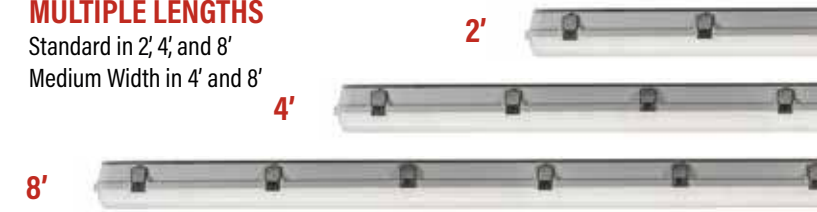


IMPACT RESISTANT
Smooth, diffused polycarbonate lens for even presentation

SMART LOOP COMPATIBLE
Add wireless control to Medium Width model for convenient lighting control of your entire space



Standard

Traditional design with narrow body



ONE MANUFACTURER
With fixture, driver, and emergency backup from Keystone, you get guaranteed compatibility and performance.



Standard | Power and Color Select



XFIT

CATALOG NUMBER		SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-VTLED25PS-2A-8CSA-VDIM	2ft	25W	3500K	3250	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3275	131 lm/W				
			5000K	3300	132 lm/W				
	20W	3500K	2660	133 lm/W					
		4000K	2680	134 lm/W					
		5000K	2700	135 lm/W					
	15W	3500K	2040	136 lm/W					
		4000K	2055	137 lm/W					
		5000K	2070	138 lm/W					
KT-VTLED44PS-4A-8CSA-VDIM	4ft	44W	3500K	5764	131 lm/W	120-277V	0-10V	Yes	>80
			4000K	5808	132 lm/W				
			5000K	5852	133 lm/W				
	28W	3500K	3892	139 lm/W					
		4000K	3920	140 lm/W					
		5000K	3948	141 lm/W					
	18W	3500K	2556	142 lm/W					
		4000K	2574	143 lm/W					
		5000K	2592	144 lm/W					
KT-VTLED75PS-4A-8CSA-VDIM	4ft	75W	3500K	9750	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	9825	131 lm/W				
			5000K	9900	132 lm/W				
	64W	3500K	8512	133 lm/W					
		4000K	8576	134 lm/W					
		5000K	8640	135 lm/W					
	44W	3500K	6160	140 lm/W					
		4000K	6204	141 lm/W					
		5000K	6248	142 lm/W					
KT-VTLED90PS-8A-8CSA-VDIM	8ft	90W	3500K	11790	131 lm/W	120-277V	0-10V	Yes	>80
			4000K	11880	132 lm/W				
			5000K	11970	133 lm/W				
	75W	3500K	10125	135 lm/W					
		4000K	10200	136 lm/W					
		5000K	10275	137 lm/W					
	54W	3500K	7560	140 lm/W					
		4000K	7614	141 lm/W					
		5000K	7668	142 lm/W					

Medium Width | Power and Color Select



XFIT

CATALOG NUMBER		SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-VTLED75PS-4A-8CSA-VDIM	4ft	75W	3500K	9750	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	9825	131 lm/W				
			5000K	9900	132 lm/W				
	64W	3500K	8512	133 lm/W					
		4000K	8576	134 lm/W					
		5000K	8640	135 lm/W					
	44W	3500K	6160	140 lm/W					
		4000K	6204	141 lm/W					
		5000K	6248	142 lm/W					
KT-VTLED90PS-8A-8CSA-VDIM	8ft	90W	3500K	11790	131 lm/W	120-277V	0-10V	Yes	>80
			4000K	11880	132 lm/W				
			5000K	11970	133 lm/W				
	75W	3500K	10125	135 lm/W					
		4000K	10200	136 lm/W					
		5000K	10275	137 lm/W					
	54W	3500K	7560	140 lm/W					
		4000K	7614	141 lm/W					
		5000K	7668	142 lm/W					

LIT-SS-VAPOR TIGHT

Accessories



KTS-MW3-UV-K0-K2

LEARN MORE

