



# 113SHPTP

## ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST



### DESCRIPTION

1 x 13W CFL | 120 Input Voltage | High Power Factor | Preheat Start

**STARTING METHOD:** Preheat

**INPUT VOLTAGE:** 120VAC +5% -10%

**INPUT FREQUENCY:** 60 Hz

**BALLAST FACTOR (LIGHT OUTPUT):** Normal

**WARRANTY:** 3 Years



### PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermal Protection

### ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
CFT13W/GX23 CFFQ13W/GX23	1	120V	15W	0.13A	0.94	1.68	0.88	5.87	10%

### WIRING DIAGRAMS

P1-4

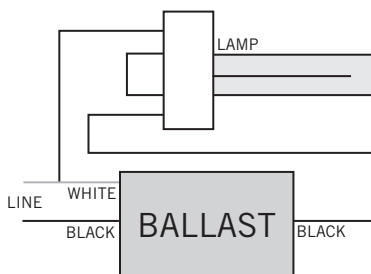

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS

	<b>LENGTH</b>	3.10"
	<b>WIDTH</b>	1.89"
	<b>HEIGHT</b>	1.43"
	<b>MOUNTING</b>	2.75"
	<b>CASE STYLE</b>	C7



# 113SHPTP

## ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
113SHPTP-CP	Carton Pack	50	Active

### CATALOG NUMBER BREAKDOWN

# 1 13SHPTP-CP

