




XFIT **CANOPY FIXTURES**

Square Canopy



Round Canopy

optic with swap

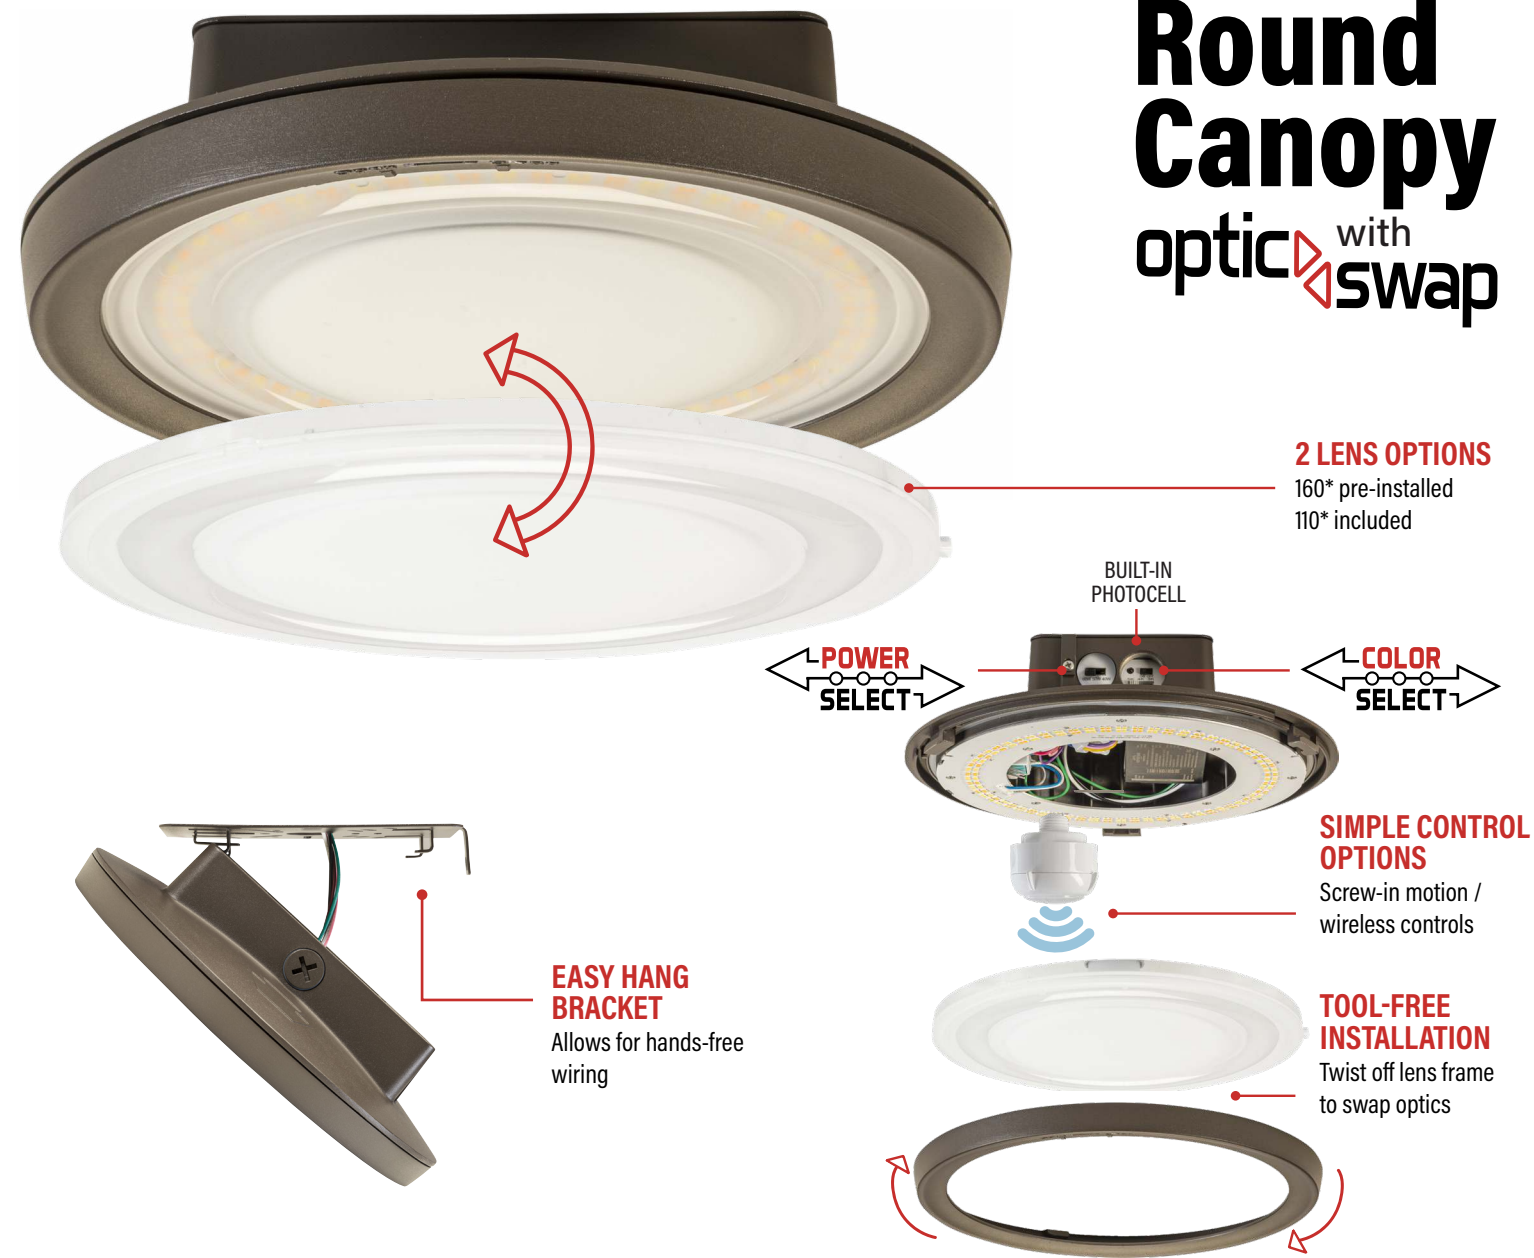

The Canopies that Keep You Covered

Keystone Canopy Fixtures rise above the competition with customizable features, simple installation, and a robust, secure design built for top-tier performance.

Available in square and round form factors, this versatile and efficient lighting solution offers bright, uniform lighting to improve safety and enhance visibility in applications such as parking garages and covered walkways. **That's Light Made Easy®.**

LEARN MORE




IP65 RATED




POWERED BY
KEYSTONE DRIVER



AVAILABLE IN
BRONZE AND WHITE

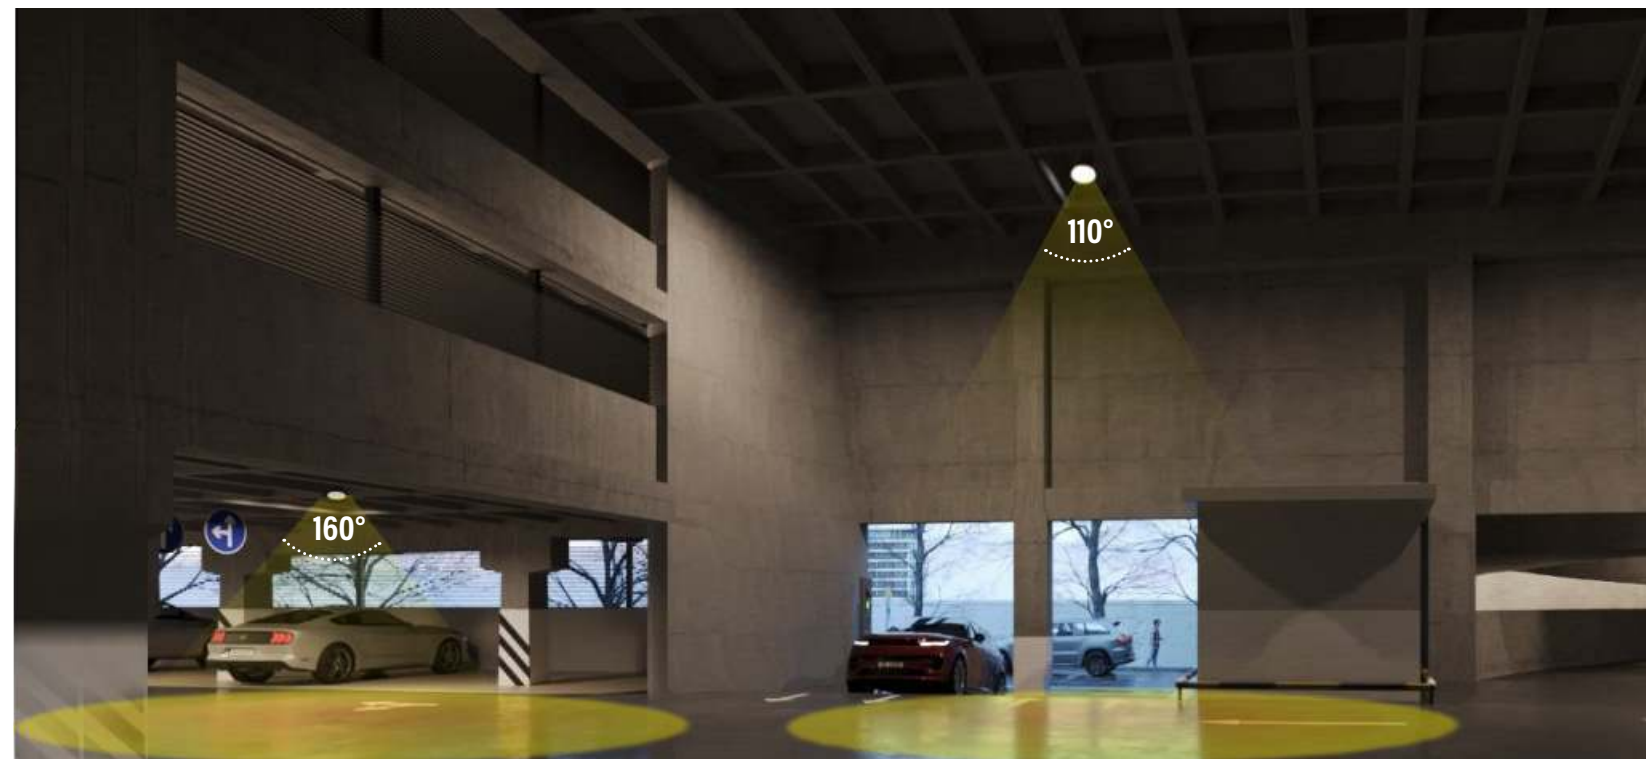


Round Canopy with OpticSwap



CATALOG NUMBER	HOUSING COLOR	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMING	CRI	DISTRIBUTION	
KT-CLED60PS-M2-OSH-8CSB-VDIM	Bronze	10"	60W	3000K	8646	144 lm/W	120-277V	0-10V	>80	160°	
				4000K	9222	154 lm/W					
				5000K	9055	151 lm/W					
KT-CLED60PS-M2-OSH-8CSB-VDIM-W	White		50W	3000K	7372	147 lm/W					
				4000K	7814	156 lm/W					
				5000K	7728	155 lm/W					
		8"	40W	3000K	6248	156 lm/W					
				4000K	6581	165 lm/W					
				5000K	6556	164 lm/W					
KT-CLED40PS-S2-OSH-8CSB-VDIM	Bronze		8"	40W	3000K	5569	139 lm/W	120-277V	0-10V	>80	160°
					4000K	5988	150 lm/W				
					5000K	5878	147 lm/W				
KT-CLED40PS-S2-OSH-8CSB-VDIM-W	White	30W		3000K	4380	146 lm/W					
				4000K	4660	155 lm/W					
				5000K	4641	155 lm/W					
		8"	20W	3000K	3096	155 lm/W					
				4000K	3248	162 lm/W					
				5000K	3267	163 lm/W					
KT-CLED25PS-S2-OSH-8CSB-VDIM	Bronze		8"	25W	3000K	3553	142 lm/W	120-277V	0-10V	>80	160°
					4000K	3783	151 lm/W				
					5000K	3767	151 lm/W				
		20W		3000K	3026	151 lm/W					
				4000K	3203	160 lm/W					
				5000K	3209	160 lm/W					
15W	3000K	2265	151 lm/W								
	4000K	2375	158 lm/W								
	5000K	2397	160 lm/W								

Square Canopy




CATALOG NUMBER	HOUSING COLOR	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMING	CRI	DISTRIBUTION	
KT-CLED60PS-M1-8CSB-VDIM	Bronze	10" square	60W	3000K	7500	125 lm/W	120-277V	0-10V	>80	160°	
				4000K	8400	140 lm/W					
				5000K	7800	130 lm/W					
KT-CLED60PS-M1-8CSB-VDIM-W	White		10" square	50W	3000K	6250					125 lm/W
					4000K	7000					140 lm/W
					5000K	6500					130 lm/W
		8" square	40W	3000K	5000	125 lm/W	120-277V	0-10V	>80	160°	
				4000K	5600	140 lm/W					
				5000K	5200	130 lm/W					
KT-CLED40PS-S1-8CSB-VDIM	Bronze		8" square	40W	3000K	5000					125 lm/W
					4000K	5600					140 lm/W
					5000K	5200					130 lm/W
KT-CLED40PS-S1-8CSB-VDIM-W	White	8" square	30W	3000K	3750	125 lm/W					
				4000K	4200	140 lm/W					
				5000K	3900	130 lm/W					
KT-CLED25PS-S1-8CSB-VDIM	Bronze	8" square	20W	3000K	2500	125 lm/W	120-277V	0-10V	>80	160°	
				4000K	2800	140 lm/W					
				5000K	2600	130 lm/W					
			25W	3000K	3125	125 lm/W					
				4000K	3500	140 lm/W					
				5000K	3250	130 lm/W					
15W	3000K	2500	125 lm/W								
	4000K	2800	140 lm/W								
	5000K	2600	130 lm/W								
		8" square	15W	3000K	1875	125 lm/W					
				4000K	2100	140 lm/W					
				5000K	1950	130 lm/W					

LIT-SS-CANOPY

A variety of accessories available:



TRUNNION MOUNTS



SURFACE MOUNTS



TRUNNION MOUNTS

