



# KT-EMRG-500-SL / B

## EMERGENCY BALLAST



### PRODUCT FEATURES

<b>LIGHT OUTPUT:</b> 500 Lumen
<b>BATTERY:</b> 4.8V Sealed NiCD
<b>INPUT VOLTS:</b> 120/277V, 60Hz
<b>ILLUMINATION TIME:</b> 90 Minutes
<b>WARRANTY:</b> 5 Years



### OPERATING DETAILS

- For use in new or existing fixtures, with or without an AC ballast, where emergency lighting is needed.
- Operates one lamp in the emergency mode.
- 2-in-1 LED indicator light and push-to-test switch (for mandated code compliance testing).
- Internal battery automatically connects to the fluorescent lamp for minimum 90 minute emergency illumination via an internal solid-state transfer switch.
- A discharged battery completely recharges in 24 hours, via a fully automatic solid-state, two-rate charger.
- Usable in sealed and gasketed fixtures.
- Features Time Delay Technology which helps to overcome end-of-life circuit protection.


### LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic, standard and dimming AC ballasts.
- Operates the following lamps under emergency power:

	T5 (W)	T5HO (W)	T8 (W)	T12 (W)	4-Pin GR10q (W)	4-Pin Long CFL (W)	T5 Circline (W)	T9 Circline (W)	U-Bend T8 (W)	U-Bend T12 (W)
<b>No. of Lamps</b>	1	1	1	1	1	1	1	1	1	1
<b>Wattage</b>	21-28	24	25-40	30-40	38	36-40	40-55	32-40	32	34-40

### PHYSICAL SPECIFICATIONS

#### CASE DIMENSIONS

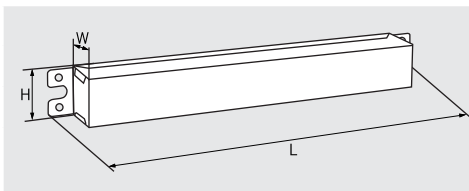

<b>LENGTH</b>	11.70"
<b>WIDTH</b>	1.18"
<b>HEIGHT</b>	2.00"
<b>CASE MATERIAL:</b> Galvanized Steel (Low Profile Design)	

### INITIAL LUMEN OUTPUT

LAMP TYPE	INITIAL LUMENS
	1-Lamp
T5 21W	450
T5 28W	500
T5HO 24W	475
T8 25W	375
T8 40W	500
T12 34W	425
4-Pin GR10q 38W	400
4-Pin PL CFL 40W	425
T5 Circline 55W	500
T9 Circline 32W	350
U-Bend T8 32W	425
U-Bend T12 40W	425



# KT-EMRG-500-SL /B

## EMERGENCY BALLAST

### MOUNTING

- UL listed for factory or field installation. Suitable for damp location.
- Can be mounted inside, on top, or remote from the fixture.\*
- Designed to be used in both switched and unswitched fixtures.


\* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the AC ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-EMRG-500-SL /B-DP	Distributor Pack	1	Quick Ship

### CATALOG NUMBER BREAKDOWN

# KT-EMRG-500-SL /B-DP



Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State codes.