



CC579TP

ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST



DESCRIPTION

1 x 9W CFL | 120 Input Voltage | Normal Power Factor | Preheat Start

| |
|--|
| STARTING METHOD: Preheat |
| INPUT VOLTAGE: 120VAC +5% -10% |
| INPUT FREQUENCY: 60 Hz |
| BALLAST FACTOR (LIGHT OUTPUT): Normal |
| WARRANTY: 3 Years |



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermal Protection

ELECTRICAL SPECIFICATIONS

| Lamp Type | No. of Lamps | Input Volts | Input Watts | Input Current | Power Factor | Crest Factor | Ballast Factor | Ballast Efficacy Factor | Max. THD |
|------------|--------------|-------------|-------------|---------------|--------------|--------------|----------------|-------------------------|----------|
| F8T5 | 1 | 120V | 9W | 0.14A | 0.55 | 1.61 | 0.82 | 9.11 | 15% |
| CFT7W/GX23 | 1 | 120V | 9W | 0.15A | 0.52 | 1.57 | 0.87 | 9.67 | 15% |
| CFT9W/GX23 | 1 | 120V | 9W | 0.15A | 0.54 | 1.58 | 0.75 | 8.33 | 15% |

WIRING DIAGRAMS

P1-3

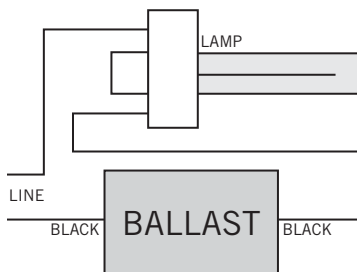

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

| | | |
|--|-------------------|-------|
| | LENGTH | 2.75" |
| | WIDTH | 1.50" |
| | HEIGHT | 1.20" |
| | MOUNTING | 2.25" |
| | CASE STYLE | B1 |

STANDARD LEAD LENGTHS*

| | |
|--------------|-----|
| BLACK | 12" |
|--------------|-----|

*Consult Keystone for special lead length requirements.



CC579TP

ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST

ORDERING INFORMATION

| ORDER CODE | PACKAGING STYLE | PACK QTY. | ITEM STATUS |
|------------|-----------------|-----------|-------------|
| CC579TP-CP | Carton Pack | 72 | Active |

CATALOG NUMBER BREAKDOWN

CC579TP-CP

