



# KT-LED62P-HS-8XX-D

## 2-PIN LED CFL REPLACEMENT LAMP

### DESCRIPTION

6W 2-Pin LED Lamp | 2700-4000K | GX23 Base | Type B Line Voltage Compatible



<b>LAMP TYPE:</b> LED CFL Replacement
<b>BULB TYPE:</b> 2-Pin LED
<b>BASE TYPE:</b> GX23
<b>WATTAGE:</b> 6W
<b>COLOR TEMPERATURE:</b> 2700-4000K
<b>COLOR RENDERING INDEX (CRI):</b> ≥ 83
<b>WARRANTY:</b> 5 Years



### PRODUCT FEATURES

- Approximately 50% more energy efficient vs legacy CFL lamps
- Up to 5x longer life vs traditional lamps
- Frosted diffuser that eliminates pixilation and glare
- Environmentally friendly. No mercury used
- Instant startup
- UL Classified Retrofit Kit
- 50,000 hour lifetime
- Operating temperature: -20°C/-4°F to 45°C/113°F
- Suitable for dry and damp locations
- Not for use in fully enclosed fixtures
- Minimum compartment dimensions: 15.5cm x 12cm / 6.10" x 4.72"
- Compliant with FCC Part 15 Class B

### PERFORMANCE SPECIFICATIONS

Catalog Number	Wattage	CCT	Lumens	Efficacy	Input Voltage	CRI	Base Type	Related Life
KT-LED62P-HS-827-D	6W	2700K	500	83 lm/W	120-277V	≥ 83	GX23	50,000 hrs
KT-LED62P-HS-840-D		4000K	550	92 lm/W				



# KT-LED62P-HS-8XX-D

## 2-PIN LED CFL REPLACEMENT LAMP


### WIRING

#### BYPASS MAGNETIC BALLAST WITH 1 LAMP (Gx23 SOCKET)

**BEFORE**




**AFTER**




#### BYPASS MAGNETIC BALLAST WITH 2 LAMPS (Gx23 SOCKET)


**BEFORE**



**AFTER**

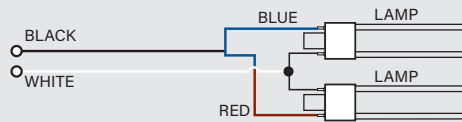

### PHYSICAL SPECIFICATIONS

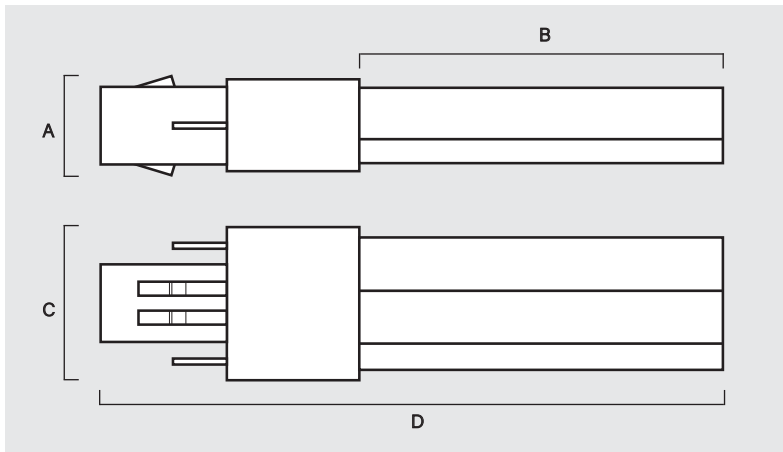

#### LAMP DIMENSIONS

A (Depth)	0.83"
B (Illuminated Length)	5.15"
C (Width)	1.34"
D (Length)	6.06"

### ORDERING INFORMATION

CATALOG NUMBER	UPC	EASY CODE
KT-LED62P-HS-827-D	843654127019	TBB-07
KT-LED62P-HS-840-D	843654127026	TBI-11

### CATALOG NUMBER BREAKDOWN

# KT-LED62P-HS-8XX-D

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Type
- 5 Horizontal Orientation
- 6 Slim Profile
- 6 80 CRI
- 7 CCT
- 8 Direct Drive series