

MH-250A-D-FCAN

250W F-CAN METAL HALIDE



LAMP TYPE: 250W Metal Halide (M58 or H37) **INPUT VOLTAGE:** Dual Tap (120/277) **CIRCUIT TYPE:** CWA


PRODUCT FEATURES

- ANSI Designation: M58 or H37
- Line Voltage: 120/277
- Regulation: 5%
- Frequency: 60 Hz
- Recommended Fuse (A): 8/4
- Circuit Type: CWA
- Insulation Class: 105°C
- Capacitor: Integral
- Winding Materials: Cu/Cu
- Lamp Starter: N/A
- Agency Certification: UL, cUL Listed
- Maximum Distance to Lamp: 10 feet
- Warranty: 2 Years

ELECTRICAL SPECIFICATIONS


LINE VOLTAGE	POWER FACTOR	LINE CURRENT			INPUT POWER	OPEN CIRCUIT VOLTAGE	MINIMUM START TEMP	UL TEMP CODE
		OPERATING	OPEN CIRCUIT	STARTING				
120V	High	2.69A	1.57A	2.18A	314W	285V	-30°C/-22°F	A
277V	High	1.16A	0.68A	0.94A	312W	283V	-30°C/-22°F	A

PHYSICAL SPECIFICATIONS

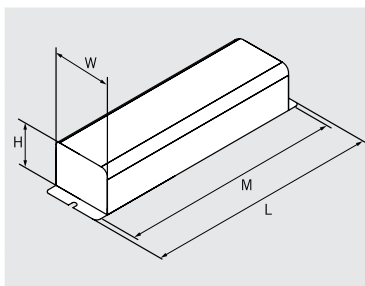

LENGTH	16.60"
WIDTH	3.23"
HEIGHT	2.75"
MOUNTING	16.10"
NET WEIGHT	19 lbs
LEAD LENGTH	12-14"
CASE STYLE	D13

WIRING DIAGRAM

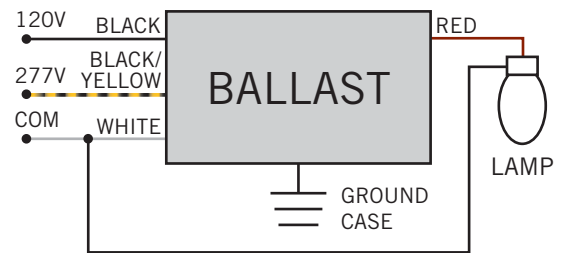

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
MH-250A-D-FCAN	Individually Packaged	1	Quick Ship

CATALOG NUMBER BREAKDOWN

MH-250A-D-FCAN

