



# SS22WSTP

## ELECTROMAGNETIC CIRCLINE BALLAST



### DESCRIPTION

1 x 22W Circline | 120 Input Voltage | Normal Power Factor | Preheat Start

<b>STARTING METHOD:</b> Preheat
<b>INPUT VOLTAGE:</b> 120VAC +5% -10%
<b>INPUT FREQUENCY:</b> 60 Hz
<b>BALLAST FACTOR (LIGHT OUTPUT):</b> Normal
<b>WARRANTY:</b> 3 Years




### PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 32°F, 0°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermal Protection

### ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC6T9	1	120V	20W	0.35A	0.46	1.68	0.79	3.95	20%
FC8T9	1	120V	19W	0.27A	0.59	1.58	0.79	4.16	15%

### WIRING DIAGRAM

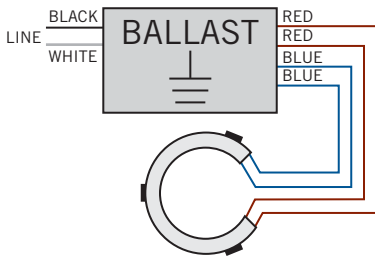

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS

	<b>LENGTH</b>	3.10"
	<b>WIDTH</b>	1.89"
	<b>HEIGHT</b>	1.42"
	<b>MOUNTING</b>	2.75"
	<b>CASE STYLE</b>	C7

#### STANDARD LEAD LENGTHS\*

<b>WHITE</b>	12"
<b>BLACK</b>	12"
<b>BLUE</b>	9"
<b>RED</b>	9"
<b>YELLOW</b>	9"

\*Consult Keystone for special lead length requirements.



# SS22WSTP

## ELECTROMAGNETIC CIRCLINE BALLAST

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
SS22WSTP-CP	Carton Pack	48	Active

### CATALOG NUMBER BREAKDOWN

