

# ONELIGHT




# opticoswap


## **Tool-free lens optimization**

The same fixture can be used to customize light for various spaces—just switch out optic lenses on site. With OpticSwap, Keystone's tool-free lens-changing technology, all you have to do is undo 4 latches. You can use one fixture across an entire project.

# The ultimate in adaptability

**With a variety of customizable features,** our XFit Round High Bays can be used for a variety of spaces on a single project, eliminating special orders and simplifying installation. Available sensors and emergency options make them even more versatile.





120° Optic Lens | 150W



#### **TOOL-FREE LENS CHANGE**

Lens optics can be switched out by simply releasing 4 latches

### All in the box

Fixture with Power & Color Select 2 Optic Lenses:

High-Wattage - 90° installed; 60° included Low-Wattage - 90° installed; 120° included

2 Mounting Accessories: 0-Bolt and J-Hook





# Also Available for everyday applications:

Learn more




- Selectable Power & Color Select options
- Included J-Hook & O-Bolt Ring
- Compact design for optimal performance

Learn more

**Contractor Prime** 



- Dedicated options
- Included O-Bolt Ring
- UL Certified for wet locations

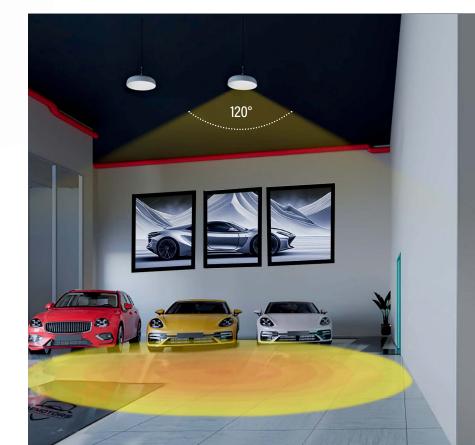



### Round High Bay with OpticSwap | Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE Wattage	SELECTABLE CCT	LUMENS	INPUT Voltage	DIMMABLE	CRI	LENS OPTIONS	HOUSING COLOR
KT-RHLED100PS-12CD-0SD-8CSB-VDIM-P	12" circular	100/70/50W	30/40/50K	15900/11270/8250				90° Installed, 120° Included	Black
KT-RHLED100PS-12CD-0SD-8CSB-VDIM-P-W	12" circular	100/70/50W	30/40/50K	15900/11270/8250				90° Installed, 120° Included	White
KT-RHLED150PS-12CD-0SD-8CSB-VDIM-P	12" circular	100/70/50W	30/40/50K	23100/16200/11550				90° Installed, 120° Included	Black
KT-RHLED150PS-12CD-0SD-8CSB-VDIM-P-W	12" circular	150/100/70W	30/40/50K	23100/16200/11550	120-277V	0-10V	>80	90° Installed, 120° Included	White
KT-RHLED200PS-14CD-0SD-8CSB-VDIM-P	14" circular	200/150/100W	30/40/50K	31400/24150/16600				90° Installed, 120° Included	Black
KT-RHLED200PS-14CD-0SD-8CSB-VDIM-P-W	14" circular	200/150/100W	30/40/50K	31400/24150/16600				90° Installed, 120° Included	White
KT-RHLED240PS-14CD-0SE-8CSB-VDIM-P	14" circular	240/200/150W	30/40/50K	36720/ 31400/ 24300				90° Installed, 60° Included	Black

#### Round High Bay with OpticSwap | High Power | Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE Wattage	SELECTABLE CCT	LUMENS	INPUT VOLTAGE	DIMMABLE	CRI	LENS OPTIONS	HOUSING Color
KT-RHLED200PSHV-14C-8CSB-VDIM-P	14" circular	200/150/100W	30/40/50K	31400/24150/16600	277-480V	0-10V	>80	90° Installed, 120° Included	Black

#### **Accessories**













**SMART LOOP PIR SENSOR** KTSL-FC3-12V-PKO-PIR

SMART LOOP FIXTURE CONTROLLER KTSL-FC4-12V-PK0

SMART PORT MICROWAVE SENSOR KTS-MW3-12V PKO

**SMART PORT PIR SENSOR** KTS-PIR3-12V PKO /G2



CANOPY COVER FEED KIT KT-RHLED-5CC-1-F-KIT



SURFACE MOUNT KIT KT-RHLED-SM-1-KIT /G2 KT-RHLED-JB0X-PM /G2



J-BOX MOUNT KIT



**CLEAR POLYCARBONATE** DOME REFLECTOR



ALUMINUM DOME REFLECTOR KT-RHLED-CL90-1-KIT /G2 KT-RHLED-AR90-1-KIT /G2



WIRE GUARD KT-RHLED-WG-1-KIT /G2



**EMERGENCY** J-BOX MOUNT KIT KT-EMRG-LED-40SD-5000-CEN /SF

