



SINCE 1945

KEYSTONE

LIGHT MADE EASY®

XFIT

INDOOR FIXTURES

APRIL 2022



**Indoor fixtures
for every
solution.**

**Keystone offers versatility and
flexibility in every light.**


They're backed by innovation and quality from the brand you trust, another reason Keystone is your one-stop shop for any project or application.

A tradition of expertise.

- 6 HIGH BAYS
- 12 BACK-LIT PANELS
- 16 CENTER BASKETS
- 20 WRAPS
- 24 STRIPS
- 28 VAPOR TIGHTS
- 32 STAIRWELLS
- 36 SHOP LIGHTS
- 40 TUBE READY
- 44 SPECS

We bring over seven decades of electrical and lighting expertise to the table with our innovative new series of indoor luminaires. Featuring energy-efficient LED technology, quality light output and efficacy, easy installation, and backed by a sturdy 5-year warranty, Keystone's indoor series provides solutions for the market challenges seen today.

Our indoor series is the ideal way to upgrade legacy fixtures—or add contemporary technology to new construction opportunities. The proof is in the product.



The Power to Reduce SKUs

Keystone Power and Color Select technology turns one fixture into many with adjustable power outputs and color temperatures—and supports contractors with one-stop shopping choices for every lighting application.

XFIT | HIGH BAY FIXTURES



High lumen output with the most efficient, energy-saving LED technology.





RoHS
Compliant



5 YEAR
WARRANTY

Keystone's linear and round high bays offer more wattage, color, and control options than those of any other lighting manufacturer. With a host of accessories available—and the ability to be managed by our SmartLoop wireless control system—you can feel confident you've chosen the right fixture for the job.

LINEAR HIGH BAYS



AVAILABLE POWER AND COLOR SELECT TECHNOLOGY
ALLOWS CHOICE OF FIELD-ADJUSTABLE LUMEN
OUTPUTS, COLOR TEMPS




SCREW-IN MOTION SENSORS:
EASIEST TO INSTALL IN THE
INDUSTRY



WITH SMART LOOP WIRELESS CONTROL,
COMMISSION AND PROGRAM WITHOUT
A SCISSOR LIFT



Architectural grade
I-beam design: Longer
lifespan and increased
efficiency.



Powered by Keystone
0-10V dimming LED
driver.





Available with dedicated
wattage and color
temperatures.

CCT: 4000K, 5000K
Wattages: 65W-215W
Lumens: 10100-30600

Learn more



ROUND HIGH BAYS

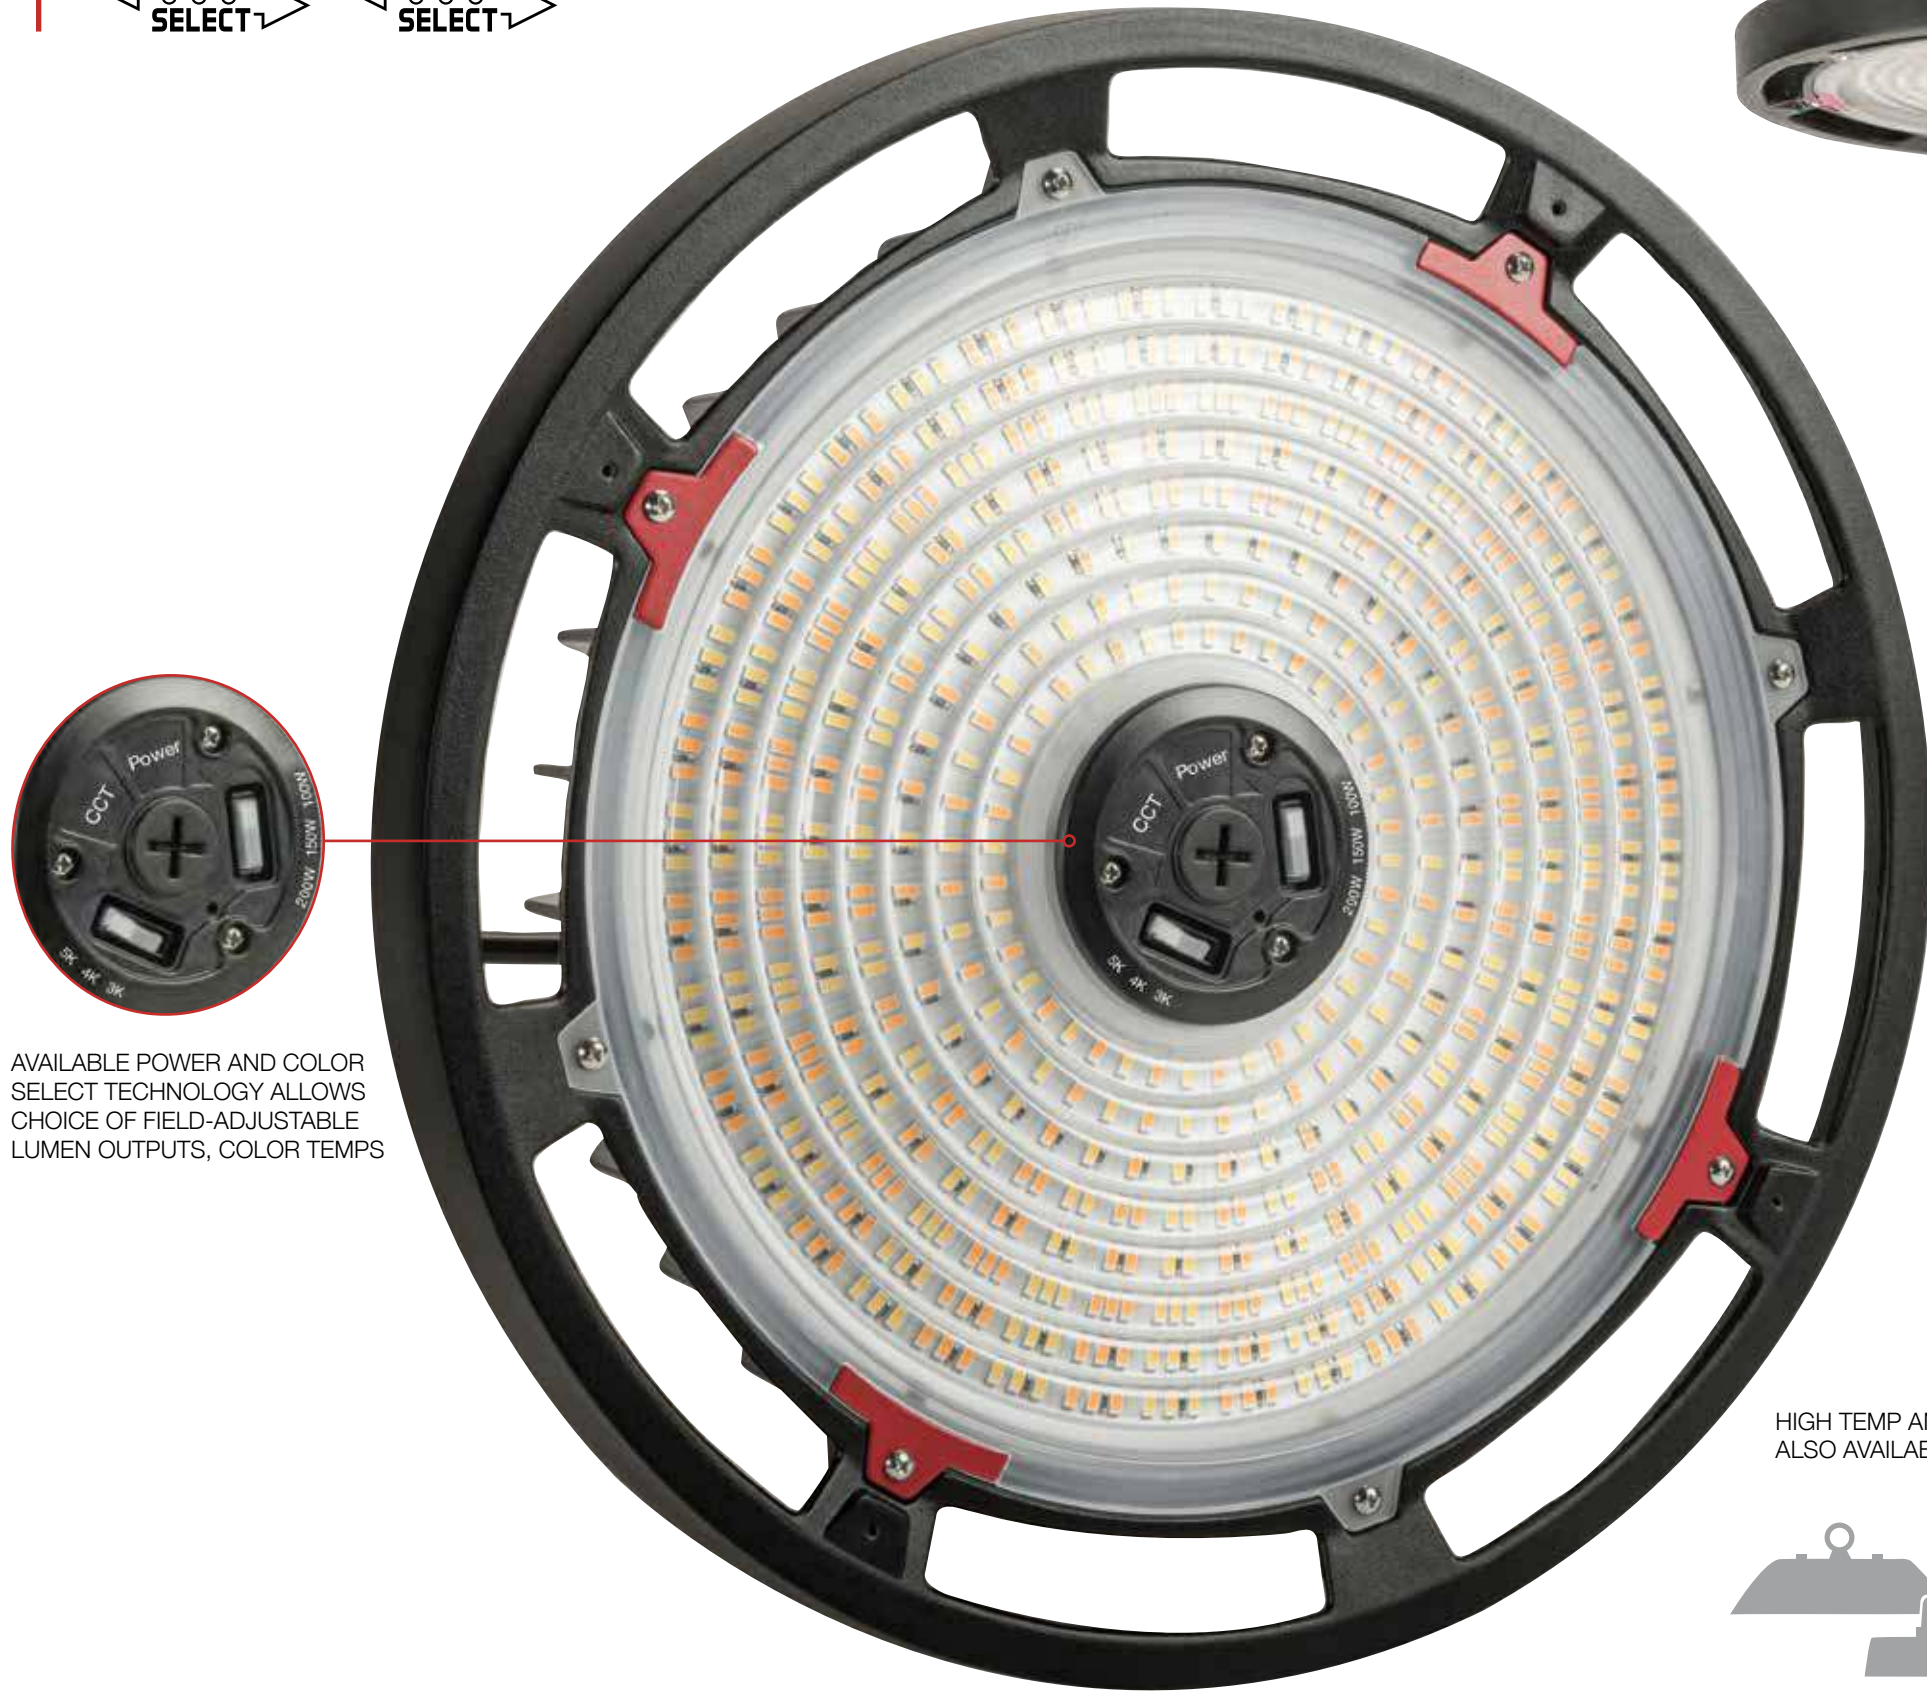

AVAILABLE POWER AND COLOR SELECT TECHNOLOGY ALLOWS CHOICE OF FIELD-ADJUSTABLE LUMEN OUTPUTS, COLOR TEMPS




WITH SMART LOOP WIRELESS CONTROL, COMMISSION AND PROGRAM WITHOUT A SCISSOR LIFT

HIGH TEMP AND WASHDOWN ALSO AVAILABLE

SCREW-IN MOTION SENSORS: EASIEST TO INSTALL IN THE INDUSTRY



Unique driver housing with heat sink fins added for greater heat dissipation.



Powered by Keystone 0-10V dimming LED driver.




Available with dedicated wattage and color temperatures.

CCT: 3000K, 4000K, 5000K
Wattages: 100W, 150W, 200W
Lumens: 14800-33000

Learn more



XFit | BACK-LIT PANEL LIGHT FIXTURES

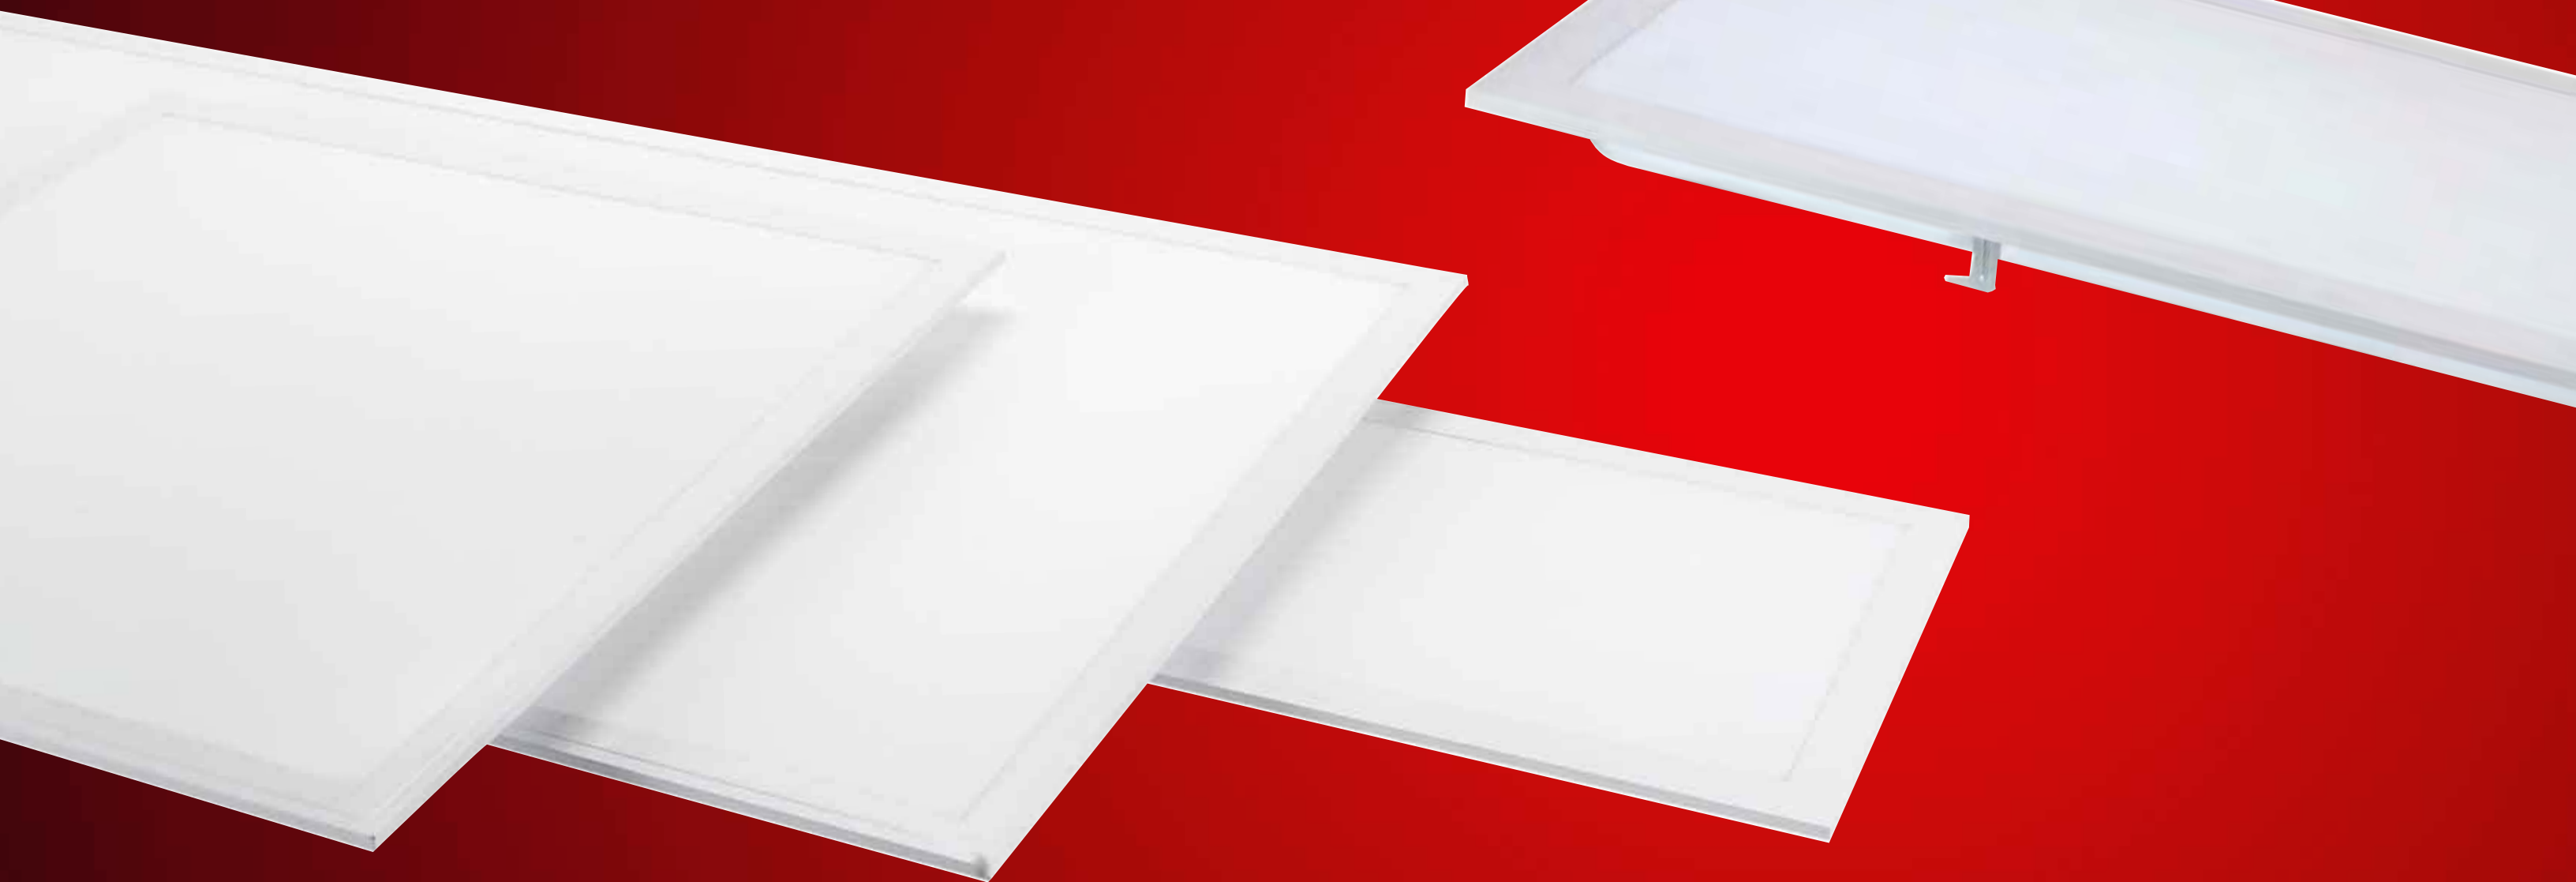

A long-lasting and easy-to-install solution for providing quality light.





RoHS
Compliant



5 YEAR
WARRANTY

Keystone's Back-Lit Panels offer a sleek, modern ambience to commercial buildings. Smooth, even lighting creates a "skylight" experience, while different color temperature options help to create the perfect environment to support a productive workspace. Available retrofit kit allows you to get the same benefits without going above the ceiling to upgrade fixtures.

BACK-LIT PANEL LIGHTS

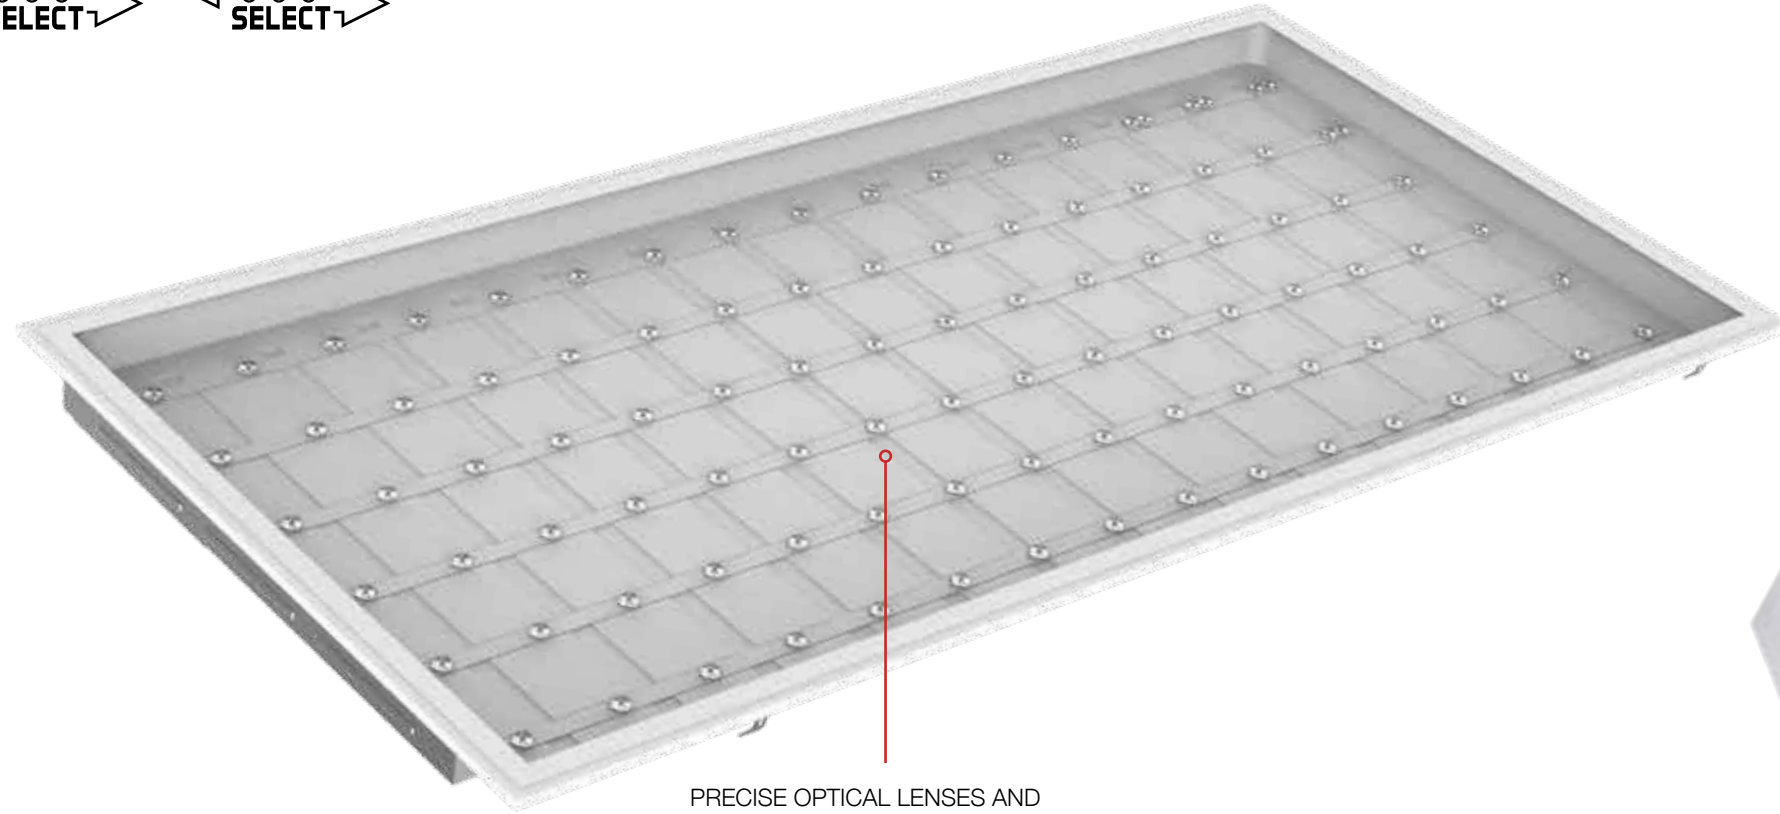


PRECISE OPTICAL LENSES AND LIGHT GUIDES PROVIDE EVEN DIFFUSION



POWER AND COLOR SELECT OFFER SIGNIFICANT SKU REDUCTION



Fits standard T-grid ceilings: Longer lifespan and increased efficiency.



Powered by Keystone 0-10V dimming LED driver.



Ideal application use: Schools, offices, and other commercial spaces.


Sizes: 1x4', 2x2', 2x4'

CCT: 3500K, 4000K, 5000K

Wattages: 20W-40W

Lumens: 2400-6200

Learn more



XFIT | CENTER BASKET FIXTURES



General illumination that saves on energy and maintenance.





RoHS
Compliant



5 YEAR
WARRANTY

The Keystone Center Basket offers a classy upgrade to standard troffer lighting. With various sizes, wattages, and color temperatures available, the Center Basket turns a commercial office space into an engaging work environment.

CENTER BASKETS



POWER AND COLOR SELECT TECHNOLOGY AVAILABLE



SMARTLOOP WIRELESS CONTROL PROVIDES INDIVIDUAL FIXTURE CONTROL AND ZONING FLEXIBILITY, HELPING TO FUTURE-PROOF THE LIGHTING IN YOUR SPACE.



Easy installation and servicing: Large access panel on back of fixture.



Low optical flicker.



Long lifetime: L70 of greater than 100,000 hours.



PROVIDES SMOOTH, EVEN, DIMMABLE LIGHT

ARCHITECTURAL-GRADE CENTER BASKET VOLUMETRIC DESIGN



Sizes: 1x4', 2x2', 2x4'
CCT: 3500K, 4000K, 5000K
Wattages: 15W-45W
Lumens: 1845-5625

Learn more



XFIT | WRAP FIXTURES



**General-purpose lighting
for surface-mounted ceiling
applications.**

Keystone Wrap Fixtures are available in both standard and architectural curved lenses. Keystone wraps provide comfortable, even illumination across wide areas and individual workspaces.




RoHS
Compliant




5 YEAR
WARRANTY

WRAPS



POWER AND COLOR SELECT TECHNOLOGY AVAILABLE


LEDs OFFER MORE THAN 50% ENERGY SAVINGS OVER TRADITIONAL LUMINAIRES

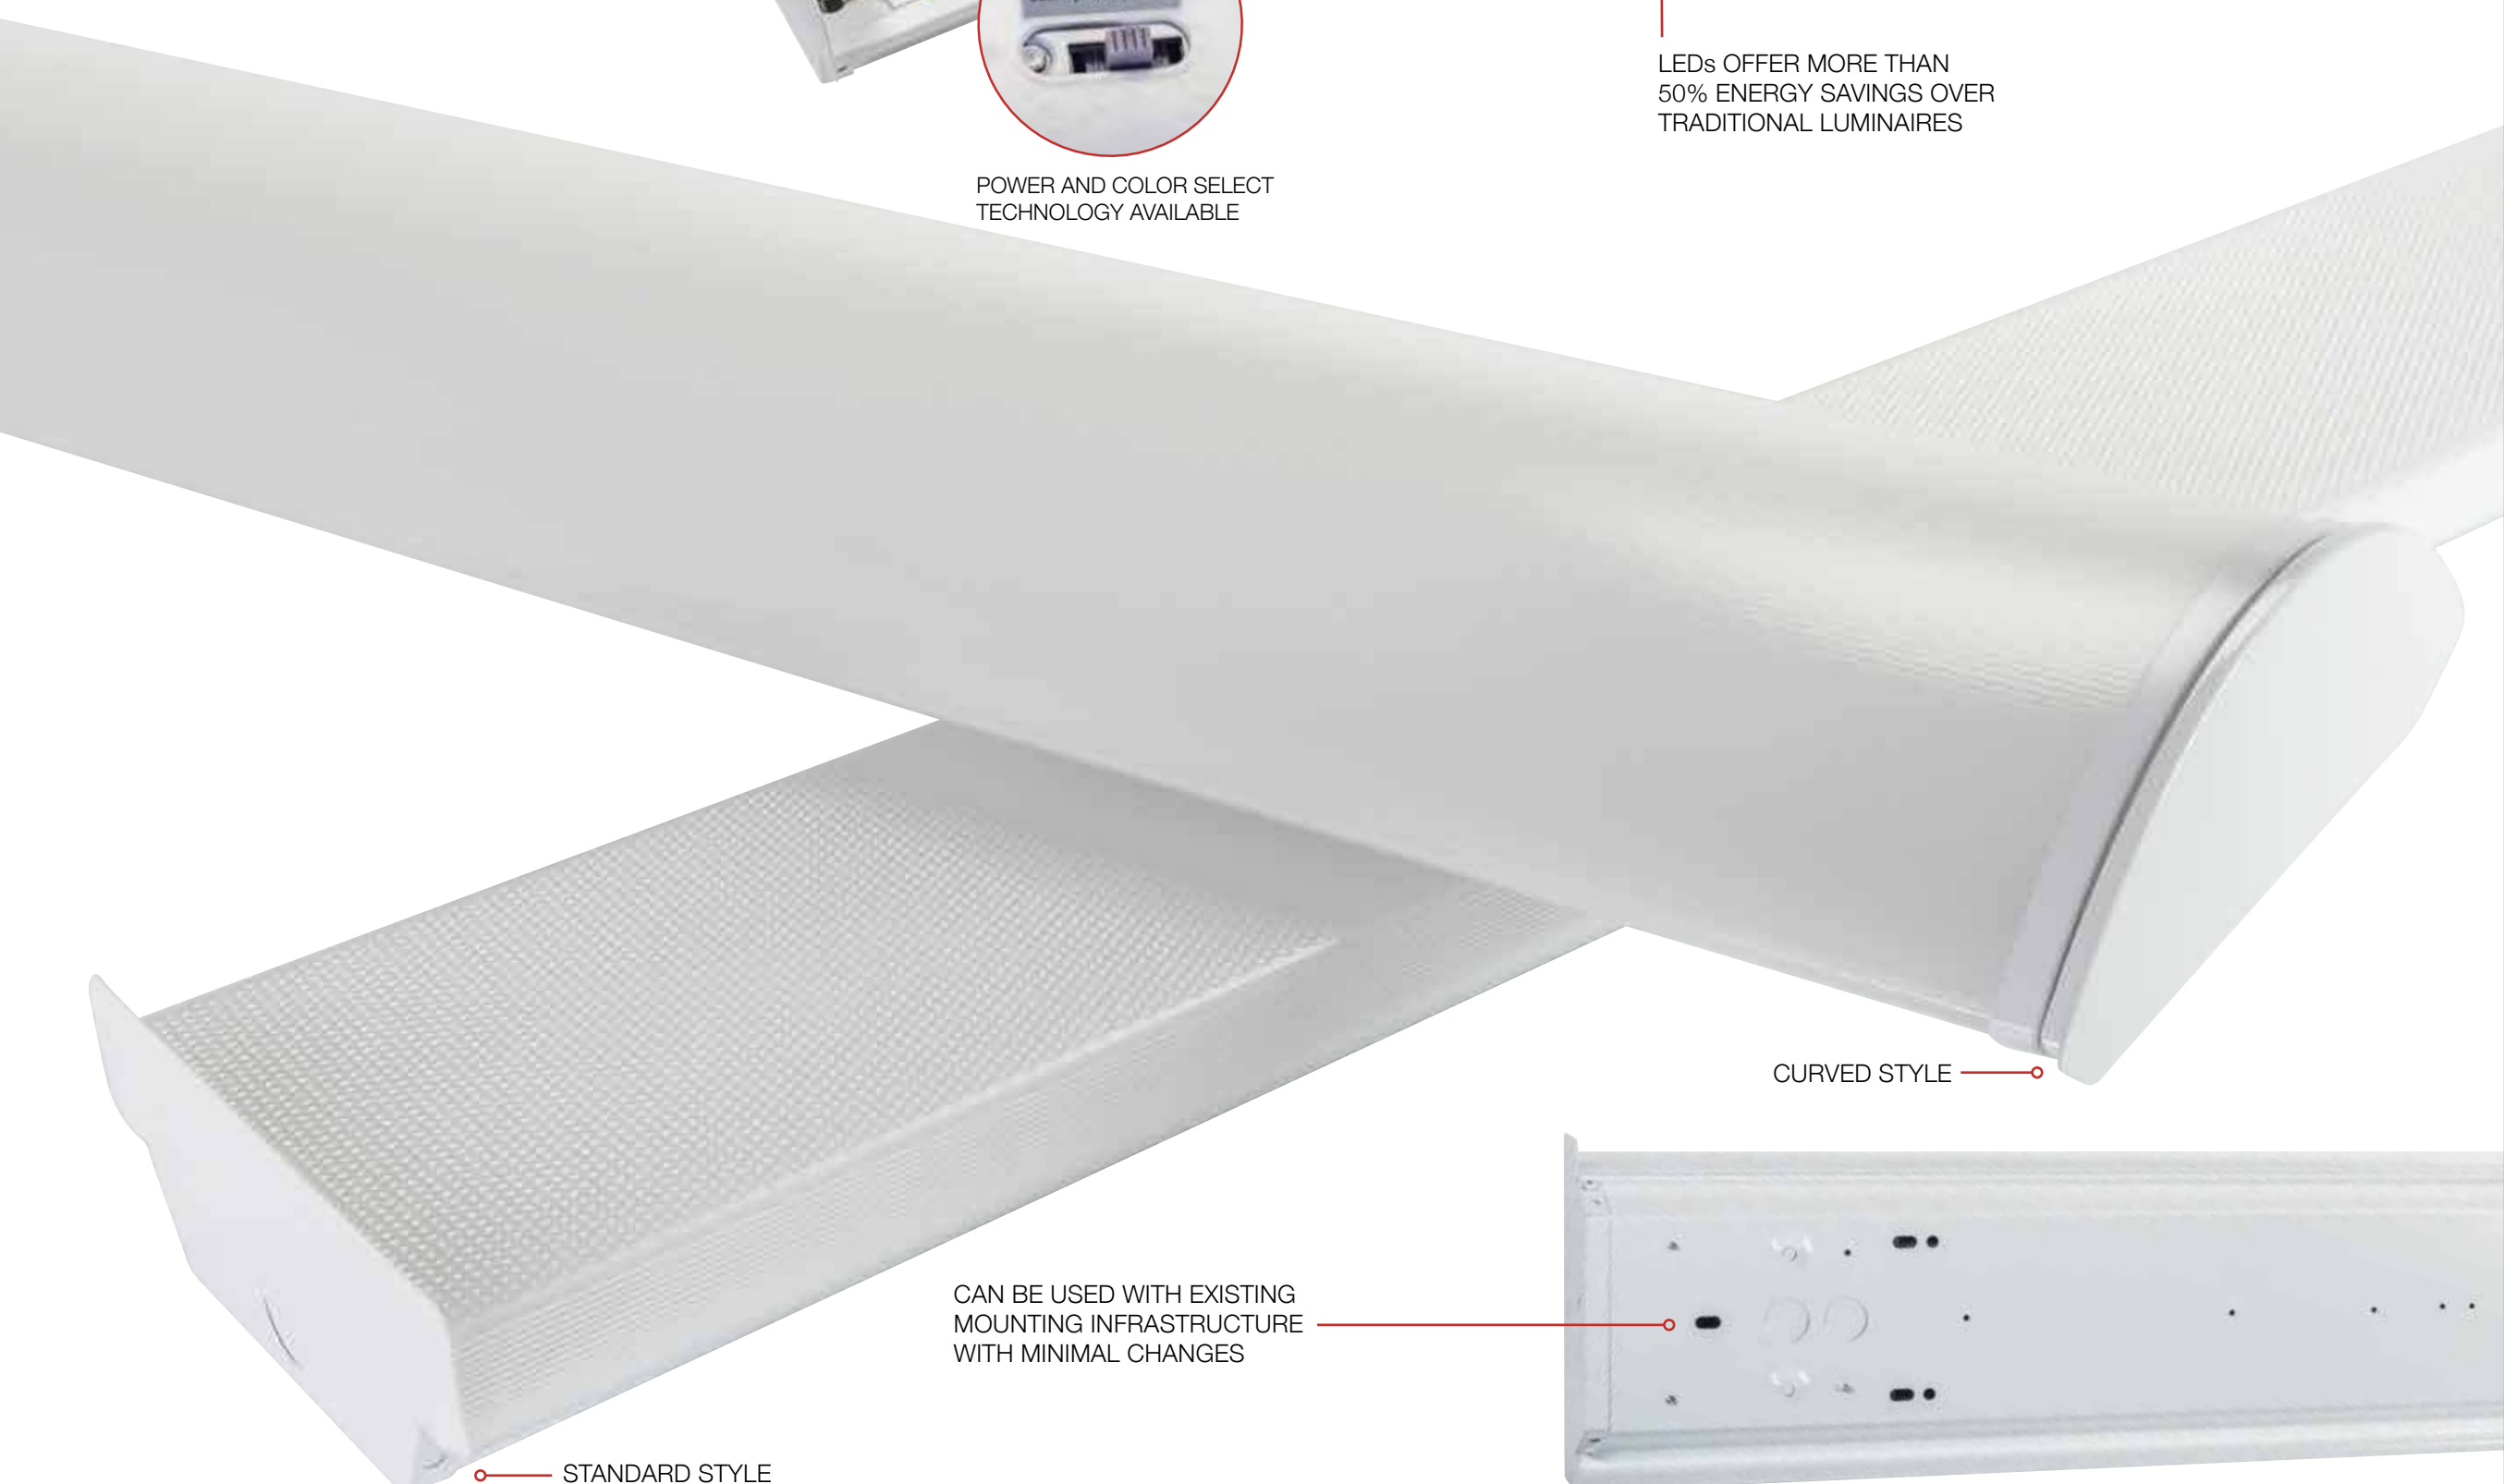

STANDARD STYLE

CURVED STYLE

CAN BE USED WITH EXISTING MOUNTING INFRASTRUCTURE WITH MINIMAL CHANGES



Even light distribution: Lens style provides even light output without light leaks or shadows.



Reduces replacement and maintenance costs in comparison to fluorescent fixtures.



Offers substantial energy savings, long life, and reduced maintenance costs.

Size: 4'

CCT: 3500K, 4000K, 5000K

Wattages: 18W, 28W, 44W

Lumens: 2628-6116

Learn more



XFIT | STRIP FIXTURES



A high-efficacy solution for new construction or fluorescent strip fixture replacements.




RoHS
Compliant



5 YEAR
WARRANTY

Slim and stylish, Keystone Micro LED Strips produce quality, high-efficiency lighting that's perfect for new construction or fluorescent strip fixture replacements. Great for general area lighting as well as task and cove lighting.

STRIPS



POWER SELECT SWITCH



COLOR SELECT SWITCH




DISTRIBUTES LIGHT EVENLY THROUGH WORKSPACES



Even light distribution:
Lens style provides even light output without light leaks or shadows.



Reduces replacement and maintenance costs in comparison to fluorescent fixtures.



Energy savings:
LED lighting offers more than 50% energy savings over traditional luminaires.

Sizes: 2', 4', 8'
CCT: 3500K, 4000K, 5000K
Wattages: 15W-90W
Lumens: 2100-12060

Learn more



XFIT | VAPOR TIGHT FIXTURES




Durable construction for a long-lasting solution.



The Keystone Vapor Tight stands out from the crowd thanks to highly durable construction and an attractive, narrow design. For use in any application where water intrusion is a factor.

VAPOR TIGHTS



POWER AND COLOR SELECT TECHNOLOGY AVAILABLE



STAINLESS STEEL CLIPS

IMPACT-RESISTANT POLYCARBONATE LENS



Narrow design:
Appropriate for rugged,
demanding applications.



IP65 Rated, suitable
for wet locations.



Long lifetime: L70 of
greater than 100,000
hours.

Sizes: 2', 4', 8'
CCT: 3500K, 4000K, 5000K
Wattages: 15W-90W
Lumens: 1920-11700

Learn more



XFIT | STAIRWELL FIXTURES



**Innovative illumination to
light the way.**




RoHS
Compliant




5 YEAR
WARRANTY

Keystone's Stairwell Fixtures provide safety and security in stairwells and corridors and feature integrated ultrasonic occupancy sensors and compatibility with Smart Safe emergency LED drivers. Available with Keystone's Power Select and Color Select technology, they're ideal for commercial and retail applications and offer proven dependability in a modern design.

STAIRWELLS



CHANGE POWER OUTPUT AND COLOR TEMPERATURE AS NEEDED WITH ADJUSTABLE SWITCHES




COLOR SELECT SWITCH

POWER SELECT SWITCH

AVAILABLE WITH INTEGRATED EMERGENCY BATTERY 5W OR 12W OPTIONS (FACTORY INSTALLED)



TRIMPOTS SETTINGS
LEFT: DETECTION RANGE
RIGHT: TIME DELAY



DIPSWITCH DIMMING ADJUSTMENT (50%, 25%, 10%, OFF)


INTEGRATED ULTRASONIC SENSORS PREVENT FALSE OR UN-NEEDED "ON" STATES



Offers bright light for building egress.



Ultrasonic occupancy sensor for motion detection, ensuring pathfinding lighting.




Guaranteed performance between Keystone driver, fixture, and emergency backup.

Sizes: 2', 4'
CCT: 3500K, 4000K, 5000K
Wattages: 15W-45W
Lumens: 1950-5580

Learn more



XFIT | SHOP LIGHT FIXTURES

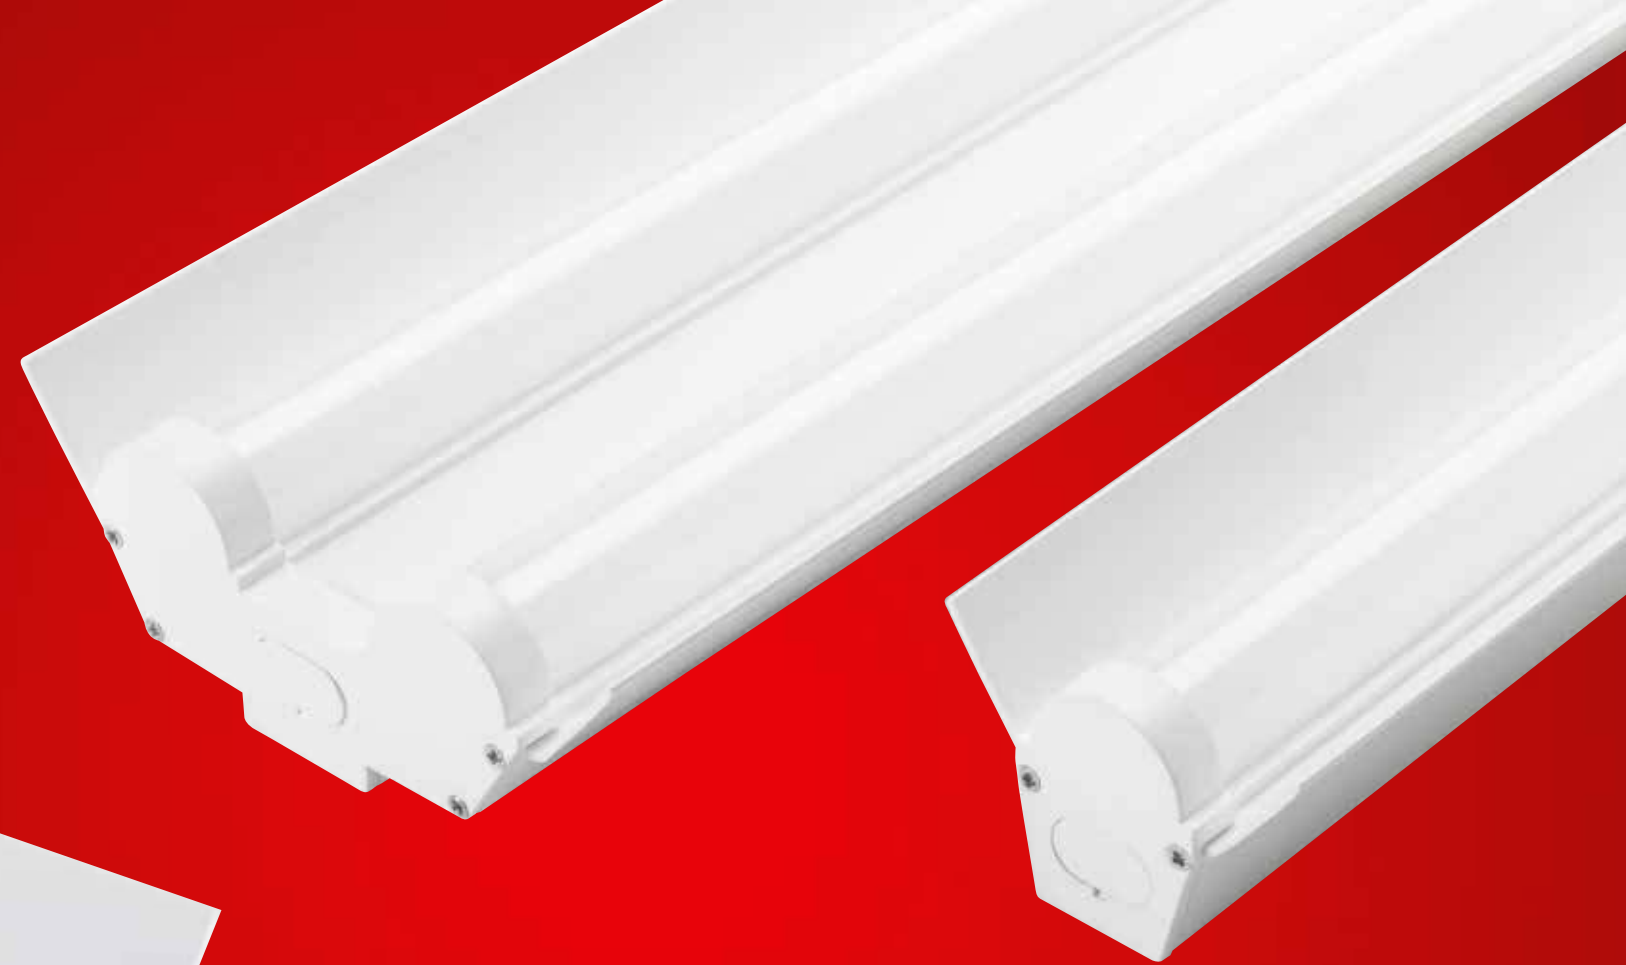

**Breathes new light into shops,
basements, and garages.**



RoHS
Compliant



5 YEAR
WARRANTY

Keystone's versatile shop lights offer easy installation and give you the lighting punch you need for carrying out specific, intricate tasks.

SHOP LIGHTS

INSTALLS IN MINUTES


CAN LINK UP TO 8 LED SHOP LIGHT FIXTURES END TO END WITH ONLY ONE OUTLET



4000K COLOR TEMPERATURE MAKES FOCUSING ON DETAILS EASY



Features a sleek architectural design.



LED offers substantial energy savings compared to fluorescent lighting.



Offers >80 CRI for clear, clean illumination.

Size: 4'

CCT: 4000K

Wattages: 23W, 40W

Lumens: 2600, 4000

Learn more



XFIT | TUBE READY FIXTURES



**Bypass the ballast for easy
installation.**

TUBE READY



PRISMATIC TROFFER



HIGH BAY



STRIP



WRAP



ALL FIXTURES ARE PRE-WIRED FOR USE WITH KEYSTONE'S DIRECT DRIVE SINGLE-ENDED LED TUBES AND DX2 SINGLE-OR DOUBLE-ENDED LED TUBES (SINGLE-ENDED WIRING ONLY)



Designed for use with Keystone's UL Type B LED tubes. (Tubes sold separately)



Ideal for indoor high bay, low bay, warehouse, and general lighting applications.

HIGH BAY

Size: 4'

Max Lamp Wattage: 25W

Number of Lamps: 4 or 6

PRISMATIC TROFFER

Sizes: 2X2', 2X4'

Max Lamp Wattage: 25W

Number of Lamps: 2, 3 or 4

STRIP

Sizes: 4', 8'

Max Lamp Wattages: 25W-45W

Number of Lamps: 1, 2 or 4

WRAP

Size: 4'

Max Lamp Wattage: 25W

Number of Lamps: 2 or 4

Learn more



Ordering Guide for Color Selection

When a Keystone product has a catalog number that uses an "xx," it indicates that several color temperatures are available. The color temperatures for that product are noted in the accompanying chart.

Below is a quick reference guide to Keystone's color offering and how to easily select and order the right product for your job.

To order, simply replace the "xx" with the first two numbers from the corresponding color temperature.

Example:

To order a 4000K color temperature product, replace the "xx" in the catalog number with the two-digit number represented above the Kelvin desired as indicated in color chart below.

Catalog number with "xx"

KT-BPLED40-14-8xx-VDIM

Catalog number used to order a 5000K color temperature product

KT-BPLED40-14-850-VDIM

22 2200K Amber White	27 2700K Warm White	30 3000K Soft White	35 3500K Neutral White	40 4000K Cool White	50 5000K Daylight White	65 6500K Bright White
----------------------------	---------------------------	---------------------------	------------------------------	---------------------------	-------------------------------	-----------------------------

Linear High Bay

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-HBLED105PS-2FB-8CSD-VDIM-P	2ft	105W	4000K	15200	145 lm/W	120-277V	0-10V	Yes	>80
			5000K	15300	146 lm/W				
		90W	4000K	13400	149 lm/W				
			5000K	13500	150 lm/W				
		65W	4000K	10100	155 lm/W				
			5000K	10200	157 lm/W				
KT-HBLED215PS-2FB-8CSD-VDIM-P	2ft	215W	4000K	30500	142 lm/W	120-277V	0-10V	Yes	>80
			5000K	30600	142 lm/W				
		175W	4000K	25900	148 lm/W				
			5000K	26000	149 lm/W				
		135W	4000K	20800	154 lm/W				
			5000K	20900	155 lm/W				

Linear High Bay

Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS
KT-HBLED60-1.5F-8xx-VDIM-P /G2	1.5ft	60W	8700	145lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED80-1.5F-8xx-VDIM-P /G2	1.5ft	80W	11700	146lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED90-1.5F-8xx-VDIM-P /G2	1.5ft	90W	13800	153lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED115-1.5F-8xx-VDIM-P /G2	1.5ft	115W	17250	150lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED155-2F-8xx-VDIM-P /G2	2ft	155W	23250	150lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED185-2F-8xx-VDIM-P /G2	2ft	185W	27750	150lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED230-4F-8xx-VDIM-P /G2	4ft	230W	34500	150lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K
KT-HBLED270-4F-8xx-VDIM-P /G2	4ft	270W	40500	150lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K

*Generation 1 fixtures available while supplies last. Contact Keystone sales rep for details.

Sensors












CATALOG NUMBER	DESCRIPTION	
KTS-PIR3-12V-PKO /A	Screw-in PIR sensor for linear high bays, preset for 1 min hold time, 3 min standby time at 30% dim, daylight disabled	
KTS-PIR3-12V-PKO /B	Screw-in PIR sensor for linear high bays, preset for 5 min hold time, 10 min standby time at 10% dim, daylight disabled	
KTS-MW3-12V-PKO /A	Screw-in microwave sensor for linear high bays, preset for 1 min hold time, 3 min standby time at 30% dim, daylight disabled	
KTS-MW3-12V-PKO /B	Screw-in microwave sensor for linear high bays, preset for 5 min hold time, 10 min standby time at 10% dim, daylight disabled	
KTS-MW3-REMOTECONTROL	Remote control for KTS-MW3-12V-PKO /A or /B and KTS-PIR3-12V-PKO /A or /B sensors, used to set and adjust all sensor settings	
KTSL-FC3-12V-PKO-PIR	Bluetooth mesh screw-in PIR occupancy sensor with built-in fixture controller for SmartLoop system	
KTSL-HBFC1-UV-KO-PIR	Bluetooth mesh PIR occupancy sensor with built-in fixture controller for SmartLoop system	
KTS-PIR2-UV-KO	PIR occupancy sensor with adjustable controls for time delay and day lighting, standby dimming levels	






Chart continues on next page

Linear High Bay

Mounts and Brackets FOR POWER AND COLOR SELECT MODELS

CATALOG NUMBER	DESCRIPTION	
KT-HBLEDSM-1B-KIT	Surface mount kit for 2FB LED high bay fixtures	
KT-HBLEDPM-1B-KIT	Pendant mount kit for 2FB LED high bay fixtures	
KT-HBLEDCABLE-1B-KIT	Aircraft cable hanging kit for 2FB LED high bay fixtures	
KT-HBLEDWG-1B-KIT	Wire guard kit for KT-HBLEDD215PS-2FB-8CSD-VDIM-P LED high bay fixtures	
KT-HBLEDWG-2B-KIT	Wire guard kit for KT-HBLEDD105PS-2FB-8CSD-VDIM-P LED high bay fixtures	
KT-HBLEDEM-BR-1B-KIT	Emergency LED backup mounting bracket kit for 2FB LED high bay fixtures	

Mounts and Brackets FOR STANDARD MODELS

CATALOG NUMBER	DESCRIPTION	
KT-HBLEDSM-1-KIT	Surface mount kit for LED high bay fixtures	
KT-HBLEDPM-1-KIT	Pendant mount kit for LED high bay fixtures	
KT-HBLEDCABLE-KIT	Aircraft cable hanging kit for LED high bay fixtures	
KT-HBLEDWG-1-KIT /G2	Wire guard for "-2F" /G2 linear high bay (155W)	
KT-HBLEDWG-2-KIT /G2	Wire guard for "-2F" /G2 linear high bay (185W)	
KT-HBLEDWG-3-KIT /G2	Wire guard for "-4F" /G2 linear high bay (230W, 270W)	
KT-HBLEDWG-4-KIT/G2	Wire guard for "1.5F" /G2 linear high bay (60W, 80W, 90W)	
KT-HBLEDWG-5-KIT /G2	Wire guard for "1.5F" /G2 linear high bay (115W)	
KT-HBLEDEM-BR-KIT	Emergency LED backup mounting bracket kit for LED high bay fixtures	

Round High Bay

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	HOUSING COLOR
KT-RHLED200PS-14C-8CSB-VDIM-P	14"	200W	3000K	28400	142 lm/W	120-277V	0-10V	Yes	>80	Black
			4000K	33000	165 lm/W					
			5000K	31200	156 lm/W					
		150W	3000K	21450	143 lm/W					
			4000K	24750	165 lm/W					
			5000K	24150	161 lm/W					
		100W	3000K	14800	148 lm/W					
			4000K	16500	165 lm/W					
			5000K	16300	163 lm/W					

Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS	HOUSING COLOR
KT-RHLED100-12C-8xx-VDIM-P /G2	12"	100W	15900	159 lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K	Black
KT-RHLED150-12C-8xx-VDIM-P /G2	12"	150W	23600	157 lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K	Black
KT-RHLED200-14C-8xx-VDIM-P /G2	14"	200W	32000	160 lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K	Black
KT-RHLED240-14C-8xx-VDIM-P /G2	14"	240W	36625	152 lm/W	120-277V	0-10V	Yes	>80	4000K or 5000K	Black

Sensors










CATALOG NUMBER	DESCRIPTION	
KTS-PIR3-12V-PKO /A	Screw-in PIR sensor for linear high bays, preset for 1 min hold time, 3 min standby time at 30% dim, daylight disabled	
KTS-PIR3-12V-PKO /B	Screw-in PIR sensor for linear high bays, preset for 5 min hold time, 10 min standby time at 10% dim, daylight disabled	
KTS-MW3-12V-PKO /A	Screw-in microwave sensor for linear high bays, preset for 1 min hold time, 3 min standby time at 30% dim, daylight disabled	
KTS-MW3-12V-PKO /B	Screw-in microwave sensor for linear high bays, preset for 5 min hold time, 10 min standby time at 10% dim, daylight disabled	
KTS-MW3-REMOTECONTROL	Remote control for KTS-MW3-12V-PKO /A or /B and KTS-PIR3-12V-PKO /A or /B sensors, used to set and adjust all sensor settings	
KTSL-FC3-12V-PKO-PIR	Bluetooth mesh screw-in PIR occupancy sensor with built-in fixture controller for SmartLoop system	

Chart continues on next page

Round High Bay

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-RHLED-SM-1-KIT /G2	Steel surface mount kit, includes mounting hardware, fits all "12C" sized high bay fixtures	
KT-RHLED-SM-2-KIT /G2	Steel surface mount kit, includes mounting hardware, fits all "14C" sized high bay fixtures	
KT-RHLED-JBOX-PM /G2	J-Box, optimized for pole pendant and step down transformer applications, fits all round LED high bay fixtures	
KT-RHLED-AR90-1-KIT /G2	Aluminum dome reflector, 90° beam angle, includes mounting hardware, fits all "12C" sized high bay fixtures	
KT-RHLED-AR90-2-KIT /G2	Aluminum dome reflector, 90° beam angle, includes mounting hardware, fits "14C" sized high bay fixtures	
KT-RHLED-CL90-1-KIT /G2	Clear polycarbonate dome reflector with bottom lens, 90° beam angle, includes mounting hardware, fits all "12C" sized high bay fixtures	
KT-RHLED-CL90-2-KIT /G2	Clear polycarbonate dome reflector with bottom lens, 90° beam angle, includes mounting hardware, fits all "14C" sized high bay fixtures	
KT-RHLED-WG-1-KIT /G2	Thick steel wire guard, premium powdercoat construction, includes mounting hardware, fits all "12C" sized high bay fixtures	
KT-RHLED-WG-2-KIT /G2	Thick steel wire guard, premium powdercoat construction, includes mounting hardware, fits all "14C" sized high bay fixtures	

Plugs

CATALOG NUMBER	DESCRIPTION
KT-P-515P	125V NEMA 5-15P plug
KT-P-L515P	125V NEMA L5-15P twist lock plug
KT-P-L615P	250V NEMA L6-15P twist lockplug
KT-P-L715P	277V NEMA L7-15P twist lock plug
KT-P-L720P	277V NEMA L7-120P twist lock plug

Back-Lit Panel

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-BPLED40PS-14-8CSA-VDIM /G2	1'x4'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4600	115 lm/W				
			5000K	4450	111 lm/W				
		30W	3500K	3400	113 lm/W				
			4000K	3600	120 lm/W				
			5000K	3450	115 lm/W				
		20W	3500K	2400	120 lm/W				
			4000K	2600	130 lm/W				
			5000K	2450	123 lm/W				
KT-BPLED40PS-22-8CSA-VDIM /G2	2'x2'	40W	3500K	4400	110 lm/W	120-277V	0-10V	Yes	>80
			4000K	4500	113 lm/W				
			5000K	4450	111 lm/W				
		30W	3500K	3400	113 lm/W				
			4000K	3500	117 lm/W				
			5000K	3450	115 lm/W				
		20W	3500K	2400	120 lm/W				
			4000K	2500	125 lm/W				
			5000K	2450	123 lm/W				
KT-BPLED50PS-24-8CSA-VDIM /G2	2'x4'	50W	3500K	5850	117 lm/W	120-277V	0-10V	Yes	>80
			4000K	6200	124 lm/W				
			5000K	5900	118 lm/W				
		40W	3500K	4850	121 lm/W				
			4000K	5200	130 lm/W				
			5000K	4900	123 lm/W				
		30W	3500K	3850	128 lm/W				
			4000K	4200	140 lm/W				
			5000K	3900	130 lm/W				

Standard

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCT
KT-BPLED40-14-8xx-VDIM	1'x4'	40W	4400	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-22-8xx-VDIM	2'x2'	30W	3300	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-22-8xx-VDIM	2'x2'	40W	4400	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-24-8xx-VDIM	2'x4'	40W	4400	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED50-24-8xx-VDIM	2'x4'	50W	5500	110 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K


Chart continues on next page

Back-Lit Panel


Premium

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS
KT-BPLED30-14-8xx-VDIM-P	1'x4'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED20-22-8xx-VDIM-P	2'x2'	20W	2500	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-22-8xx-VDIM-P	2'x2'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED30-24-8xx-VDIM-P	2'x4'	30W	3750	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-BPLED40-24-8xx-VDIM-P	2'x4'	40W	5000	125 lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K


Mounts and Brackets FOR POWER & COLOR SELECT AND STANDARD MODELS

CATALOG NUMBER	DESCRIPTION	
KT-BPLED-JBOX-1	Expansion junction box optimized for Standard and Color/Power Select back-lit LED panels	

Mounts and Brackets FOR PREMIUM






CATALOG NUMBER	DESCRIPTION	
KT-BPLED-JBOX-2	Expansion junction box optimized for Premium back-lit LED panels	

Sensors

CATALOG NUMBER	DESCRIPTION	
KTSL-FC1-UV-KO-PIR	Bluetooth mesh wireless fixture controller for SmartLoop system with remote mountable daylight and PIR motion sensor	

Back-Lit Panel

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-BPLED-CABLE-KIT	Cable hanging kit for LED back-lit panel lights, includes 2 cable sets	
KT-BPLED-SM-14-KIT /G2	Surface mount kit for 1'x4' LED back-lit panel lights, white finish	
KT-BPLED-SM-22-KIT /G2	Surface mount kit for 2'x2' LED back-lit panel lights, white finish	
KT-BPLED-SM-24-KIT /G2	Surface mount kit for 2'x4' LED back-lit panel lights, white finish	
KT-BPLED-EM-14-KIT	Emergency LED backup mounting kit for 1'x4' LED back-lit panel lights	
KT-BPLED-EM-22/4-KIT	Emergency LED backup mounting kit for 2'x2' and 2'x4' back-lit panel lights	



Center Basket Troffer

Power and Color Select



CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI						
KT-CBLED35PS-14B-8CSA-VDIM	1'x4'	35W	3500K	4375	125 lm/W	120-277V	0-10V	Yes	>80						
			4000K	4410	126 lm/W										
			5000K	4445	127 lm/W										
		30W	3500K	3900	130 lm/W										
			4000K	3930	131 lm/W										
			5000K	3960	132 lm/W										
		24W	3500K	3192	133 lm/W										
			4000K	3216	134 lm/W										
			5000K	3240	135 lm/W										
KT-CBLED24PS-22B-8CSA-VDIM	2'x2'	24W	3500K	3072	128 lm/W	120-277V	0-10V	Yes	>80						
			4000K	3096	129 lm/W										
			5000K	3120	130 lm/W										
		18W	3500K	2412	134 lm/W										
			4000K	2430	135 lm/W										
			5000K	2448	136 lm/W										
		15W	3500K	2055	137 lm/W										
			4000K	2070	138 lm/W										
			5000K	2085	139 lm/W										
		KT-CBLED35PS-22B-8CSA-VDIM	2'x2'	35W	3500K					4480	128 lm/W	120-277V	0-10V	Yes	>80
					4000K					4515	129 lm/W				
					5000K					4550	130 lm/W				
30W	3500K			3930	131 lm/W										
	4000K			3960	132 lm/W										
	5000K			3990	133 lm/W										
24W	3500K			3216	134 lm/W										
	4000K			3240	135 lm/W										
	5000K			3264	136 lm/W										
KT-CBLED30PS-24B-8CSA-VDIM	2'x4'			30W	3500K	3840	128 lm/W	120-277V	0-10V	Yes	>80				
					4000K	3870	129 lm/W								
					5000K	3900	130 lm/W								
		25W	3500K	3350	134 lm/W										
			4000K	3375	135 lm/W										
			5000K	3400	136 lm/W										
		20W	3500K	2740	137 lm/W										
			4000K	2760	138 lm/W										
			5000K	2780	139 lm/W										
		KT-CBLED45PS-24B-8CSA-VDIM	2'x4'	45W	3500K	5760	128 lm/W					120-277V	0-10V	Yes	>80
					4000K	5805	129 lm/W								
					5000K	5850	130 lm/W								
38W	3500K			4978	131 lm/W										
	4000K			5016	132 lm/W										
	5000K			5054	133 lm/W										
30W	3500K			4110	137 lm/W										
	4000K			4140	138 lm/W										
	5000K			4170	139 lm/W										

Center Basket Troffer

Sensors FOR POWER AND COLOR SELECT MODELS

CATALOG NUMBER	DESCRIPTION	
KTSL-FC2-12V-SM-PIR	Bluetooth wireless integrated fixture controller	

Mounts and Brackets



CATALOG NUMBER	DESCRIPTION	
KT-CBLED-RMF-14-KIT	Recessed mount flange kit for 1x4 center basket fixtures	
KT-CBLED-RMF-22-KIT	Recessed mount flange kit for 2x2 center basket fixtures	
KT-CBLED-RMF-24-KIT	Recessed mount flange kit for 2x4 center basket fixtures	
KT-CBLED-SM-14-KIT	Surface mount kit for 1x4 LED center basket troffers	
KT-CBLED-SM-22-KIT	Surface mount kit for 2x2 LED center basket troffers	
KT-CBLED-SM-24-KIT	Surface mount kit for 2x4 LED center basket troffers	

Curved Wrap

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-CWLED44PS-4-8CSA-VDIM	4ft	44W	3500K	5984	136 lm/W	120-277V	0-10V	Yes	>80
			4000K	6072	138 lm/W				
			5000K	6116	139 lm/W				
		28W	3500K	4004	143 lm/W				
			4000K	4032	144 lm/W				
			5000K	4060	145 lm/W				
		18W	3500K	2628	146 lm/W				
			4000K	2646	147 lm/W				
			5000K	2664	148 lm/W				

Sensors FOR POWER AND COLOR SELECT MODELS

CATALOG NUMBER	DESCRIPTION	
KTSL-FC2-12V-SM-PIR	Bluetooth wireless integrated fixture controller	

*This sensor requires KT-CWLED-SLB-1 to be used with fixture.


Mounts and Brackets FOR POWER AND COLOR SELECT MODELS

CATALOG NUMBER	DESCRIPTION	
KT-CWLED-SLB-1	Curved wrap bracket for SmartLoop KTSL-FC2-12V-SM-PIR sensor	

Standard


CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS
KT-CWLED40-4-8xx-VDIM-P	4'	40W	5200	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K

Sensors

CATALOG NUMBER	DESCRIPTION	
KTS-MW3-UV-K0-K2	Microwave sensor kit, includes 120-277V input to 12V DC converter, IP65 12V input sensor head, Nomex sleeve, extension neck	

*Additional mounting needed, KT-CWLED-SLB-1

Mounts and Brackets


CATALOG NUMBER	DESCRIPTION	
KT-CWLED-TRIM-1	Trim plate for KT-CWLED fixtures, used to cover up existing holes from larger fixtures, 20 in x 52 in	

Standard Wrap

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-WLED44PS-4-8CSA-VDIM	4ft	44W	3500K	5852	133 lm/W	120-277V	0-10V	Yes	>80
			4000K	5896	134 lm/W				
			5000K	5940	135 lm/W				
		28W	3500K	3948	141 lm/W				
			4000K	3976	142 lm/W				
			5000K	4004	143 lm/W				
		18W	3500K	2664	148 lm/W				
			4000K	2682	149 lm/W				
			5000K	2700	150 lm/W				

Sensors FOR POWER AND COLOR SELECT MODELS

CATALOG NUMBER	DESCRIPTION	
KTS-MW3-UV-K0-K2	Microwave sensor kit, includes 120-277V input to 12V DC converter, IP65 12V input sensor head, Nomex sleeve, extension neck	

Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS
KT-WLED33-4-8xx-VDIM-P /G2	4'	33W	4290	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K

*Generation 1 fixtures available while supplies last. Contact Keystone sales rep for details.

Strips

Power and Color Select



CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-MSLED25PS-2-8CSA-VDIM	2ft	25W	3500K	3250	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3275	131 lm/W				
			5000K	3300	132 lm/W				
		20W	3500K	2720	136 lm/W				
			4000K	2740	137 lm/W				
			5000K	2760	138 lm/W				
		15W	3500K	2085	139 lm/W				
			4000K	2100	140 lm/W				
			5000K	2115	141 lm/W				
KT-MSLED44PS-4-8CSA-VDIM	4ft	44W	3500K	5808	132 lm/W	120-277V	0-10V	Yes	>80
			4000K	5852	133 lm/W				
			5000K	5896	134 lm/W				
		28W	3500K	3892	139 lm/W				
			4000K	3920	140 lm/W				
			5000K	3948	141 lm/W				
		18W	3500K	2556	142 lm/W				
			4000K	2574	143 lm/W				
			5000K	2592	144 lm/W				
KT-MSLED90PS-8-8CSA-VDIM	8ft	90W	3500K	11880	132 lm/W	120-277V	0-10V	Yes	>80
			4000K	11970	133 lm/W				
			5000K	12060	134 lm/W				
		75W	3500K	10125	135 lm/W				
			4000K	10200	136 lm/W				
			5000K	10275	137 lm/W				
		54W	3500K	7668	142 lm/W				
			4000K	7722	143 lm/W				
			5000K	7776	144 lm/W				

Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCT
KT-MSLED19-2-8xx-VDIM-P	2'	19W	2510	132lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-MSLED18-4-8xx-VDIM-P	4'	18W	2340	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-MSLED28-4-8xx-VDIM-P	4'	28W	3700	132lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-MSLED44-4-8xx-VDIM-P	4'	44W	5765	131lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-MSLED54-8-8xx-VDIM-P	8'	54W	7210	134lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K




Strips

Sensors

CATALOG NUMBER	DESCRIPTION	
KTSL-FC2-12V-SM-PIR*	Bluetooth mesh wireless low voltage individual fixture controller for SmartLoop system	
KTS-MW3-UV-K0-K2	Microwave sensor kit, includes 120-277V input to 12V DC converter, IP65 12V input sensor head, Nomex sleeve, extension neck	

*This sensor requires KT-MSLED-SLB-1 to be used with fixture.

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-MSLED-VH-KIT	Two (2) V-hooks and chains for microstrip brackets, brackets included with microstrip fixtures	
KT-MSLED-LSM-KIT	Metal bracket for linear linking of microstrip fixtures	
KT-MSLED-SLB-1	Microstrip bracket for SmartLoop KTSL-FC2-12V-SM-PIR sensor	

Vapor Tights

Power and Color Select


CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-VTLED25PS-2-8CSA-VDIM	2ft	25W	3500K	3250	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	3275	131 lm/W				
			5000K	3300	132 lm/W				
		20W	3500K	2660	133 lm/W				
			4000K	2680	134 lm/W				
			5000K	2700	135 lm/W				
		15W	3500K	2040	136 lm/W				
			4000K	2055	137 lm/W				
			5000K	2070	138 lm/W				
KT-VTLED44PS-4-8CSA-VDIM	4ft	44W	3500K	5764	131 lm/W	120-277V	0-10V	Yes	>80
			4000K	5808	132 lm/W				
			5000K	5852	133 lm/W				
		28W	3500K	3892	139 lm/W				
			4000K	3920	140 lm/W				
			5000K	3948	141 lm/W				
		18W	3500K	2556	142 lm/W				
			4000K	2574	143 lm/W				
			5000K	2592	144 lm/W				
KT-VTLED75PS-4-8CSA-VDIM	4ft	75W	3500K	9750	130 lm/W	120-277V	0-10V	Yes	>80
			4000K	9825	131 lm/W				
			5000K	9900	132 lm/W				
		64W	3500K	8512	133 lm/W				
			4000K	8576	134 lm/W				
			5000K	8640	135 lm/W				
		44W	3500K	6160	140 lm/W				
			4000K	6204	141 lm/W				
			5000K	6248	142 lm/W				
KT-VTLED90PS-8-8CSA-VDIM	8ft	90W	3500K	11790	131 lm/W	120-277V	0-10V	Yes	>80
			4000K	11880	132 lm/W				
			5000K	11970	133 lm/W				
		75W	3500K	10125	135 lm/W				
			4000K	10200	136 lm/W				
			5000K	10275	137 lm/W				
		54W	3500K	7560	140 lm/W				
			4000K	7614	141 lm/W				
			5000K	7668	142 lm/W				

Vapor Tights


Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS
KT-VTLED19-2-8xx-VDIM-P	2'	19W	2465	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-VTLED18-4-8xx-VDIM-P	4'	18W	2340	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-VTLED28-4-8xx-VDIM-P	4'	28W	3640	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-VTLED44-4-8xx-VDIM-P	4'	44W	5720	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-VTLED63-4-8xx-VDIM-P	4'	63W	8190	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-VTLED54-8-8xx-VDIM-P	8'	54W	7020	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K
KT-VTLED90-8-8xx-VDIM-P	8'	90W	11700	130lm/W	120-277V	0-10V	Yes	>80	3500K, 4000K, or 5000K

Sensors

CATALOG NUMBER	DESCRIPTION	
KTS-MW3-UV-K0-K2	Microwave sensor kit, includes 120-277V input to 12V DC converter, IP65 12V input sensor head, Nomex sleeve, extension neck	

Mounts and Brackets



CATALOG NUMBER	DESCRIPTION	
KT-VTLED-45SM-1-KIT	45° steel surface mount kit for all Keystone vapor tight fixtures	
KT-VTLED-TPSCREW-KIT	Screws for tamper-proofing vapor tight fixtures, includes 14 screws	
KT-VTLED-EM-SCREW	Screws for installing emergency backup in fixture	

Stairwells

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
KT-SWLED25PS-2A-8CSA-VDIM-P	2ft	25W	3500K	3100	124 lm/W	120-277V	0-10V	Yes	>80
			4000K	3125	125 lm/W				
			5000K	3150	126 lm/W				
		20W	3500K	2540	127 lm/W				
			4000K	2560	128 lm/W				
			5000K	2580	129 lm/W				
		15W	3500K	1950	130 lm/W				
			4000K	1965	131 lm/W				
			5000K	1980	132 lm/W				
KT-SWLED45PS-4A-8CSA-VDIM-P	4ft	45W	3500K	5490	122 lm/W	120-277V	0-10V	Yes	>80
			4000K	5535	123 lm/W				
			5000K	5580	124 lm/W				
		35W	3500K	4480	128 lm/W				
			4000K	4515	129 lm/W				
			5000K	4550	130 lm/W				
		30W	3500K	3930	131 lm/W				
			4000K	3960	132 lm/W				
			5000K	3990	133 lm/W				

Mounts and Brackets FOR POWER AND COLOR SELECT MODELS

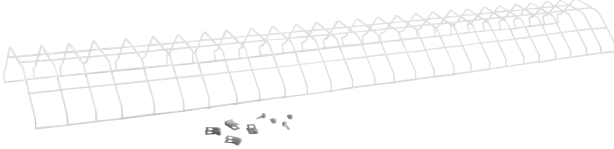CATALOG NUMBER	DESCRIPTION	
KT-SWLED-WG-1-KIT	Wire guard for 2A LED stairwell fixture	
KT-SWLED-WG-2-KIT	Wire guard for 4A LED stairwell fixture	

Shop Light

Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI	AVAILABLE CCTS
KT-SHLED23-48-840	4'	23W	2600	113 lm/W	120V	N/A	No	>80	4000K
KT-SHLED40-48-840 /G2	4'	40W	4000	100 lm/W	120V	N/A	No	>80	4000K



Tube Ready Strips

Standard

CATALOG NUMBER	NOMINAL SIZE	NUMBER OF LAMPS	LAMP TYPE	MAX LAMP WATTAGE	WIRING TYPE
KT-DDSLEDT8-4-1L	4'	1	4' T8 lamps, G13 base	25W	UL Type B, Single Ended
KT-DDSLEDT8-4-2L	4'	2	4' T8 lamps, G13 base	25W	UL Type B, Single Ended
KT-DDSLEDT8-8-2L	8'	2	4' T8 lamps, G13 base	25W	UL Type B, Single Ended
KT-DDSLEDT8-8-4L	8'	4	4' T8 lamps, G13 base	25W	UL Type B, Single Ended
KT-DDSLEDFA8-8-2L	8'	2	8' T8 lamps, FA8 base	43W	UL Type B, Double Ended
KT-DDSLEDRI7D-8-2L	8'	2	8' T8 lamps, R17d base	54W	UL Type B, Double Ended

*Tubes sold separately.

Mounts and Brackets FOR STANDARD OPTIONS

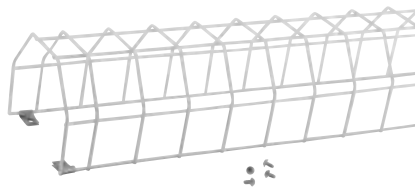CATALOG NUMBER	DESCRIPTION	
KT-DDSLEDT8-WG-1-KIT	Wire guard for LED tube ready strip fixtures, option 1 fits KT-DDSLEDT8-4-1L and KT-DDSLEDT8-4-2L strip fixture	
KT-DDSLEDT8-WG-2-KIT	Wire guard for LED tube ready strip fixtures, option 2 fits KT-DDSLEDT8-8-4L-DP strip fixture	
KT-DDSLEDT8-VH-KIT	V-hook and chain kit for T8LED tube ready strip fixtures, includes (2) V-hooks and (2) chains 40 in long	

Tube Ready High Bays

Standard



CATALOG NUMBER	NOMINAL SIZE	NUMBER OF LAMPS	LAMP TYPE	MAX LAMP WATTAGE	WIRING TYPE
KT-DDHBLEDT8-4-4L	4'	4	4' T8 lamps, G13 base	25W	UL Type B, Single Ended
KT-DDHBLEDT8-4-6L	4'	6	4' T8 lamps, G13 base	25W	UL Type B, Single Ended

*Tubes sold separately.

Sensors FOR STANDARD OPTIONS

CATALOG NUMBER	DESCRIPTION	
KTS-PIR2-UV-KO	PIR occupancy sensor with adjustable controls for time delay and daylighting, standby dimming levels	

Mounts and Brackets FOR STANDARD OPTIONS

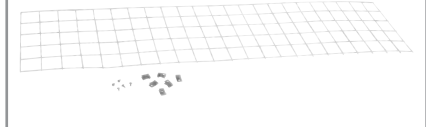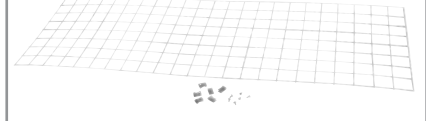CATALOG NUMBER	DESCRIPTION	
KT-DDHBLEDT8-WG-4L-KIT	Wire guard for Direct Drive tube ready 4L high bay fixture, includes mounting hardware	
KT-DDHBLEDT8-WG-6L-KIT	Wire guard for Direct Drive tube ready 6L high bay fixture, includes mounting hardware	





Tube Ready Prismatic Troffers

Standard

CATALOG NUMBER	NOMINAL SIZE	NUMBER OF LAMPS	LAMP TYPE	MAX LAMP WATTAGE	WIRING TYPE
KT-DDPTLEDT8-22-2L	2'x2'	2	2' T8 lamps, G13 Base	25W	UL Type B, Single Ended
KT-DDPTLEDT8-24-2L	2'x4'	2	4' T8 lamps, G13 Base	25W	UL Type B, Single Ended
KT-DDPTLEDT8-24-3L	2'x4'	3	4' T8 lamps, G13 Base	25W	UL Type B, Single Ended
KT-DDPTLEDT8-24-4L	2'x4'	4	4' T8 lamps, G13 Base	25W	UL Type B, Single Ended

*Tubes sold seperately.

Mounts and Brackets FOR STANDARD OPTIONS

CATALOG NUMBER	DESCRIPTION	
KT-CBLED-RMF-22-KIT	Recessed mount flange kit for 2x2 center basket fixtures and tube ready troffers	
KT-CBLED-RMF-24-KIT	Recessed mount flange kit for 2x4 center basket fixtures and tube ready troffers	
KT-CBLED-SM-22-KIT	Surface mount kit for 2x2 LED center basket troffers and tube ready troffers	
KT-CBLED-SM-24-KIT	Surface mount kit for 2x4 LED center basket troffers and tube ready troffers	

Tube Ready Wraps

Standard

CATALOG NUMBER	NOMINAL SIZE	NUMBER OF LAMPS	LAMP TYPE	MAX LAMP WATTAGE	WIRING TYPE
KT-DDWLEDT8-4-2L	4'	2	4' T8 lamps, G13 base	25W	UL Type B, Single Ended
KT-DDWLEDT8-4-4L	4'	4	4' T8 lamps, G13 base	25W	UL Type B, Single Ended

*Tubes sold seperately.

Ordering a **free** sample is always easy.



keystonetech.com/samples



samples@keystonetech.com



800.464.2680




Self-Service Lighting Layout Tool

Keystone now offers an online self-service tool to help you take the next step in bringing your project to life.

Our easy-to-use application instantly renders lighting layouts for simple space types. Simply add room size and select your fixture, and the application helps determine how many fixtures you need and what types of lamps are best for your applications to save the maximum amount of energy, all within budget.

As always, we continue to offer our complimentary lighting layout services and are happy to consult and assist whenever needed.

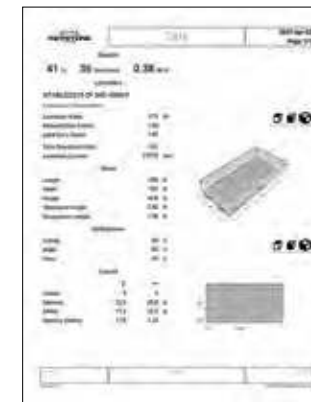

Visit: keystonetech.com/lighting-layout

The Keystone Difference

Our mission at Keystone is to change the way you think about lighting. We believe that lighting should be simple, hassle-free, and enjoyable. Keystone is Light Made Easy®.



**Fast
Quotes**



**Quick
Delivery**



**Trusted Brand
Since 1945**



**Complimentary
Lighting Layouts**



**No Questions Asked
Return Policy**



**Free
Samples**

Keystone Technologies Philadelphia, PA 800.464.2680 keystonetech.com

LAMPS | FIXTURES | POWER SUPPLIES | CONTROLS