



CC1322MTP

T8 ELECTROMAGNETIC BALLAST



DESCRIPTION

1 x 13W CFL | 120 Input Voltage | Normal Power Factor | Preheat Start

STARTING METHOD: Preheat
LAMP CONNECTION: Series
INPUT VOLTAGE: 120VAC + 5% -10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years


PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F15T8	1	120	16	0.28	.55	≤1.70	0.84	≤15	≤1.60
F18T8	1	120	16	0.24	.39	≤1.70	0.6	≤15	≤1.60
F15T12	1	120	16	0.29	.51	≤1.70	0.84	≤15	≤1.60
F20T12	1	120	16	0.25	.39	≤1.70	0.64	≤15	≤1.60
CFT13W/GX23	1	120	16	0.24	.61	≤1.70	0.89	≤15	≤1.60

WIRING DIAGRAM

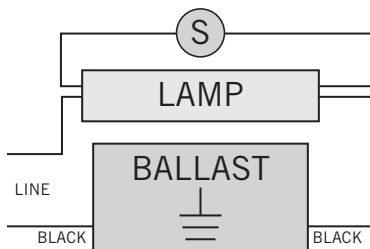



CC1322MTP

T8 ELECTROMAGNETIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	3.06"
	WIDTH	1.74"
	HEIGHT	1.34"
	MOUNTING	2.75"
	CASE STYLE	B2

STANDARD LEAD LENGTHS*

BLACK	2 x 11.5"
--------------	-----------

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
CC1322MTP-CP	Carton Pack	TBD	Active

CATALOG NUMBER BREAKDOWN

CC1322MTP-CP

