



XFIT

KT-VTLED54-8A-8XX-VDIM-P

VAPOR TIGHT FIXTURE

DESCRIPTION

8' 54W LED Vapor Tight Fixture | 120-277V Input | 0-10V Dimming | Premium Series

APPLICATION

Used for commercial and industrial rugged or outdoor applications



10 YEAR
LIMITED WARRANTY



PRODUCT FEATURES


- Traditional design, narrow body, Vapor Tight fixture, suitable for rugged, demanding applications
- Powered by Keystone 120-277V, 0-10V dimming LED driver, 10% minimum
- Smooth, diffused, impact resistant polycarbonate lens provides even lit appearance
- Stainless steel, tamper resistant lens clips (screws not included)
- Includes mounting hardware, cordgrip, and hole plug for out-of-the-box installation
- Compatible with Keystone motion and occupancy sensors, featuring high-end trim and daylight sensing.
- Compatible with Keystone SmartSafe emergency backups, max of 30°C ambient operating temperature with emergency pack installed
- NEMA 4X rated enclosure
- IP66 Ingress Protection
- IK10 Impact Rating
- Ambient operating temperature:-40°C/-40°F to 50°C/122°F
- LED chip lifetime: L70 >100,000 hours @ 25°C/77°F ambient fixture temperature
- PF: > 0.95
- THD: < 20%
- UL Certified for Wet Locations
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment, Splash Zone (Not for Direct Food Zone)
- DesignLights Consortium® (DLC) qualified product. Not all product variations listed on this page are DLC premium. Visit <https://qpl.designlights.com> to confirm if the product meets the DLC Standard or Premium designation

PRODUCT SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-VTLED54-8A-840-VDIM-P	4000K	8 ft.	120-277V	54W	> 82.0	6,910	128 lm/W
KT-VTLED54-8A-850-VDIM-P	5000K	8 ft.	120-277V	54W	> 82.0	7,020	130 lm/W

PHOTOMETRIC SPECIFICATIONS

LUMINOUS INTENSITY DISTRIBUTION

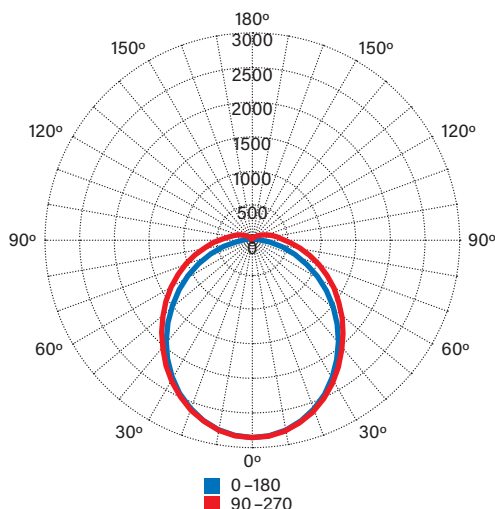

ZONAL LUMEN SUMMARY*

Zone	Flux (Lumens)	% Luminaire	Zone	Flux (Lumens)	% Luminaire
0-20	815.18 lm	11.80%	60-80	1,378.78 lm	19.90%
0-30	1,716.37 lm	24.80%	70-80	564.04 lm	8.10%
0-40	2,785.33 lm	40.20%	80-90	318.47 lm	4.60%
0-60	4,888.44 lm	70.50%	90-110	267.10 lm	3.90%
0-80	6,267.22 lm	95.00%	90-120	313.24 lm	4.50%
0-90	6,585.69 lm	92.00%	90-130	330.94 lm	4.80%
10-90	6,373.56 lm	83.69%	90-150	339.30 lm	4.90%
20-40	1,970.15 lm	28.40%	90-180	344.30 lm	5.00%
20-50	3,068.31 lm	44.30%	110-180	7712	1.10%
40-70	2,917.85 lm	42.10%	0-180	6,930.00	100.00%

* Calculated



KT-VTLED54-8A-8XX-VDIM-P

VAPOR TIGHT FIXTURE

ACCESSORIES

SENSORS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/MW3	KTS-MW3-UV-KO-K2	Microwave Multifunction Occupancy/Daylight Sensor Kit, Includes 120-277V input to 12V DC convertor, IP65 12V input sensor head, nomex sleeve, extension neck	843654134352	TBV-76




Microwave Sensor Kit
KTS-MW3-UV-KO-K2

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/515P6	KT-CS-515P-6-18/3	Cord set for high bay; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26
	/L715P10	KT-CS-L715P-10-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140131	SFV-88
	/L615P10	KT-CS-L615P-10-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140148	ZQS-05
	/L515P10	KT-CS-L515P-10-16/3	Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140155	GVH-22
	/L715P6	KT-CS-L715P-6-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140162	DVU-44
	/L615P6	KT-CS-L615P-6-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140179	LCW-66
	/L515P6	KT-CS-L515P-6-16/3	Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140186	POC-82
	/NP10	KT-CS-NP-10-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 10' SJTOW cable; 16/3 wire	843654140193	YOH-90
	/NP6	KT-CS-NP-6-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 6' SJTOW cable; 16/3 wire	843654140216	HUB-73
	/NP15	KT-CS-NP-15-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 15' SJTOW cable; 16/3 wire	843654140209	EYD-18



Cord Sets

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
Note: For cord sets not listed here, please contact your Keystone sales rep.

(Accessories continued on next page)



KT-VTLED54-8A-8XX-VDIM-P


VAPOR TIGHT FIXTURE

ACCESSORIES (continued)

EMERGENCY BACKUP

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/EM5	KT-EMRG-LED-5C-500	5W, 500 lumen Smart Safe emergency backup	843654103099	JTR-48
	/EM12	KT-EMRG-LED-12C-1200	12W, 1200 lumen Smart Safe emergency backup	843654103112	OJQ-32

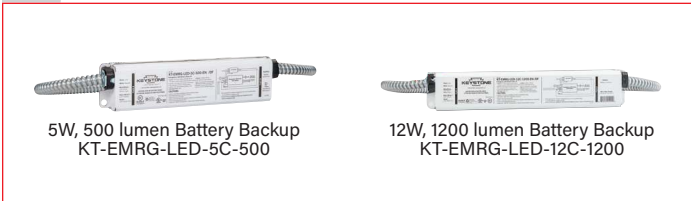

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
 † Factory installation of emergency backup units will automatically include any relevant mounting bracket.

MOUNTS AND BRACKETS

Field-Installable / Field-Use ONLY (purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-VTLED-45SM-1-KIT	45° steel surface mount kit for all Keystone vapor tight fixtures	843654123455	JDN-49
KT-VTLED-TPSCREW-KIT	Screws for tamper-proofing vapor tight fixtures. Includes 14 screws	NA	NA




(Accessories continued on next page)



KT-VTLED54-8A-8XX-VDIM-P

VAPOR TIGHT FIXTURE

PHYSICAL SPECIFICATIONS

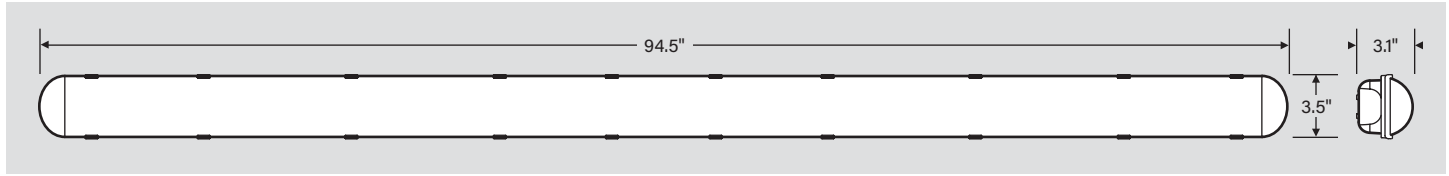

ORDERING INFORMATION

CATALOG NUMBER	PACK QUANTITY	UPC	EASY CODE	DLC PRODUCT ID
KT-VTLED54-8A-840-VDIM-P-CP	4	843654122212	EVF-54	PB3AWQR2
				PKWYYPWB
				PVHVEBUY
KT-VTLED54-8A-850-VDIM-P-CP	4	843654122229	DVB-47	P6F564ST
				PNNFSWBL
				PL2VOWHA

CATALOG NUMBER BREAKDOWN

KT-VTLED54-8A-8XX-VDIM-P

- | | | | | | | | | | |
|--------------------------------|----------------------------------|------------------|----------------------------|--------------------|-----------------|----------------------------|------------------------|-------------------------|--------------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 1 Keystone Technologies | 2 Vapor Tight LED Fixture | 3 Wattage | 4 8' Nominal Length | 5 Lamp Type | 6 80 CRI | 7 Color Temperature | 8 0-10V Dimming | 9 Premium Series | 10 Sensor Options |

	No Option
/MW3	Microwave Sensor Included

ORDERING EXAMPLES

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*
KT-VTLED54-8A-8XX-VDIM-P/MW3/NP10/EM5

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*
KT-VTLED54-8A-8XX-VDIM-P/MW3/EM5

FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES*
KT-VTLED54-8A-8XX-VDIM-P/MW3/NP10

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY
KT-VTLED54-8A-8XX-VDIM-P/MW3

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES
KT-VTLED54-8A-8XX-VDIM-P

KEYSTONE FIXTURE	
CATALOG NUMBER	
KT-VTLED54-8A-8XX-VDIM-P	

SENSORS	
SUFFIX	CATALOG NUMBER
<input checked="" type="checkbox"/> /MW3	KTS-MW3-UV-KO-K2

CORD SETS	
SUFFIX	CATALOG NUMBER
<input checked="" type="checkbox"/> /NP10	KT-CS-NP-10-16/3

EMERGENCY BACKUP	
SUFFIX	CATALOG NUMBER
<input checked="" type="checkbox"/> /EM5	KT-EMRG-LED-5C-500

*When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.
Note: All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.