



KT-EMRG-700-SL /B

EMERGENCY BALLAST

5YEAR WARRANTY 



PRODUCT FEATURES

INPUT VOLTS: 120/277V, 60Hz	LIGHT OUTPUT: 700 Lumen	BATTERY: 6V Sealed NiCD
	ILLUMINATION TIME: 90 Minutes	WARRANTY: 5 Years

OPERATING DETAILS

- For use in new or existing fixtures, with or without an AC ballast, where emergency lighting is needed.
- Operates one or two lamps in the emergency mode.
- 2-in-1 LED indicator light and push-to-test switch (for mandated code compliance testing).
- Internal battery automatically connects to the fluorescent lamp for minimum 90 minute emergency illumination via an internal solid-state transfer switch.
- A discharged battery completely recharges in 24 hours, via a fully automatic solid-state, two-rate charger.
- Features Time Delay Technology which helps to overcome end-of-life circuit protection.
- Suitable for Sealed and Gasketed Fixtures.

LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic, standard and dimming AC ballasts.
- Operates the following lamps under emergency power:

	T5 (W)		T5HO (W)	T8 (W)		T12 (W)	4-Pin CFL (W)	4-Pin Long CFL (W)	4-Pin GR10q (W)	Circline (W)		
	1	2	1	1	2	1	1	1	1	T9	T5	
No. of Lamps	1	2	1	1	2	1	1	1	1	1	2	1
Wattage	21-35	21	24-39	17-40	17-25	30-40	42	36-50	38	20-40	20-32	40-55

U-Bend (W)				
No. of Lamps	T8		T12	
	1	2	1	2
Wattage	32	32	34,40	34



KT-EMRG-700-SL /B

EMERGENCY BALLAST


INITIAL LUMEN OUTPUT

LAMP TYPE	INITIAL LUMENS	
	1-Lamp	2-Lamp
T5 21W	575	650
T5 28W	675	N/A
T5HO 24W	650	N/A
T5HO 39W	700	N/A
T8 17W	575	625
T8 32W	650	N/A
T12 30W	500	N/A
T12 40W	625	N/A

LAMP TYPE	INITIAL LUMENS	
	1-Lamp	2-Lamp
4-Pin CFL 42W	675	N/A
4-Pin Long CFL 36W	600	N/A
4-Pin Long CFL 50W	650	N/A
4-Pin GR10q 38W	650	N/A
Circular T9 32W	450	550
Circular T9 40W	550	N/A
Circular T5 55W	700	N/A
U-Bend T8 32W	575	650
U-Bend T12 34W	550	600

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS

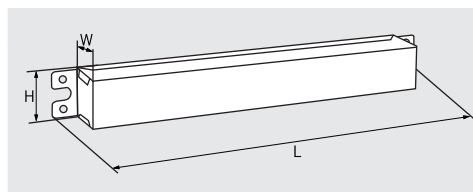

LENGTH	11.70"
WIDTH	2.00"
HEIGHT	1.18"
CASE MATERIAL: Galvanized Steel (Low Profile Design)	

MOUNTING

- UL listed for factory or field installation. Suitable for damp location.
- Can be mounted inside, on top, or remote from the fixture.*
- Designed to be used in both switched and unswitched fixtures.

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the AC ballast manufacturer. The maximum allowable remote mounting distance is 50 feet. The maximum mounting height is 8 feet.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-EMRG-700-SL /B-DP	Distributor Pack	1	Quick Ship

CATALOG NUMBER BREAKDOWN

KT-EMRG-700-SL /B-DP

Keystone Technologies	Emergency Ballast	700 Lumen	Low Profile Case	Manufacturing Revision	Packaging Style
--------------------------	----------------------	--------------	---------------------	---------------------------	--------------------

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State codes.

Keystone Technologies • 1390 Welsh Road, North Wales, PA 19454 • Phone (800) 464-2680 • Fax (888) 966-0556 • www.kestonetech.com