





BACKLIT LED PANEL LIGHT

DESCRIPTION

1' × 4' Backlit LED Panel Light | 30W | 120-277V Input | 0-10V Dimming











PRODUCT FEATURES

- Aluminum frame featuring stepped-edge design detail and gloss
 Suitable for damp locations white paint for improved aesthetics
- Backlit style design; fits standard T-grid ceilings
- Suitable for recessed- or surface-mount (with optional accessories)*
- LED, offering optimal light diffusion and consistent surface illumination, with no risk of yellowing over product lifetime
- * For use in non-fire rated installations only


- Powered by Keystone 0-10V dimmable LED driver with built-in junction box
- Compatible with Keystone SmartSafe LED emergency backup
- Over 50% energy savings compared to traditional fluorescent troffers
- Construction features precise optical lenses over each individual Operating temperature range: -20°C/-4°F to 40°C/104°F
 - Available with Keystone's Smart Loop Bluetooth™ mesh wireless system, with features such as high-end trim, grouping, occupancy/ vacancy sensing, and scheduling.

PERFORMANCE SPECIFICATIONS


Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	Efficacy	CRI	Power Factor	UGR	Lifetime
KT-BPLED30-14-835-VDIM-P /G2	120-277V	30W	3500K	3750	125 lm/W	>80	> 0.9	< 19	50,000 Hours
KT-BPLED30-14-840-VDIM-P /G2	120-277V	30W	4000K	3750	125 lm/W	>80	> 0.9	< 19	50,000 Hours
KT-BPLED30-14-850-VDIM-P /G2	120-277V	30W	5000K	3750	135 lm/W	>80	> 0.9	< 19	50,000 Hours

PHOTOMETRIC SPECIFICATIONS





POLAR CANDELA PLOT



ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-60	2,887.7	76.7%
60-90	873.9	23.2%
0-90	3,765.3	100%








BACKLIT LED PANEL LIGHT

PHYSICAL SPECIFICATIONS

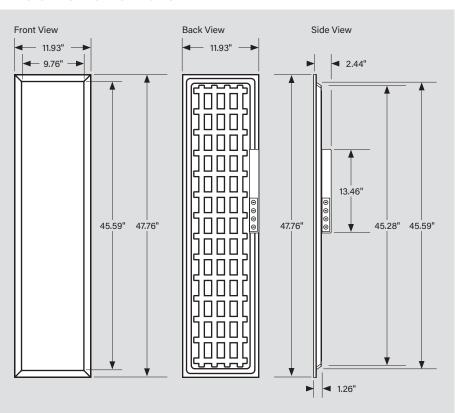


WEIGHT INFORMATION

1 Piece	1 Carton
6.20 lbs.	12.40 lbs.

EXPLODED VIEW

CONSTRUCTION FEATURES

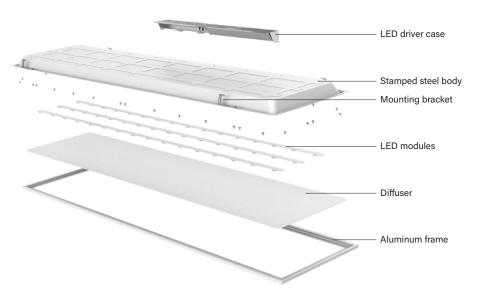







BACKLIT LED PANEL LIGHT

ACCESSORIES

SENSORS

Factory-Installable OR Field-Installable (field-installable purchased senarately)

Factory-installable OR Field-installable (field-installable purchased separately)						
\checkmark	SUFFIX*	CATALOG NUMBER	DESCRIPTION		UPC	EASY CODE
	/FC1-PIR	KTSL-FC1-UV-KO-PIR	Bluetooth mesh wireless fixture controller for SmartLoop sy with remote mount PIR motion sensor with daylight harvest and high-end trim; 120–277V; 3A max load with 0–10V dimm	ting (LOP	843654129259	MGZ-59
		rt Loop PIR Sensor sL-FC1-UV-KO-PIR		Note: Keystone Sm Lighting Control sol such as complete w trim, occupancy/va- scheduling. To learr visit http://www.key	vireless control, zon	na, hiah-end

^{*} For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

Bluetooth Wireless Keypad KTSL-WS1-B-SG /G2

Field-Installabl	le / Field-Use ONLY (purchas	sed separately)		
	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	KTSL-WS1-B-SG /G2	Bluetooth mesh wireless battery powered wall switch for SmartLoop system	843654141695	FYH-31
Auto				

(Accessories continued on next page)







BACKLIT LED PANEL LIGHT


ACCESSORIES (continued)

CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

\checkmark	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/515P-6	KT-CS-515P-6-18/3	Cord set for high bay; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26
	/L715P-10	KT-CS-L715P-10-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140131	SFV-88
	/L615P-10	KT-CS-L615P-10-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140148	ZQS-05
	/L515P-10	KT-CS-L515P-10-16/3	Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140155	GVH-22
	/L715P-6	KT-CS-L715P-6-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140162	DVU-44
	/L615P-6	KT-CS-L615P-6-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140179	LCW-66
	/L515P-6	KT-CS-L515P-6-16/3	Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140186	POC-82
	/MC-6-3	KT-MC-NP-6-18/3	MC cable whip for high bays; no plug; inners 1/2" strip on both ends; 6' metal-clad cable; 18/3 wire	843654134505	EYP-82
	/MC-6-5	KT-MC-NP-6-18/5	MC cable whip for high bays; no plug; inners 1/2" strip on both ends; 6' metal-clad cable; 18/5 wire (dimming wires included)	843654134512	CBU-56
	/NP-10	KT-CS-NP-10-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 10' SJTOW cable; 16/3 wire	843654140193	YOH-90
	/NP-6	KT-CS-NP-6-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 6' SJTOW cable; 16/3 wire	843654140216	HUB-73
	/NP-15	KT-CS-NP-15-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 15' SJTOW cable; 16/3 wire	843654140209	EYD-18





(Accessories continued on next page)







BACKLIT LED PANEL LIGHT

ACCESSORIES (continued)

5W, 500 lumen Battery Backup KT-EMRG-LED-5C-500-EN /DF

EMERGENCY BACKUP

Factory-Installable OR Field-Installable (field-installable purchased separately)

	, ,						
\checkmark	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE		
	/EM5 [†]	KT-EMRG-LED-5C-500-EN /DF	5W, 500 lumen Smart Safe emergency backup with dual flex cables	843654132433	RAR-74		
	/EM12 [†]	KT-EMRG-LED-12C-1200-EN /DF	12W, 1200 lumen Smart Safe emergency backup with dual flex cables	890949019900	YCV-23		

12W, 1200 lumen Battery Backup KT-EMRG-LED-12C-1200-EN /DF

Field-Installable / Field-Use ONLY (purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-BPLED-EM-14-KIT	Emergency LED backup mounting bracket kit for LED high bay fixtures	843654128047	EIG-03



(Accessories continued on next page)

^{*} For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
† Factory installation of emergency backup units will automatically include any relevant mounting bracket.







KT-BPLED30-14-8XX-VDIM-P/G2 BACKLIT LED PANEL LIGHT

ACCESSORIES (continued)

MOUNTS AND BRACKETS

Factory-Installable OR Field-Installable (field-installable purchased separately)



^{*} For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

Field-Installable / Field-Use ONLY (purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-BPLED-SM-14-KIT /G2	Surface Mount kit for 1 × 4 backlit panels	843654134543	CGY-52
KT-BPLED-CABLE-KIT	Aircraft cable hanging kit for LED high bay fixtures	843654133423	JLB-77









STEP-DOWN TRANSFORMERS

Fact	Factory-Installable OR Field-Installable (field-installable purchased separately)					
\checkmark	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE	
	/480 ^{†‡}	KTAT-250-480-277 /SF	Fully enclosed, single flex step-down transformer for LED high bay fixtures (250VA or lower)	843654102931	XIM-17	
1	Step-	Down Transformer 7-250-480-277 /SF				

^{*} For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
† Factory installation of step-down transformer units will automatically include any relevant mounting bracket.
† Step-down transformers cannot be ordered in conjunction with standard SJTOW cord set options (contact Keystone sales rep for available custom options if needed).







BACKLIT LED PANEL LIGHT

FIXTURE ORDERING INFORMATION

CATALOG NUMBER	CARTON QTY.	UPC	EASY CODE
KT-BPLED30-14-835-VDIM-P /G2	2	843654146683	WPN-31
KT-BPLED30-14-840-VDIM-P /G2	2	843654146690	AZY-03
KT-BPLED30-14-850-VDIM-P /G2	2	843654146706	AJQ-21

FIXTURE CATALOG NUMBER BREAKDOWN

KT-BPLED30-14-8XX-VDIM-P /G2

- 1 Keystone Technologies
- 2 Backlit Panel Light LED Fixture
- 3 Wattage
- 4 2' × 4' Nominal Size
- 5 80 CRI

- 6 Color Temperature
- 7 0-10V Dimming
- 8 Premium DLC
- 9 Second Generation
- 10 Additional Ordering Options (See details and examples below)

10 Additional Ordering Options

(blank)	No sensor included
/FC1-PIR	Occupancy sensor included

ORDERING EXAMPLES

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*

KT-BPLED30-14-840-VDIM-P /G2/FC1-PIR/L715P-6/EM5/JBOX

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*

KT-BPLED30-14-840-VDIM-P/G2/FC1-PIR/EM5/JBOX/480

FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES*

KT-BPLED30-14-840-VDIM-P /G2/FC1-PIR/JBOX

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

KT-BPLED30-14-840-VDIM-P /G2/FC1-PIR

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

KT-BPLED30-14-840-VDIM-P

KEYSTONE FIXTURE

CATALOG NUMBER

KT-BPLED30-14-840-VDIM-P /G2

SENSORS

\checkmark	SUFFIX	CATALOG NUMBER
✓	/FC1-PIR	KTSL-FC1-UV-KO-PIR

CORD SETS

\checkmark	SUFFIX	CATALOG NUMBER
✓	/L715P-6	KT-CS-L715P-6-16/3

EMERGENCY BACKUP

	-	
\checkmark	SUFFIX	CATALOG NUMBER
\checkmark	/EM5	KT-EMRG-LED-5C-500-EN /DF

MOUNTS AND BRACKETS

\checkmark	SUFFIX	CATALOG NUMBER
\checkmark	/JBOX	KT-BPLED-JBOX-2

STEP-DOWN TRANSFORMERS

\checkmark	SUFFIX	CATALOG NUMBER
✓	/480	KTAT-250-480-277 /SF

Note: Step-down transformers cannot be ordered in conjunction with standard SJTOW cord set options (contact Keystone sales rep for available custom options if needed).

^{*} When ordering more then one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.

Note: All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.