

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE



LED Under Cabinet Fixture, 120V Input

### PRODUCT FEATURES

- Features Adjustable CCT. Adjust CCT between 2700/3000/3500/4000/5000K
- Powered by TRIAC dimming LED driver, 10–100% dimming
- Tool-less access to wireway for easy installation
- Knockouts available at the back, side, and rear for versatile installation options
- UL Listed for Dry and Damp Locations
- Frosted Polycarbonate lens
- Ambient operating temperature: –20°C/–4°F to 45°C/113°F
- LED lifetime: L70 >50,000 hours @ 25°C fixture ambient
- FCC Part 15, Subpart B, Class B
- Available in White and Bronze Finishes†



### PERFORMANCE SPECIFICATIONS OVERVIEW

Catalog Number	Wattage	Adjustable CCT	Max Lumens*	Efficacy	Input Voltage	Dimming	CRI	Lifetime
UCLED5-9A-9CSF	5W	2700K 3000K 3500K 4000K 5000K	390	78 lm/W	120V	Forward Phase	>90	50,000 hrs
UCLED5-12A-9CSF	5W		440	88 lm/W				
UCLED9-18A-9CSF	9W		710	79 lm/W				
UCLED9-24A-9CSF	9W		770	86 lm/W				
UCLED14-34A-9CSF	14W		1,190	85 lm/W				
UCLED20-42A-9CSF	20W		1,720	86 lm/W				
UCLED20-46A-9CSF	20W		1,700	85 lm/W				


\* Nominal Values above represent output when set to 5000K, please see page 2 for detailed output numbers.

† Bronze finish available for special order; lead times apply.

### KEY FEATURES

Undercabinet fixture is equipped with field adjustable Color Select technology and built-in power switch.

1. Power Switch located on front of fixture for accessibility.
2. Adjustable switch to select desired setting of color temperature.

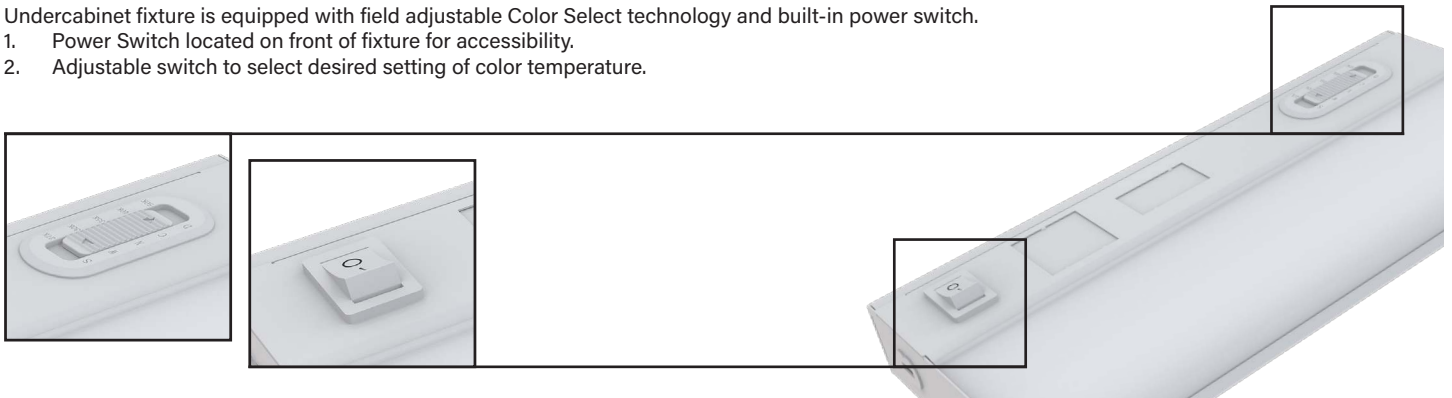

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE


### PERFORMANCE SPECIFICATIONS DETAILED

Catalog Number	Length	Wattage	Adjustable CCT	Lumens	Efficacy
UCLED5-9A-9CSF	9"	5W	2700K	330	66 lm/W
			3000K	365	73 lm/W
			3500K	410	82 lm/W
			4000K	425	85 lm/W
			5000K	390	78 lm/W
UCLED5-12A-9CSF	12"	5W	2700K	390	78 lm/W
			3000K	415	83 lm/W
			3500K	450	90 lm/W
			4000K	460	92 lm/W
			5000K	440	88 lm/W
UCLED9-18A-9CSF	18"	9W	2700K	675	75 lm/W
			3000K	729	81 lm/W
			3500K	792	88 lm/W
			4000K	792	88 lm/W
			5000K	711	79 lm/W
UCLED9-24A-9CSF	24"	9W	2700K	684	76 lm/W
			3000K	738	82 lm/W
			3500K	792	88 lm/W
			4000K	819	91 lm/W
			5000K	774	86 lm/W
UCLED14-34A-9CSF	34"	14W	2700K	1,050	75 lm/W
			3000K	1,162	83 lm/W
			3500K	1,260	90 lm/W
			4000K	1,260	90 lm/W
			5000K	1,190	85 lm/W
UCLED20-42A-9CSF	42"	20W	2700K	1,520	76 lm/W
			3000K	1,640	82 lm/W
			3500K	1,760	88 lm/W
			4000K	1,820	91 lm/W
			5000K	1,720	86 lm/W
UCLED20-46A-9CSF	46"	20W	2700K	1,500	75 lm/W
			3000K	1,660	83 lm/W
			3500K	1,800	90 lm/W
			4000K	1,800	90 lm/W
			5000K	1,700	85 lm/W

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE


### PHOTOMETRIC SPECIFICATIONS (UCLED5-9A-9CSF)

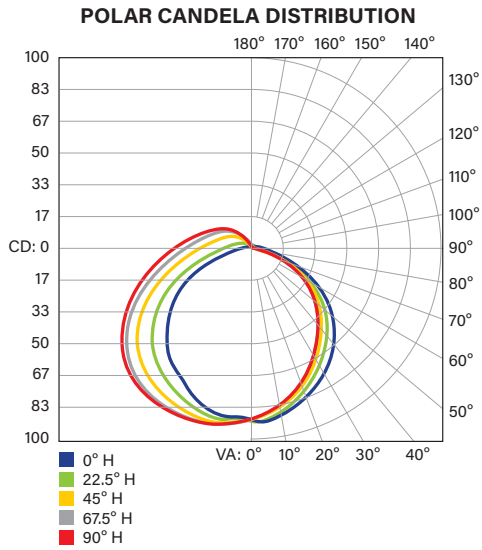

### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	71.1	21.2%
0-40	118.0	35.2%
0-60	216.5	64.6%
60-90	83.0	24.8%
70-100	54.2	16.2%
90-120	25.3	7.5%
0-90	299.5	89.4%
90-180	35.6	10.6%
0-180	335.1	100.0%

### PHOTOMETRIC SPECIFICATIONS (UCLED5-12A-9CSF)

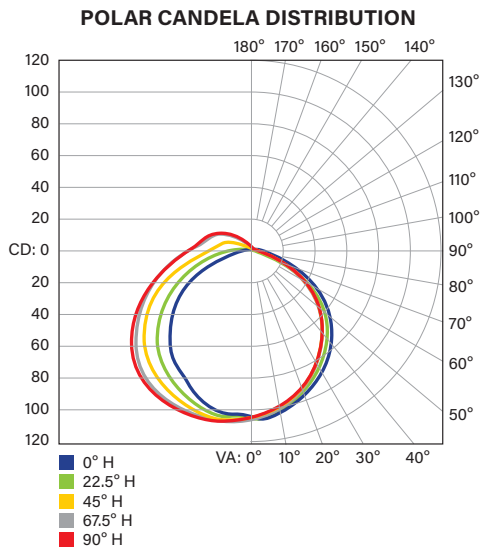


### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	84.5	21.2%
0-40	140.3	35.9%
0-60	257.1	65.8%
60-90	98.4	25.2%
70-100	63.9	16.3%
90-120	28.0	7.2%
0-90	355.5	91.0%
90-180	35.3	9.0%
0-180	390.9	100.0%

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE


### PHOTOMETRIC SPECIFICATIONS (UCLED9-18A-9CSF)

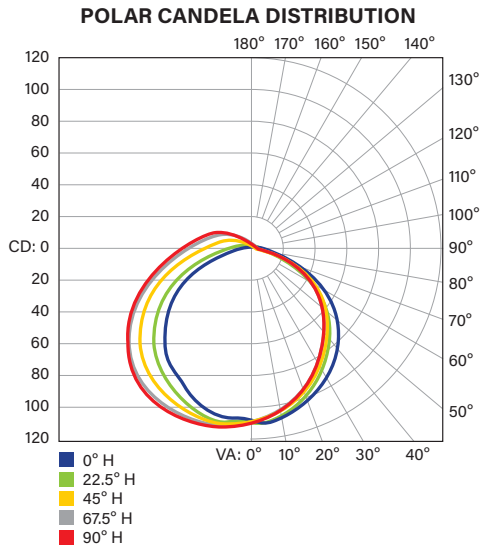

**ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-30	147.3	21.8%
0-40	244.4	36.2%
0-60	447.3	66.2%
60-90	168.2	24.9%
70-100	107.7	15.9%
90-120	46.6	6.9%
0-90	615.5	91.1%
90-180	60.2	8.9%
0-180	675.7	100.0%

### PHOTOMETRIC SPECIFICATIONS (UCLED9-24A-9CSF)

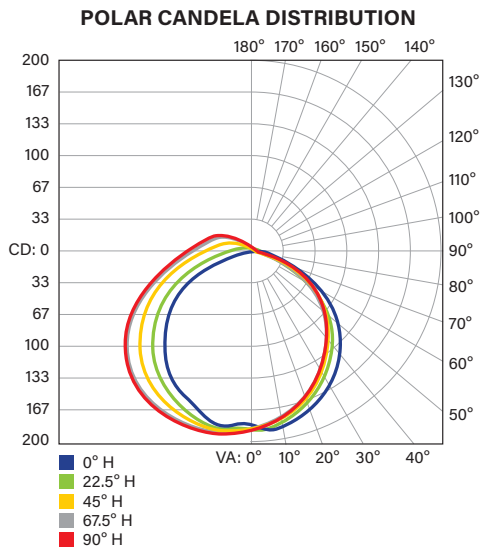

**ZONAL LUMEN SUMMARY**


Zone	Lumens	% Luminaire
0-30	149.3	21.7%
0-40	247.7	36.1%
0-60	453.7	66.1%
60-90	171.0	24.9%
70-100	109.7	16.0%
90-120	47.5	6.9%
0-90	624.6	91.0%
90-180	62.1	9.0%
0-180	686.7	100.0%

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE

### PHOTOMETRIC SPECIFICATIONS (UCLED14-34A-9CSF)

**POLAR CANDELA DISTRIBUTION**

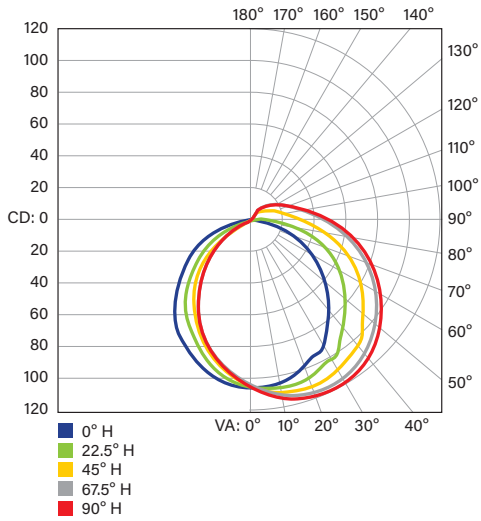


**ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-30	241.9	21.6%
0-40	400.6	35.8%
0-60	727.9	65.0%
60-90	287.6	25.7%
70-100	195.1	17.4%
90-120	82.1	7.3%
0-90	1015.6	90.7%
90-180	104.2	9.3%
0-180	1119.8	100.0%

### PHOTOMETRIC SPECIFICATIONS (UCLED20-42A-9CSF)

**POLAR CANDELA DISTRIBUTION**

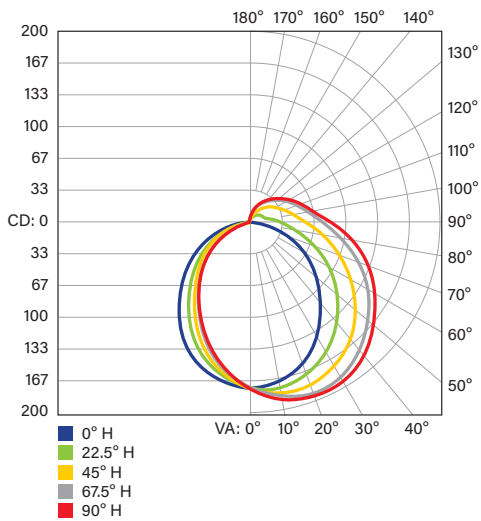

**ZONAL LUMEN SUMMARY**


Zone	Lumens	% Luminaire
0-30	309.0	20.5%
0-40	512.5	33.9%
0-60	940.0	62.2%
60-90	388.2	25.7%
70-100	269.3	17.8%
90-120	133.5	8.8%
0-90	1328.2	87.9%
90-180	182.6	12.1%
0-180	1510.8	100.0%

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE

### PHOTOMETRIC SPECIFICATIONS (UCLED20-46A-9CSF)

**POLAR CANDELA DISTRIBUTION**

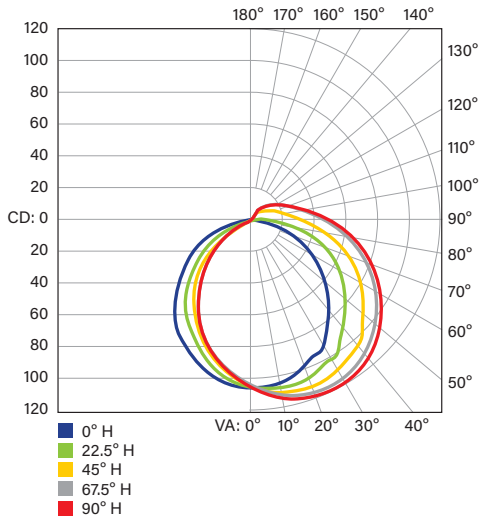



**ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-30	371.5	21.1%
0-40	614.9	35.1%
0-60	1122.5	64.1%
60-90	447.3	25.5%
70-100	301.7	17.2%
90-120	138.1	7.9%
0-90	1569.8	89.6%
90-180	181.3	10.4%
0-180	1751.1	100.0%

# UCLEDXX-XXA-9CSF

## LED UNDER CABINET FIXTURE

### PHYSICAL SPECIFICATIONS

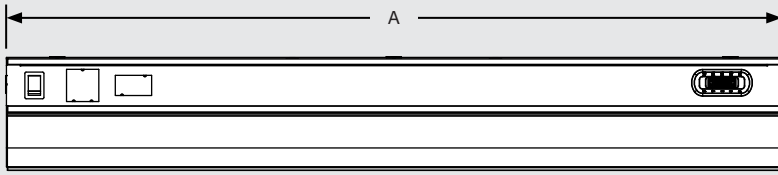

Catalog Number	A (Length)	B (Height)	C (Width)
UCLED5-9A-9CSF	9"	1.13"	3.55"
UCLED5-12A-9CSF	12"		
UCLED9-18A-9CSF	18"		
UCLED9-24A-9CSF	24"		
UCLED14-34A-9CSF	34"		
UCLED20-42A-9CSF	42"		
UCLED20-46A-9CSF	46"		

### ORDERING INFORMATION

Catalog Number	UPC	Easy Code
UCLED5-9A-9CSF	843654175133	TTQ-22
UCLED5-12A-9CSF	843654175140	GGC-56
UCLED9-18A-9CSF	843654175157	NAG-40
UCLED9-24A-9CSF	843654175164	JDP-01
UCLED14-34A-9CSF	843654175171	LVT-27
UCLED20-42A-9CSF	843654175188	JYI-26
UCLED20-46A-9CSF	843654175195	UMK-33

### CATALOG NUMBER BREAKDOWN

# UCLEDXX-XXA-9CSF

1 2 3 4 5 6 7 8

1 Under Cabinet

2 LED

3 Wattage

4 Size

5 Style

6 90 CRI

7 CCT Adjustable

8 CCT Adjustable Designation

8 CCT Adjustable Designation

F 2700/3000/3500/4000/5000K