

INSTALLATION AND OPERATING INSTRUCTIONS

KT-HBLEDD-PM-1.5F-KIT /G2

DESCRIPTION

Pendant Mount Kit for LED Highbay fixtures. Fits all Keystone “1.5F /G2” Highbay fixtures.

GENERAL SAFETY INFORMATION

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- DO NOT INSTALL DAMAGED PRODUCT!

STEM/PIPE MOUNTING KIT

Included with the Mounting Kit	
A	Mounting bracket - 1pc
B	Mounting bracket cover - 2pcs
C	Triangle lock screws - 6pcs
D	Flexible Conduit with Connectors - 1pc

1. Align the pipe mounting bracket on the fixture back plate as shown in the **Figure D-1**. Flexible metal conduit may be needed for some models. (**Figure D-1**)
2. Connect the line, neutral and ground wires and run them through the bracket hole. (**Figure D-2**).
3. Screw the hexagonal head screws into the rivet nuts to fix the pipe mounting bracket in place.
4. Cover the pipe mount bracket from all the sides using the bracket cover as shown. (**Figure D-2**).

Fig. D-1

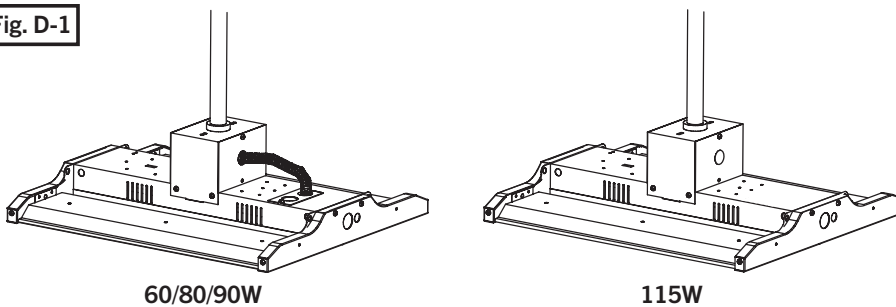


Fig. D-2

