



KTLD-12-UV-SC500-56-VDIM-AF1

CONSTANT POWER PROGRAMMABLE LED DRIVER

DESCRIPTION

LED Driver | 12W | 120–277V Input | 120–500mA Programmable Output Current



TOTAL POWER: 12W	OUTPUT CURRENT: 120–500mA
INPUT VOLTAGE: 120–277Vac ±10%	DIMMING: 0–10V
INPUT FREQUENCY: 50/60 Hz	WARRANTY: 5 Years



PRODUCT FEATURES

- Meets FCC Part 15 (Class B) consumer limits
- Short circuit overload and open load protection
- Dimmable with 0–10V dimmer (down to 1% at max. output current)
- THD: < 20%
- Flicker Free
- –40°C/–40°F to 50°C/122°F operating temperature
- 90°C/194°F maximum case temperature
- Input frequency: 60 Hz
- Programmable output current via Keystone supplied programming jig
- Class A Sound Rating

PROGRAMMING FEATURES

- Drive current (10mA increments)
- Minimum dimming level (1%, 3%, 5%, 7%, or 10%)
- Dimming curve (linear log, inverse log, or square-law)(.9V, 1V, 1.5V, 2V)
- Minimum dimming voltage (1V, 1.5V, or 2V)
- Maximum dimming voltage (7V, 8V, or 9V)
- Dim-to-off voltage (0.8V, 1V, 1.2V, or N/A)
- Thermal foldback temperature (75°C/167°F, 80°C/176°F, 85°C/185°F, or 90°C/194°F)

REQUIRED ACCESSORIES

Order Code	Description
KTLD-SC-ADPT-1C	AF1 and AF4 Case Adapter for Smart Current Programming
KTLD-SC-PGMR-1	Smart Current Programming Cradle with Micro-USB Cable

ELECTRICAL SPECIFICATIONS


Input Voltage Range	120–277Vac ±10%
Frequency	50/60 Hz
Power Factor	>0.9 under 120Vac Input with 80~100% load condition (for all output currents)
Inrush Current	20A @277V
Max. Input Current	0.14A @ 120V, 0.07A @ 240V and 0.06A @ 277V
THD	<20% under 120Vac input with 80~100% load condition (for all output currents)
Load Regulation	± 2%
Line Regulation	± 1%
Output Tolerance	± 5% at full load condition
Turn-On Delay Time	<0.50 seconds at full load condition
Overshoot	<0.5s at 50~100% load, input 120V
No Load Power Consumption	<1W
Ripple and Noise (pk-pk)	<10%
Withstand Voltage	Input to output, 2,800Vdc, 2mA
Leakage Current	Maximum 0.5mA at 277Vac, 60Hz input
Protection	<ul style="list-style-type: none"> • Over Voltage Protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. • Over Current Protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. • Short Circuit Protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.




KTLD-12-UV-SC500-56-VDIM-AF1

CONSTANT POWER PROGRAMMABLE LED DRIVER


LIFETIME VS CASE TEMPERATURE

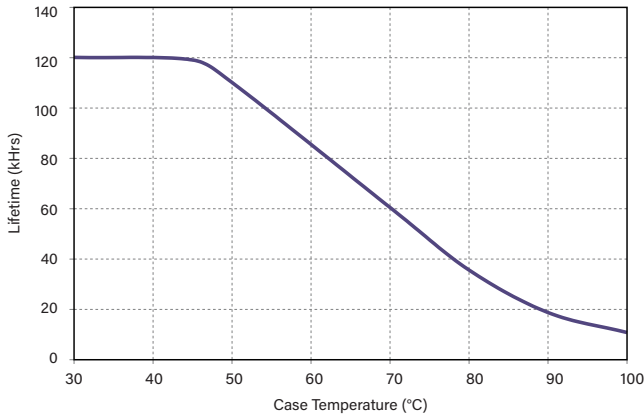


POWER DERATING VS CASE TEMPERATURE

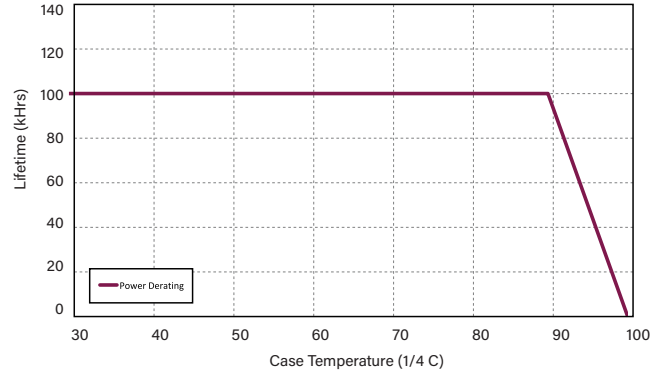


POWER FACTOR VS LOAD

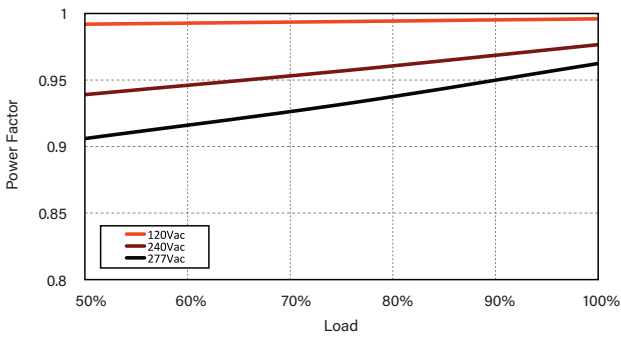


THD VS LOAD

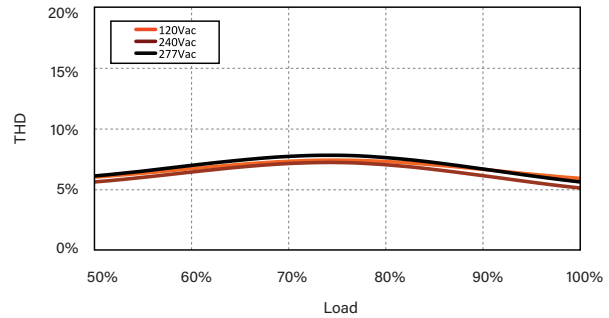

EFFICIENCY VS LOAD

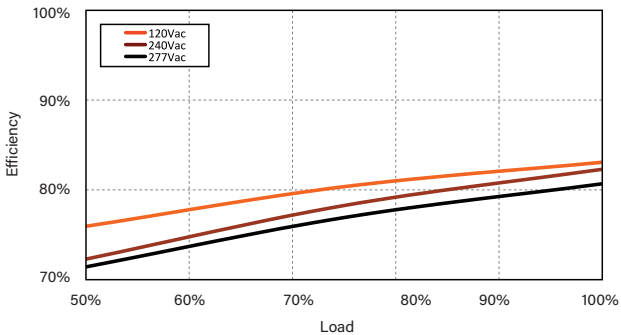

LED DRIVER OUTPUT WINDOW

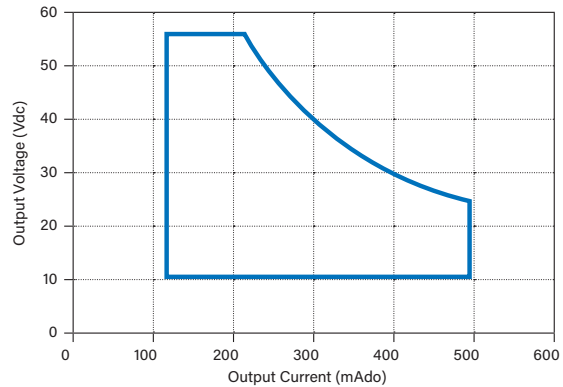




KTLD-12-UV-SC500-56-VDIM-AF1

CONSTANT POWER PROGRAMMABLE LED DRIVER

PRODUCT SPECIFICATIONS

Max. Output Power	Output Current	Output Voltage	OCV	Typical Efficiency at 120V	Typical Efficiency at 240V	Typical Efficiency at 277V	Remote Mounting Distance (#22 AWG)	Class 2	
								US	Canada
12W	120-500mA	10-56V	60V	85%	84%	83%	24 ft.	✓	


PHYSICAL SPECIFICATIONS

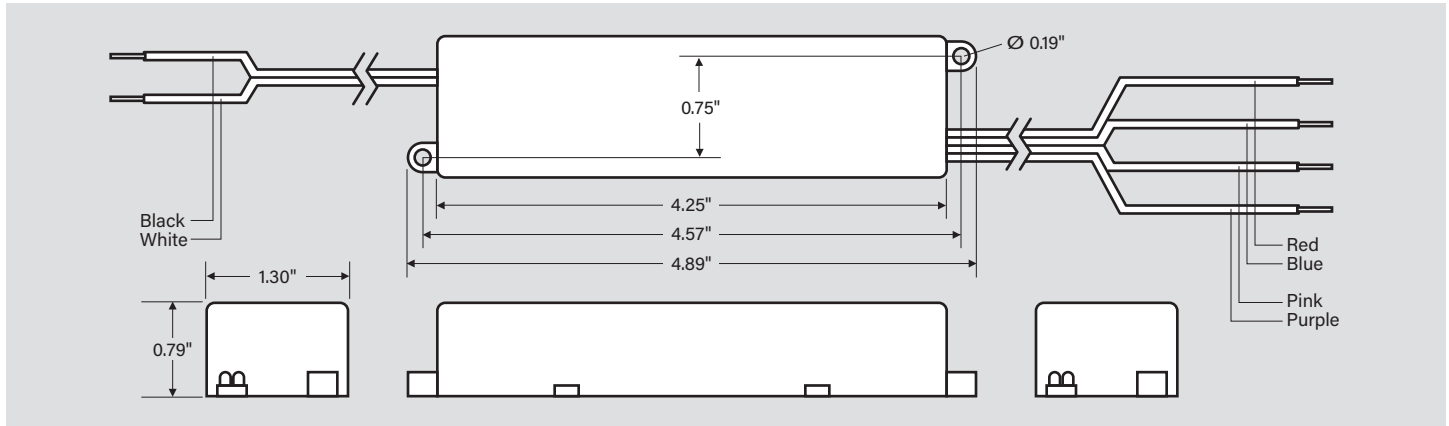

WIRING SPECIFICATIONS

Input	Black	12.00", UL 1316 #18AWG
	White	12.00", UL 1316 #18AWG
Output	Blue	12.00", UL 1430 #22AWG
	Red	12.00", UL 1430 #22AWG
Dimming	Purple	12.00", UL 1430 #22AWG
	Pink	12.00", UL 1430 #22AWG

WIRING DIAGRAM

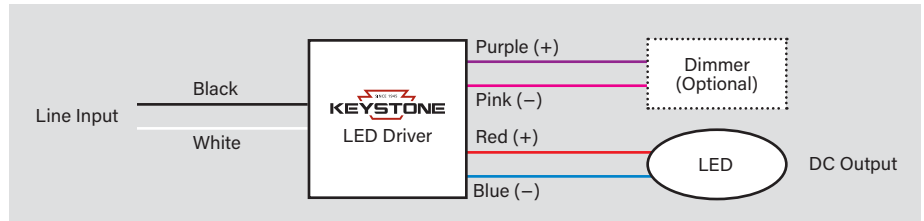

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C/-40°F to 60°C/140°F
Storage Temperature	-40°C/-40°F to 85°C/185°F
Humidity	5% to 95%
MTBF	358,000 hours at 40°C ambient (~70°C Case Temp)
Life Rating	85,000 hours at 120Vac input, 100% load and 60°C Case Temp
Maximum Case Temperature	90°C/194°F
Maximum Case Temperature (tc) for 5-Year Warranty	75°C/167°F

SAFETY AND EMC COMPLIANCE

UL/cUL	UL 8750, Class P, Type HL, UL1310 Class 2
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (consumer limit)
EN61000-3-2	Harmonic Current Emissions Class C



KTLD-12-UV-SC500-56-VDIM-AF1

CONSTANT POWER PROGRAMMABLE LED DRIVER

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QUANTITY	CARTON WEIGHT	ITEM STATUS
KTLD-12-UV-SC500-56-VDIM-AF1-CP	Carton Pack	40 Pcs	4.5Kg	Quick Ship

CATALOG NUMBER BREAKDOWN

KTLD-12-UV-SC500-56-VDIM-AF1-CP

1
2
3
4
5
6
7
8
9

- 1** Keystone Technologies LED Driver
- 2** Max. Output Wattage
- 3** 120-277V Input
- 4** Smart Current
- 5** Max. Output Current
- 6** Max. Output Voltage
- 7** 0-10V Dimming
- 8** Case Style
- 9** Packaging Style