

Distinctive. Elegant. Simple.







Beautifully simple

Linta: Architectural lighting from Keystone.


A linear direct/indirect fixture that's elegant, modern, and versatile. A fixture that's attuned to your style—and your project budget.

Linta fixtures link seamlessly with simple, intuitive connections. Join them together to form straight lines or angled figures. Easily transition the ambience of your space with field-adjustable uplighting and downlighting, and select the right color temperature and lumen output for any room with the touch of a switch.

The length and look is up to your imagination.

It's easy to specify, easy to order, and easy to install. And, in particular, easy to design the light you want in your space.

That's Linta by Keystone. Light Made Easy®.

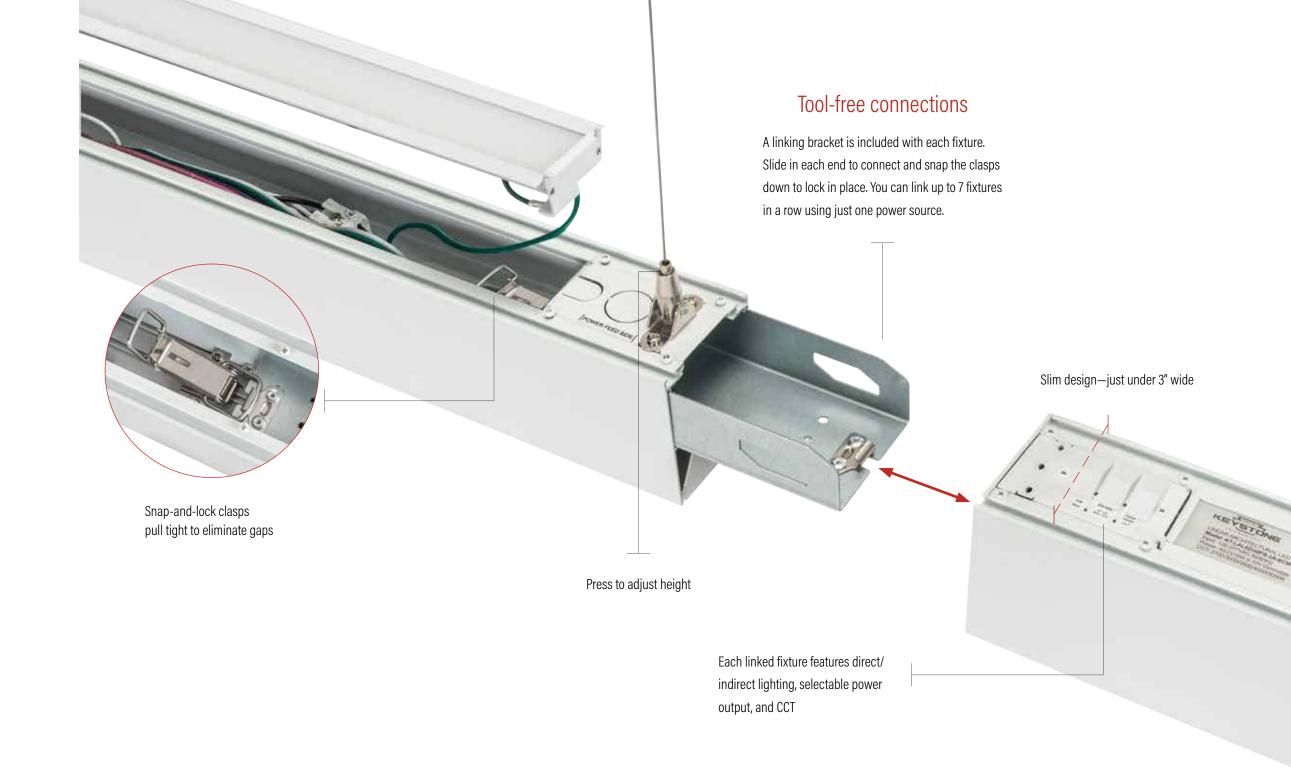

Simple connections


Linta is available in four lengths—2 feet, 3 feet, 4 feet, and 8 feet—as well as X shapes, T shapes, and L shapes.


Installation couldn't be simpler. The provided toolless brackets feature a snap-and-lock design that allows you to link fixtures seamlessly and firmly, and with pre-installed connectors, you can hook up power and dimming in seconds.

For an even smoother look, an optional 32-foot rolled polycarbonate lens can be cut to length to minimize seams on multiple fixture runs.

Endless configurations and possibilities

Create singular designs with distinctively shaped fixtures. Each features uniform lighting that eliminates corner hot spots. They also offer the same simple connections as our linear fixture.

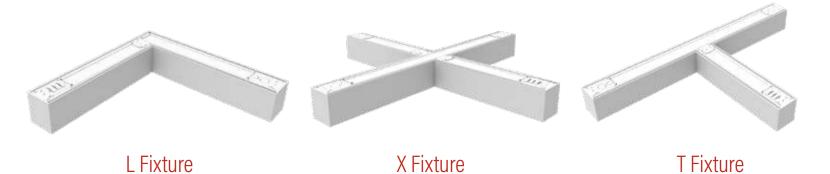

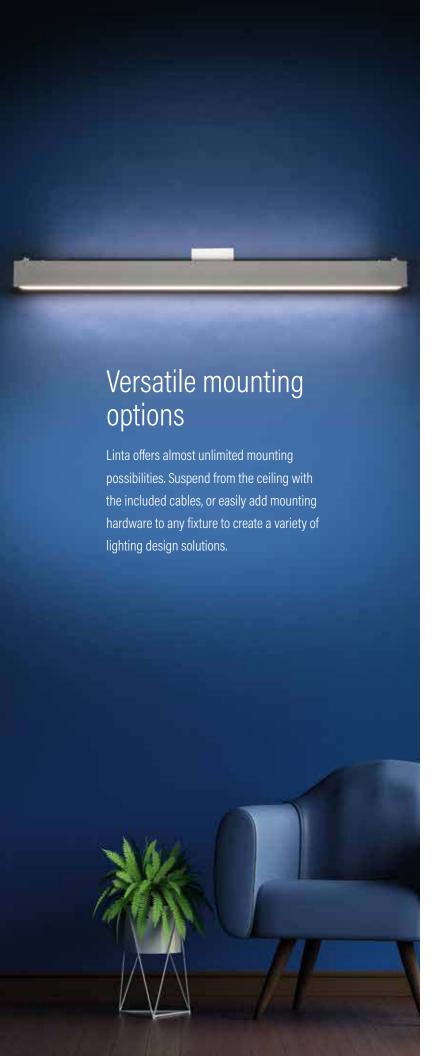



Hang as a pendant ...

Every Linta box includes two cable styles for pendant for pendant mounting from any ceiling:

- Standard 15' aircraft cable with tapped base coupler hardware
- Looped-end cables with adjustable "Y" grippers

A wide variety of canopy cover feed and non-feed kits are also available to suit all potential suspension installation needs.




It's 45 fixtures in just one elegant design.

Effortless illumination

With Linta, you get the power of many fixtures in one elegant design.

- Direct (downlighting) and indirect (uplighting) lighting settings are as easy as flicking a switch. Choose between:
- 100% direct
- 50% direct / 50% indirect
- 70% direct / 30% indirect
- Keystone Power Select technology with 3 selectable power outputs
- Keystone Color Select with 5 selectable CCT:
- 2700K, 3000K, 3500K, 4000K, and 5000K.



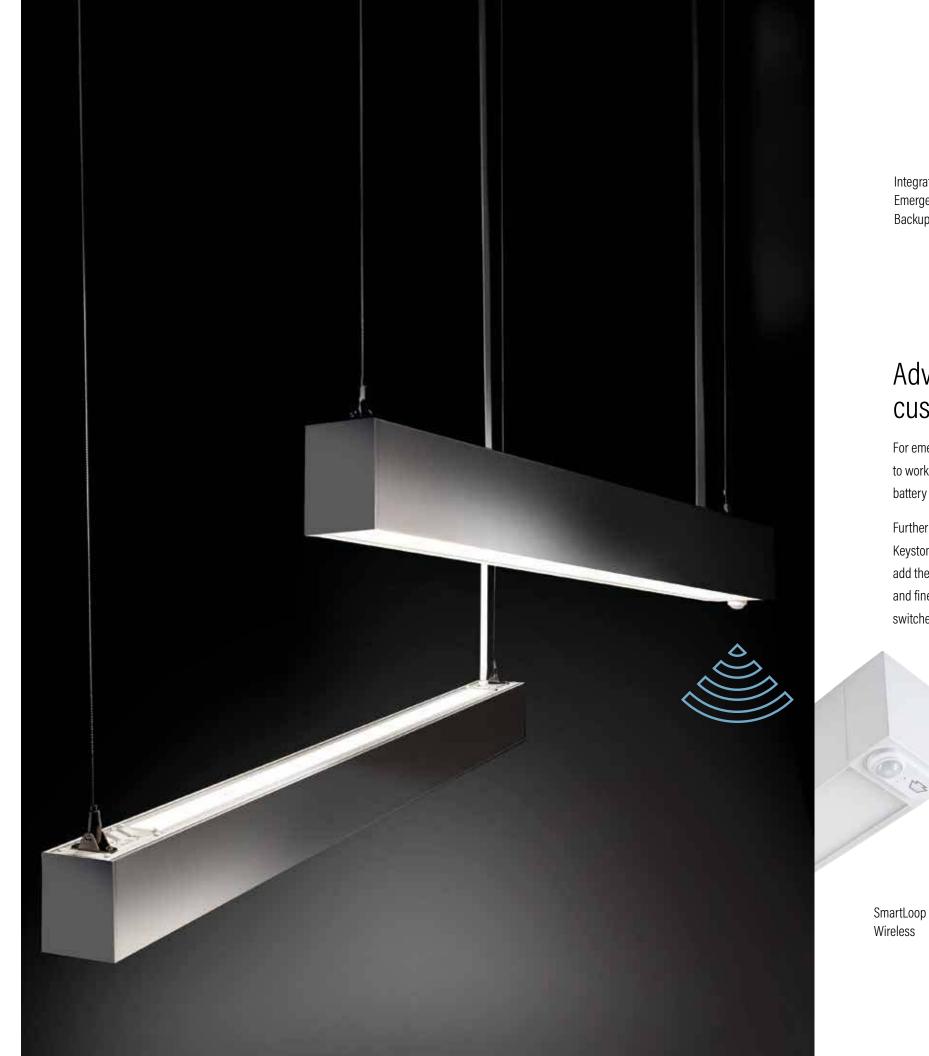




Integrated Emergency Backup

For emergency lighting needs, Linta is designed to work with Keystone SmartSafe emergency battery backups.

Further customize your Linta installation with Keystone SmartLoop wireless controls. Simply add the available custom-designed end cap and fine-tune the light beyond the selectable switches.





Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE Wattage	LUMENS	SELECTABLE CCT	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
		20W	2620	2700K 3000K 3500K 4000K 5000K					>80
KT-LALED20PS-2A-8CSF-VDIM	2' Linear	15W	1965		131 lm/W	120-277V	0-10V	Yes	
		12W	1575						
KT-LALED30PS-3A-8CSF-VDIM		30W	3930	2700K					
	3' Linear	23W	3015	3000K 3500K 4000K 5000K	131 lm/W	120-277V	0-10V	Yes	>80
		18W	2360						
		40W	5240	2700K 3000K 3500K 4000K				Yes	>80
KT-LALED40PS-4A-8CSF-VDIM	4' Linear	30W	3930		131 lm/W	120-277V	0-10V		
		25W	3275	5000K					
KT-LALED80PS-8A-8CSF-VDIM		80W	10480	2700K 3000K 3500K 4000K 5000K				Yes	>80
	8' Linear	60W	7860		131 lm/W	120-277V	0-10V		
		50W	6550						

Power and Color Select

CATALOG NUMBER	FIXTURE Shape	SELECTABLE WATTAGE	MAXIMUM LUMENS	SELECTABLE CCT	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
		26W	3250	2700K 3000K 3500K 4000K 5000K				Yes	>80
KT-LALED25PS-LA-8CSF-VDIM	L Shape	16W	4625		125 lm/W	120-277V	0-10V		
		20W	6250						
		37W	3250	2700K 3000K		125 lm/W 120-277V			>80
KT-LALED37PS-TA-8CSF-VDIM	T Shape	30W	4625		125 lm/W		0-10V	Yes	
		23W	6250	5000K					
	X Shape	50W	3250	2700K		125 lm/W 120-277V	0-10V Yes		>80
KT-LALED37PS-XA-8CSF-VDIM		38W	4625	3000K 3500K 4000K	125 lm/W			Yes	
		30W	6250	5000K					

White Canopy Kits

Create a streamlined, modern look with Keystone canopy kits. Our hardware and accessories add the finishing touch to your Linta installation.

Round

KT-LALED-CC-UNV-NF-KIT / A

Universal Canopy Cover Non-Feed Kit, J-Box/Stud/T-Bar/Drywall/Masonry Mount | 2" & 5" Circular Covers | 2 piece & 1 piece coupler | White. No aircraft cable included (re-use aircraft cable supplied with each fixture)





Feed Kit, J-Box Mount | 5" Circular | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" power feed circular canopy, (1) Crossbar with 1/4-20 screw, (1) 18/5 SJT sized strain relief, (5) cable ties, (NO POWER CORD INCLUDED)

KT-LALED-5CC-1-F-KIT



Non-Feed Kit, J-Box / Stud Mount | 5" Circular | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed circular canopy, (1) Crossbar with 1/4-20 screw



Non-Feed Kit, Drywall / Stud Mount | 2" Circular | White. Includes (1) 15' aircraft cable with cable coupler, (1) 2" non-feed circular canopy, (1) 1/4-20 Toggle Bolt Assembly, (1) 1/4-20 Lag Screw



Non-Feed Kit, T-Bar Mount | 2" Circular | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed circular canopy, (1) Drop Ceiling Clip / Stud



Non-Feed Kit, T-Bar Mount | 5" Circular | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed circular canopy, (1) Drop Ceiling Clip / Stud



Non-Feed Kit, Masonry Mount | 2" Circular | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed circular canopy, (1) 1/4-20 Stud (LAG SHIELD NOT INCLUDED)

Square

KT-LALED-SC-UNV-NF-KIT /A

Universal Canopy Cover Non-Feed Kit, J-Box/Stud/T-Bar/Drywall/Masonry Mount | 2" & 5" Square Covers | 2 piece & 1 piece coupler | White. No aircraft cable included (re-use aircraft cable supplied with each fixture)



Shows a typical

installation



Feed-Kit, J-Box Mount | 5" Square | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" power feed square canopy, (1) Crossbar with 1/4-20 screw, (1) 18/5 SJT sized strain relief, (5) cable ties, (NO POWER CORD INCLUDED)



Non-Feed Kit, J-Box / Stud Mount | 5" Square | White, Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed square canopy, (1) Crossbar with 1/4-20 screw



Non-Feed Kit, Drywall / Stud Mount | 2" Square | White, Includes (1) 15' aircraft cable with cable coupler. (1) 2" non-feed square canopy, (1) 1/4-20 Toggle Bolt Assembly, (1) 1/4-20 Lag Screw



KT-LALED-2SC-2-NF-KIT

Non-Feed Kit, T-Bar Mount | 2" Square | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed square canopy, (1) Drop Ceiling coupler, (1) 5" non-feed square canopy, (1) Drop Ceiling Clip / Stud



Non-Feed Kit, T-Bar Mount | 5" Square | White. Includes (1) 15' aircraft cable with 2 piece cable



Non-Feed Kit, Masonry Mount | 2" Square | White. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed square canopy, (1) 1/4-20 Stud (LAG SHIELD NOT INCLUDED)



Black Fixtures & Shapes

Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	SELECTABLE WATTAGE	LUMENS	SELECTABLE CCT	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
		20W	2620	2700K					>80
KT-LALED20PS-2A-8CSF-VDIM-B	2' Linear	15W	1965	3000K 3500K 4000K 5000K	131 lm/W	120-277V	0-10V	Yes	
		12W	1575						
KT-LALED30PS-3A-8CSF-VDIM-B		30W	3930	2700K					
	3' Linear	23W	3015	3000K 3500K 4000K	K 131 lm/W	120-277V	7V 0-10V	Yes	>80
		18W	2360	5000K					
		40W	5240	2700K 3000K 3500K 4000K	131 lm/W 120-277V				>80
KT-LALED40PS-4A-8CSF-VDIM-B	4' Linear	30W	3930			120-277V	0-10V	Yes	
		25W	3275	5000K					
KT-LALED80PS-8A-8CSF-VDIM-B	8' Linear	80W	10480	2700K 3000K 3500K 4000K 5000K					
		60W	7860		131 lm/W	120-277V	0-10V	Yes	>80
		50W	6550						

Power and Color Select

CATALOG NUMBER	FIXTURE Shape	SELECTABLE WATTAGE	MAXIMUM LUMENS	SELECTABLE CCT	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
		26W 3250 2700K							
KT-LALED25PS-LA-8CSF-VDIM-B	L Shape	16W	4625	3000K 3500K 4000K	125 lm/W	120-277V	0-10V	Yes	>80
		20W	6250	5000K					
		37W	3250	2700K	DK 125 lm/W	120-277V 0-10V		Yes	
KT-LALED37PS-TA-8CSF-VDIM-B	T Shape	30W	4625	3000K 3500K 4000K			0-10V		>80
		23W	6250	5000K					
	Shape 50W 3250 2700K 3000K 3000K 3500K 12 4000K 5000K	50W	3250	2700K			0-10V	Yes	>80
KT-LALED37PS-XA-8CSF-VDIM-B		38W	4625	1625 3500K 125	125 lm/W	120-277V			

Black Canopy Kits

Create a streamlined, modern look with Keystone canopy kits. Our hardware and accessories add the finishing touch to your Linta installation.

Round

KT-LALED-CC-UNV-NF-KIT-B /A

Universal Canopy Cover Non-Feed Kit, J-Box/Stud/T-Bar/Drywall/Masonry Mount | 2" & 5" Circular Covers | 2 piece & 1 piece coupler | Black. No aircraft cable included (re-use aircraft cable supplied with each fixture)





KT-LALED-5CC-1-F-KIT-B

Feed Kit, J-Box Mount | 5" Circular | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" power feed circular canopy, (1) Crossbar with 1/4-20 screw, (1) 18/5 SJT sized strain relief, (5) cable ties (NO POWER CORD INCLUDED)



KT-LALED-5CC-1-NF-KIT-B

Non-Feed Kit, J-Box / Stud Mount | 5" Circular | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed circular canopy, (1) Crossbar with 1/4-20 screw



KT-LALED-2CC-1-NF-KIT-B

Non-Feed Kit, Drywall / Stud Mount | 2" Circular | Black. Includes (1) 15' aircraft cable with cable coupler, (1) 2" non-feed circular canopy, (1) 1/4-20 Toggle Bolt Assembly, (1) 1/4-20 Lag Screw



KT-LALED-2CC-2-NF-KIT-B

Non-Feed Kit, T-Bar Mount | 2" Circular | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed circular canopy, (1) Drop Ceiling Clip / Stud



KT-LALED-5CC-2-NF-KIT-B

Non-Feed Kit, T-Bar Mount | 5" Circular | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed circular canopy, (1) Drop Ceiling Clip / Stud



KT-LALED-2CC-3-NF-KIT-B

Non-Feed Kit, Masonry Mount | 2" Circular | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed circular canopy, (1) 1/4-20 Stud (LAG SHIELD NOT INCLUDED)



Square

KT-LALED-SC-UNV-NF-KIT-B /A

Universal Canopy Cover Non-Feed Kit, J-Box/Stud/T-Bar/Drywall/Masonry Mount | 2" & 5" Square Covers | 2 piece & 1 piece coupler | Black. No aircraft cable included (re-use aircraft cable supplied with each fixture)





KT-LALED-5SC-1-F-KIT-B

Feed Kit, J-Box Mount | 5" Square | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" power feed square canopy, (1) Crossbar with 1/4-20 screw, (1) 18/5 SJT sized strain relief, (5) cable ties, (NO POWER CORD INCLUDED)



KT-LALED-5SC-1-NF-KIT-B

Non-Feed Kit, J-Box / Stud Mount | 5" Square | Black, Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed square canopy, (1) Crossbar with 1/4-20 screw



KT-LALED-2SC-1-NF-KIT-B

Non-Feed Kit, Drywall / Stud Mount | 2" Square | Black, Includes (1) 15' aircraft cable with cable coupler. (1) 2" non-feed square canopy, (1) 1/4-20 Toggle Bolt Assembly, (1) 1/4-20 Lag Screw



Non-Feed Kit, T-Bar Mount | 2" Square | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed square canopy, (1) Drop Ceiling coupler, (1) 5" non-feed square canopy, (1) Drop Ceiling Clip / Stud




KT-LALED-5SC-2-NF-KIT-B

Non-Feed Kit, T-Bar Mount | 5" Square | Black. Includes (1) 15' aircraft cable with 2 piece cable



KT-LALED-2SC-3-NF-KIT-B

Non-Feed Kit, Masonry Mount | 2" Square | Black. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed square canopy, (1) 1/4-20 Stud (LAG SHIELD NOT INCLUDED)



Power and Color Select

CATALOG NUMBER	NOMINAL Size	SELECTABLE WATTAGE	LUMENS	SELECTABLE CCT	EFFICACY	INPUT Voltage	DIMMABLE	DLC	CRI
		20W	2620	2700K 3000K 3500K 4000K 5000K				Yes	
KT-LALED20PS-2A-8CSF-VDIM-S	2' Linear	15W	1965		131 lm/W	120-277V	0-10V		>80
		12W	1575						
		30W	3930	2700K					
KT-LALED30PS-3A-8CSF-VDIM-S	3' Linear	23W	3015	3000K 3500K 4000K 5000K	131 lm/W	131 lm/W 120-277V	0-10V	Yes	>80
		18W	2360						
		40W	5240	2700K 3000K 3500K 4000K				Yes	
KT-LALED40PS-4A-8CSF-VDIM-S	4' Linear	30W	3930		131 lm/W	120-277V	0-10V		>80
		25W	3275	5000K					
	8' Linear	80W	10480	2700K 3000K 3500K 4000K 5000K				Yes	
KT-LALED80PS-8A-8CSF-VDIM-S		60W	7860		131 lm/W	120-277V	0-10V		>80
		50W	6550						

Power and Color Select*

CATALOG NUMBER	FIXTURE Shape	SELECTABLE WATTAGE	MAXIMUM LUMENS	SELECTABLE CCT	EFFICACY	INPUT VOLTAGE	DIMMABLE	DLC	CRI
		26W	3250	2700K	125 lm/W		0-10V	Yes	
KT-LALED25PS-LA-8CSF-VDIM-S	L Shape	16W	4625	3000K 3500K 4000K		120-277V			>80
		20W	6250	5000K					
		37W	3250	2700K	125 lm/W		0-10V	Yes	
KT-LALED37PS-TA-8CSF-VDIM-S	T Shape	30W	4625	3000K 3500K 4000K		120-277V			>80
		23W	6250	5000K					
		50W	3250	2700K 3000K 3500K 4000K			0-10V Ye		
KT-LALED37PS-XA-8CSF-VDIM-S	X Shape	38W	4625		125 lm/W	120-277V		Yes	>80
		30W	6250	5000K					

*Shapes for special order

Silver Canopy Kits*

Create a streamlined, modern look with Keystone canopy kits, Our hardware and accessories add the finishing touch to your Linta installation. *Silver Canopy Kits are special order

Round

KT-LALED-CC-UNV-NF-KIT-S /A

Universal Canopy Cover Non-Feed Kit, J-Box/Stud/T-Bar/Drywall/Masonry Mount | 2" & 5" Circular Covers | 2 piece & 1 piece coupler | Silver. No aircraft cable included (re-use aircraft cable supplied with each fixture)





KT-LALED-5CC-1-F-KIT-S

Feed Kit, J-Box Mount | 5" Circular | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" power feed circular canopy, (1) Crossbar with 1/4-20 screw, (1) 18/5 SJT sized strain relief, (5) cable ties (NO POWER CORD INCLUDED)



KT-LALED-5CC-1-NF-KIT-S

Non-Feed Kit, J-Box / Stud Mount | 5" Circular | Silver, Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed circular canopy, (1) Crossbar with 1/4-20 screw



KT-LALED-2CC-1-NF-KIT-S

Non-Feed Kit, Drywall / Stud Mount | 2" Circular | Black, Includes (1) 15' aircraft cable with cable coupler. (1) 2" non-feed circular canopy, (1) 1/4-20 Toggle Bolt Assembly, (1) 1/4-20 Lag Screw



KT-LALED-2CC-2-NF-KIT-S

Non-Feed Kit, T-Bar Mount | 2" Circular | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed circular canopy, (1) Drop Ceiling Clip / Stud



KT-LALED-5CC-2-NF-KIT-S

Non-Feed Kit, T-Bar Mount | 5" Circular | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed circular canopy, (1) Drop Ceiling coupler, (1) 2" non-feed circular canopy, (1) 1/4-20 Stud Clip / Stud



KT-LALED-2CC-3-NF-KIT-S

Non-Feed Kit, Masonry Mount | 2" Circular | Silver. Includes (1) 15' aircraft cable with 2 piece cable (LAG SHIELD NOT INCLUDED)



Square

KT-LALED-SC-UNV-NF-KIT-S /A

Universal Canopy Cover Non-Feed Kit, J-Box/Stud/T-Bar/Drywall/Masonry Mount | 2" & 5" Square Covers | 2 piece & 1 piece coupler | Silver. No aircraft cable included (re-use aircraft cable supplied with each fixture)



Shows a typical

installation



KT-LALED-5SC-1-F-KIT-S

Feed Kit, J-Box Mount | 5" Square | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" power feed square canopy, (1) Crossbar with 1/4-20 screw, (1) 18/5 SJT sized strain relief, (5) cable ties, (NO POWER CORD INCLUDED)



KT-LALED-5SC-1-NF-KIT-S

Non-Feed Kit, J-Box / Stud Mount | 5" Square | Silver, Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed square canopy, (1) Crossbar with 1/4-20 screw



KT-LALED-2SC-1-NF-KIT-S

Non-Feed Kit, Drywall / Stud Mount | 2" Square | Silver, Includes (1) 15' aircraft cable with cable coupler. (1) 2" non-feed square canopy, (1) 1/4-20 Toggle Bolt Assembly, (1) 1/4-20 Lag Screw



KT-LALED-2SC-2-NF-KIT-S

Non-Feed Kit, T-Bar Mount | 2" Square | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed square canopy, (1) Drop Ceiling Clip / Stud



KT-LALED-5SC-2-NF-KIT-S

Non-Feed Kit, T-Bar Mount | 5" Square | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 5" non-feed square canopy, (1) Drop Ceiling



KT-LALED-2SC-3-NF-KIT-S

Non-Feed Kit, Masonry Mount | 2" Square | Silver. Includes (1) 15' aircraft cable with 2 piece cable coupler, (1) 2" non-feed square canopy, (1) 1/4-20 Stud (LAG SHIELD NOT INCLUDED)

Mounting Kits & Accessories

Wall Mounts

ali Mourits			
CATALOG NUMBER	COLOR	DESCRIPTION	
KT-LALED-2A-WM-KIT	White		
KT-LALED-2A-WM-KIT-B	Black	Wall mounting kit for 2' fixtures. Includes standard length 5-wire wiring harness	
KT-LALED-2A-WM-KIT-S	Silver	·	
KT-LALED-3A-WM-KIT	White		
KT-LALED-3A-WM-KIT-B	Black	Wall mounting kit for 3' fixtures. Includes standard length 5-wire wiring harness	
KT-LALED-3A-WM-KIT-S	Silver	9	
KT-LALED-4A-WM-KIT	White		
KT-LALED-4A-WM-KIT-B	Black	Wall mounting kit for 4' fixtures. Includes standard length 5-wire wiring harness	
KT-LALED-4A-WM-KIT-S	Silver	, willing numess	
KT-LALED-8A-WM-KIT	White		
KT-LALED-8A-WM-KIT-B	Black	Wall mounting kit for 5' fixtures. Includes standard length 5-wire wiring harness	
KT-LALED-8A-WM-KIT-S	Silver		
KT-LALED-A-LBR-WM		Linking bracket for wall mount end-to-end daisy-chain connections. (Optional)	
KT-LALED-WH-WM-20-KIT		Extended length wire harness for wall mount kit, 20', 5-wire. For use with daisy-chain wall mount installations with a center power feed location	
KT-LALED-WH-WM-20EM-KIT		Extended length wire harness for wall mount kit, 20', 6-wire. For use with daisy-chain wall mount installations with a center power feed location for emergency backup needs (extra conductor for switch leg)	

Surface Mounts

CATALOG NUMBER	COLOR	DESCRIPTION
KT-LALED-2A-SM-KIT	White	
KT-LALED-2A-SM-KIT-B	Black	Surface mounting kit for 2' fixtures
KT-LALED-2A-SM-KIT-B	Silver	
KT-LALED-3A-SM-KIT	White	Surface mounting kit for 3' fixtures
KT-LALED-3A-SM-KIT-B	Black	
KT-LALED-3A-SM-KIT-B	Silver	
KT-LALED-4A-SM-KIT	White	
KT-LALED-4A-SM-KIT-B	Black	Surface mounting kit for 4' fixtures
KT-LALED-4A-SM-KIT-B	Silver	
KT-LALED-8A-SM-KIT	White	Surface mounting kit for 8' fixtures
KT-LALED-8A-SM-KIT-B	Black	
KT-LALED-8A-SM-KIT-B	Silver	

Recessed Mounts

COLOR	DESCRIPTION	
	Recessed mounting kit for 2' fixtures in drywall ceilings	
White	Recessed mounting kit for 3' fixtures in drywall ceilings	
- white	Recessed mounting kit for 4' fixtures in drywall ceilings	
	Recessed mounting kit for 8' fixtures in drywall ceilings	
	COLOR White	Recessed mounting kit for 2' fixtures in drywall ceilings Recessed mounting kit for 3' fixtures in drywall ceilings Recessed mounting kit for 4' fixtures in drywall ceilings Recessed mounting kit for 8' fixtures in

Cord and Wire Harness

CATALOG NUMBER	COLOR	DESCRIPTION			
KT-CS-NP-10-18/5-W /LA	White				
KT-CS-NP-10-18/5-W /LA-B	Black	10' input power cord, 18/5, 300V SJT. Includes power quick-connects and strain relief optimized for KT-LALED fixtures			
KT-CS-NP-10-18/5-W /LA-S	Silver				
KT-LALED-WH-MD-KIT		Wire harness kit for multi-directional power feed. Used in conjunction with an input power cord when the feed location is in center of run	人人		
KTSL-FC5-WH-23		Wiring harness for KTSL-FC5 fixture controllers. 23.6in long with mating connector. Low voltage.			

Sensors

COLOR	DESCRIPTION			
White		U:0 @		
Black	Bluetooth mesh wireless low-voltage individual fixture controller for SmartLoop system			
Silver		(3)		
White	End cap for Series A White Linear Arch Fixtures for use with SmartLoop KTSL-FC5-12V-IM-PIR.			
Black	End cap for Series A Black Linear Arch Fixtures for use with SmartLoop KTSL-FC5-12V-IM-PIR-B.			
Silver	End cap for Series A Black Linear Arch Fixtures for use with SmartLoop KTSL-FC5-12V-IM-PIR-B.			
	White Black Silver White Black	White Black Bluetooth mesh wireless low-voltage individual fixture controller for SmartLoop system Silver White End cap for Series A White Linear Arch Fixtures for use with SmartLoop KTSL-FC5-12V-IM-PIR. Black End cap for Series A Black Linear Arch Fixtures for use with SmartLoop KTSL-FC5-12V-IM-PIR-B. Silver End cap for Series A Black Linear Arch Fixtures for use with		

22 Continued on next page 23


Mounting Kits & Accessories

Lens



Additional Accessories

CATALOG NUMBER	COLOR	DESCRIPTION	
KT-LALED-CANOPY-1-KIT	White	Pair of 5" circular canopy covers, with included hardware to install	
KT-LALED-CANOPY-1-KIT-B	Black	(1) fixture: 1 power feed, 1 non-power feed. For use with standard J-box / stud mount installations. Compatible with aircraft cable	19203
KT-LALED-CANOPY-1-KIT-B	Silver	hardware included with each fixture	(O)
KT-LALED-A-EC-EM	White		
KT-LALED-A-EC-EM-B	Black	End cap for emergency backup test button	
KT-LALED-A-EC-EM-S	Silver	_	
KT-JBOX-4TB		4" octagon box / T-bar box. (3.5" across flats) Includes punch-outs to slide over T-bar grid	

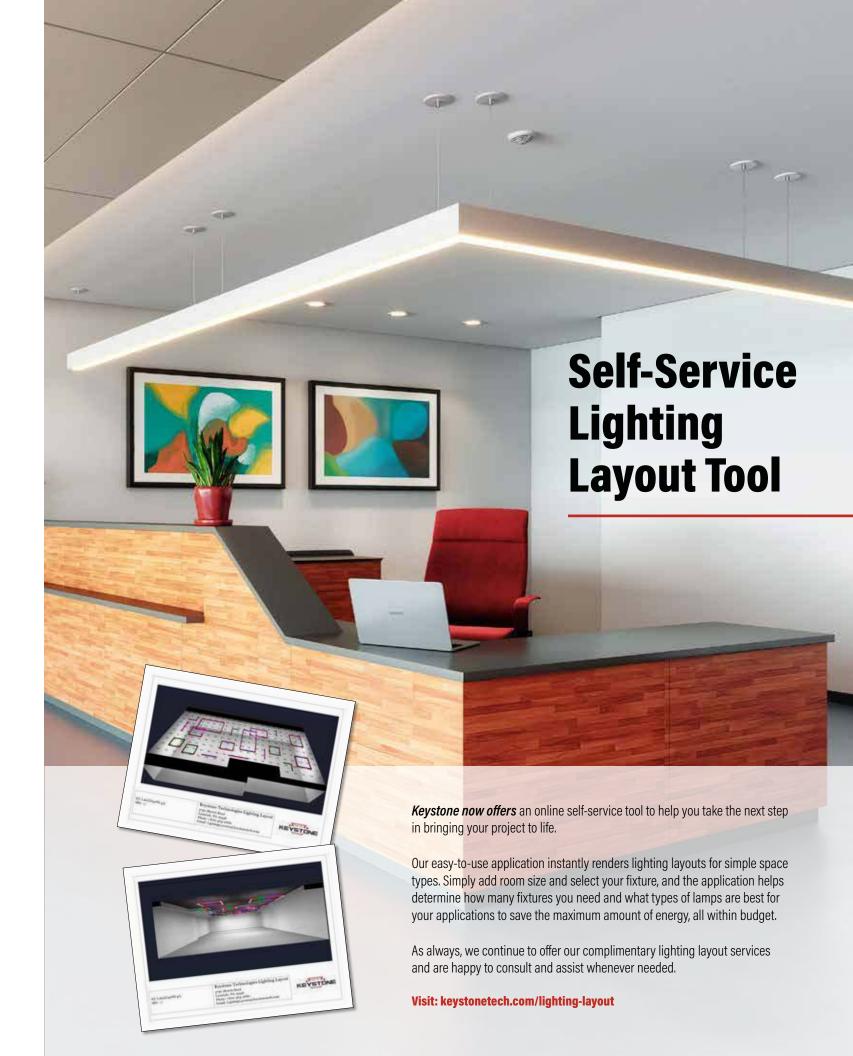

Louver Kits

Hexagonal Louver Kits	3	
CATALOG NUMBER	DESCRIPTION	
KT-LALED-2A-LVR-1-KIT	Hexagonal Louver Kit for 2ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-3A-LVR-1-KIT	Hexagonal Louver Kit for 3ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-4A-LVR-1-KIT	Hexagonal Louver Kit for 4ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-8A-LVR-1-KIT	Hexagonal Louver Kit for 8ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	

Hexagonal Louver Kits

CATALOG NUMBER	DESCRIPTION	
KT-LALED-LA-LVR-1-KIT	Hexagonal Louver Kit for L Shape Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-TA-LVR-1-KIT	Hexagonal Louver Kit for T Shape Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-XA-LVR-1-KIT	Hexagonal Louver Kit for X Shape Series A Linear Arch Fixtures. Louver compatible end caps sold separately	

Louver Kits

Straight Blade Louver	Kits	
CATALOG NUMBER	DESCRIPTION	
KT-LALED-2A-LVR-2-KIT	Straight Blade Louver Kit for 2ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-3A-LVR-2-KIT	Straight Blade Louver Kit for 3ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-4A-LVR-2-KIT	Straight Blade Louver Kit for 4ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-8A-LVR-2-KIT	Straight Blade Louver Kit for 8ft Series A Linear Arch Fixtures. Louver compatible end caps sold separately	

Straight Blade Louver Kits

CATALOG NUMBER	DESCRIPTION	
KT-LALED-LA-LVR-2-KIT	Straight Blade Louver Kit for L Shape Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-TA-LVR-2-KIT	Straight Blade Louver Kit for T Shape Series A Linear Arch Fixtures. Louver compatible end caps sold separately	
KT-LALED-XA-LVR-2-KIT	Straight Blade Louver Kit for X Shape Series A Linear Arch Fixtures. Louver compatible end caps sold separately	

Louver Kit End Caps

CATALOG NUMBER	COLOR	DESCRIPTION	
KT-LALED-A-EC-LVR	White	End Cap for Series A Linear Arch Fixtures for use with all Louver Kits	
KT-LALED-A-EC-LVR-B	Black	End Cap for Series A Linear Arch Fixtures for use with all Louver Kits	
KT-LALED-A-EC-LVR-S	Silver	End Cap for Series A Linear Arch Fixtures for use with all Louver Kits	



